



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

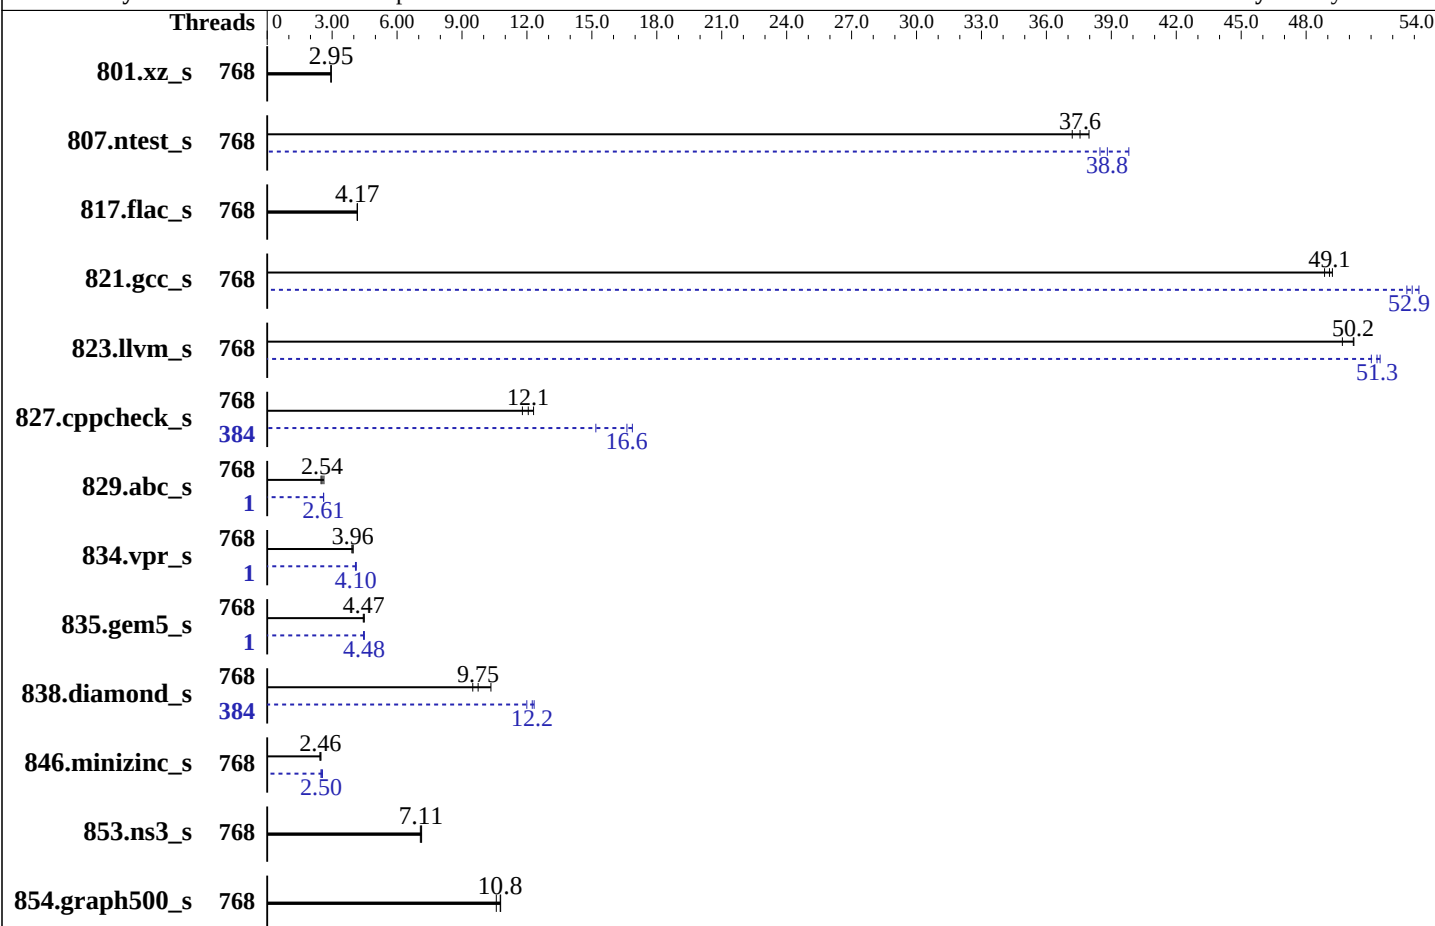

Hardware

CPU Name: AMD EPYC 9965
Max MHz: 3700
Nominal: 2250
Enabled: 384 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 16 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 3.2 TB PCIe NVMe SSD
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP6 (x86_64)
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 5.2.0 of AOCC
Fortran: Flang v22
Compiler Category: Vendor
Firmware: Version 1002 released Oct-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance
at the cost of additional power usage.



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	768	200	2.95	200	2.96	201	2.94	768	200	2.95	200	2.96	201	2.94
807.ntest_s	768	30.0	38.0	30.4	37.6	30.7	37.2	768	29.4	38.8	28.6	39.8	29.6	38.5
817.flac_s	768	417	4.16	417	4.17	417	4.17	768	417	4.16	417	4.17	417	4.17
821.gcc_s	768	42.2	49.1	42.4	48.9	42.1	49.2	768	39.3	52.7	38.9	53.2	39.1	52.9
823.llvm_s	768	28.1	50.2	28.1	50.2	28.4	49.7	768	27.7	51.0	27.4	51.4	27.5	51.3
827.cppcheck_s	768	94.9	11.8	90.9	12.3	92.8	12.1	384	73.7	15.2	66.3	16.9	67.3	16.6
829.abc_s	768	328	2.54	334	2.49	317	2.62	1	319	2.61	320	2.60	319	2.61
834.vpr_s	768	244	3.91	241	3.96	241	3.97	1	234	4.08	233	4.10	232	4.11
835.gem5_s	768	254	4.48	255	4.47	257	4.44	1	254	4.48	256	4.45	254	4.48
838.diamond_s	768	96.8	10.3	105	9.50	103	9.75	384	83.5	12.0	81.7	12.2	81.2	12.3
846.minizinc_s	768	270	2.48	275	2.44	273	2.46	768	269	2.49	262	2.55	268	2.50
853.ns3_s	768	163	7.08	162	7.11	162	7.13	768	163	7.08	162	7.11	162	7.13
854.graph500_s	768	57.7	10.6	56.8	10.8	56.7	10.8	768	57.7	10.6	56.8	10.8	56.7	10.8

SPECspeed®2026_int_base = **8.46**

SPECspeed®2026_int_peak = **8.96**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>
Flang v22 is available at
<https://flang.llvm.org/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance

runcpu command invoked through numactl i.e.:
numactl --physcpubind=0-15 runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-767"
LD_LIBRARY_PATH =
"/aocc520/amd_speed_aocc520_znver5_A_lib/lib:/aocc520/amd_speed_aocc520_
znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_THREAD_LIMIT = "768"

General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04

Platform Notes

BIOS Configuration:
SR-IOV Support = Disabled
SVM Mode = Disabled
Determinism Control = Manual
DRAM Scrub time = Disabled
Engine Boost = Aggressive
TDP Control = Manual
TDP = 500
PPT Control = Manual
PPT = 500
BMC Configuration:
Fan mode = Full speed mode

Sysinfo program /aocc520/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Wed Jul 22 12:20:10 2026

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -srvm
Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64
```

```
2. w
12:20:10 up 2:17, 1 user, load average: 84.62, 109.15, 74.06
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             10:03    18.00s 2.79s   0.00s /bin/bash ./speed.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Platform Notes (Continued)

data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	3090993
max locked memory	(kbytes, -l)	2048
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	3090993
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./speed.sh
python3 ./run_amd_speed_aocc520_znver5_A1.py
runcpu --config amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc520_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.174/templogs/preenv.intspeed.174.0.log --lognum 174.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /aocc520
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9965 192-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb10104e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 192
siblings       : 384
2 physical ids (chips)
768 processors (hardware threads)
physical id 0: core ids 0-191
physical id 1: core ids 0-191
physical id 0: apicids 0-383
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Platform Notes (Continued)

physical id 1: apicids 512-895

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      768
On-line CPU(s) list:         0-767
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9965 192-Core Processor
BIOS Model name:             AMD EPYC 9965 192-Core Processor      Unknown CPU @ 2.2GHz
BIOS CPU family:             107
CPU family:                  26
Model:                       17
Thread(s) per core:          2
Core(s) per socket:          192
Socket(s):                   2
Stepping:                    0
Frequency boost:              enabled
CPU(s) scaling MHz:          61%
CPU max MHz:                 3700.1951
CPU min MHz:                 1500.0000
BogoMIPS:                    4492.96
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                             rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                             extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                             sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                             cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                             osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                             perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                             ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                             smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                             xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                             xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                             nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                             pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                             avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Platform Notes (Continued)

avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

L1d cache: 18 MiB (384 instances)
L1i cache: 12 MiB (384 instances)
L2 cache: 384 MiB (384 instances)
L3 cache: 768 MiB (24 instances)

NUMA node(s): 2
NUMA node0 CPU(s): 0-191,384-575
NUMA node1 CPU(s): 192-383,576-767

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	18M	12	Data	1	64	1	64
L1i	32K	12M	8	Instruction	1	64	1	64
L2	1M	384M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-191,384-575
node 0 size: 386048 MB
node 0 free: 383992 MB
node 1 cpus: 192-383,576-767
node 1 size: 386725 MB
node 1 free: 385528 MB
node distances:
node 0 1
0: 10 32
1: 32 10

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 791321068 kB

10. who -r

run-level 3 Jul 22 10:03

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect postfix
purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned udisks2

indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

root=UUID=8bcfdda5-8f30-49cc-9aa9-2e306fa29252

splash=silent

mitigations=auto

quiet

security=apparmor

video=1024x768

14. cpupower frequency-info

analyzing CPU 19:

current policy: frequency should be within 1.50 GHz and 2.25 GHz.

The governor "performance" may decide which speed to use
within this range.

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Platform Notes (Continued)

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Platform Notes (Continued)

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /aocc520

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xfs	2.8T	287G	2.6T	11%	/

21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.
Product: RS720A-E13-RS8U
Product Family: Server
Serial: 123456789012

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x Samsung M321R4GA3PB2-CCPEC 32 GB 2 rank 6400
12x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400
6x Samsung M321R4GA3PB2-CCPPC 32 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 1002
BIOS Date: 10/14/2025
BIOS Revision: 10.2

Compiler Version Notes

C | 854.graph500_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin

```
=====
C++      | 807.ntest_s(base, peak) 827.cppcheck_s(base, peak) 853.ns3_s(base,
          | peak)
-----
```

AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin

```
=====
C++, C   | 801.xz_s(base, peak) 817.flac_s(base, peak) 821.gcc_s(base, peak)
          | 823.llvm_s(base, peak) 829.abc_s(base, peak) 834.vpr_s(base, peak)
          | 835.gem5_s(base, peak) 838.diamond_s(base, peak)
          | 846.minizinc_s(base, peak)
-----
```

AMD clang version 17.0.6 (CLANG: AOCC_5.2.0-Build#2035 2026_04_10)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.2.0-4925-2035/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

801.xz_s: -DSPEC_LP64

807.ntest_s: -DSPEC_LP64

817.flac_s: -DSPEC_LP64

821.gcc_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Base Portability Flags (Continued)

823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -fno-finite-math-only -DSPEC_LP64
835.gem5_s: -fno-finite-math-only -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -fno-finite-math-only -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays
-fstrip-mining -fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm -fopenmp=libomp -lomp

C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -fopenmp -DSPEC_OPENMP
-fvirtual-function-elimination -fvisibility=hidden -lamdalloc
-lamdlibm -fopenmp=libomp -lomp

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp -lomp



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Base Other Flags

C benchmarks:

-Wno-return-type

Benchmarks using both C and C++:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

854.graph500_s: basepeak = yes

C++ benchmarks:

807.ntest_s: -m64 -std=c++17

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false

-fprofile-instr-generate(pass 1) -fprofile-instr-use(pass 2)

-Ofast -flto -march=znver5 -fveclib=AMDLIBM -ffast-math

-zopt -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=100 -fopenmp -DSPEC_OPENMP

-fvirtual-function-elimination -fvisibility=hidden

-lamdalloc -lamdlibm -fopenmp=libomp -lomp

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Peak Optimization Flags (Continued)

827.cppcheck_s: Same as 807.ntest_s

853.ns3_s: basepeak = yes

Benchmarks using both C and C++:

801.xz_s: basepeak = yes

817.flac_s: basepeak = yes

821.gcc_s: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-fprofile-instr-generate(pass 1) -fprofile-instr-use(pass 2)
-Ofast -flto -march=znver5 -fveclib=AMDLIBM -ffast-math
-zopt -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -mllvm -unroll-threshold=100
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

823.llvm_s: Same as 821.gcc_s

829.abc_s: Same as 821.gcc_s

834.vpr_s: Same as 821.gcc_s

835.gem5_s: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -mllvm -unroll-threshold=100
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp
-lomp

838.diamond_s: Same as 821.gcc_s

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2026_int_base = 8.46

SPECspeed®2026_int_peak = 8.96

CPU2026 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2026

Hardware Availability: Mar-2025

Software Availability: May-2026

Peak Optimization Flags (Continued)

846.minizinc_s: Same as 821.gcc_s

Peak Other Flags

C benchmarks:

-Wno-return-type

Benchmarks using both C and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-08-11.html>

<http://www.spec.org/cpu2026/results/flags/ASUSTekPlatform-Settings-AMD-K15-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-08-11.xml>

<http://www.spec.org/cpu2026/results/flags/ASUSTekPlatform-Settings-AMD-K15-V1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-22 00:20:10-0400.

Report generated on 2026-08-11 18:28:04 by CPU2026 PDF formatter (unknown).

Originally published on 2026-08-11.