



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087


Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

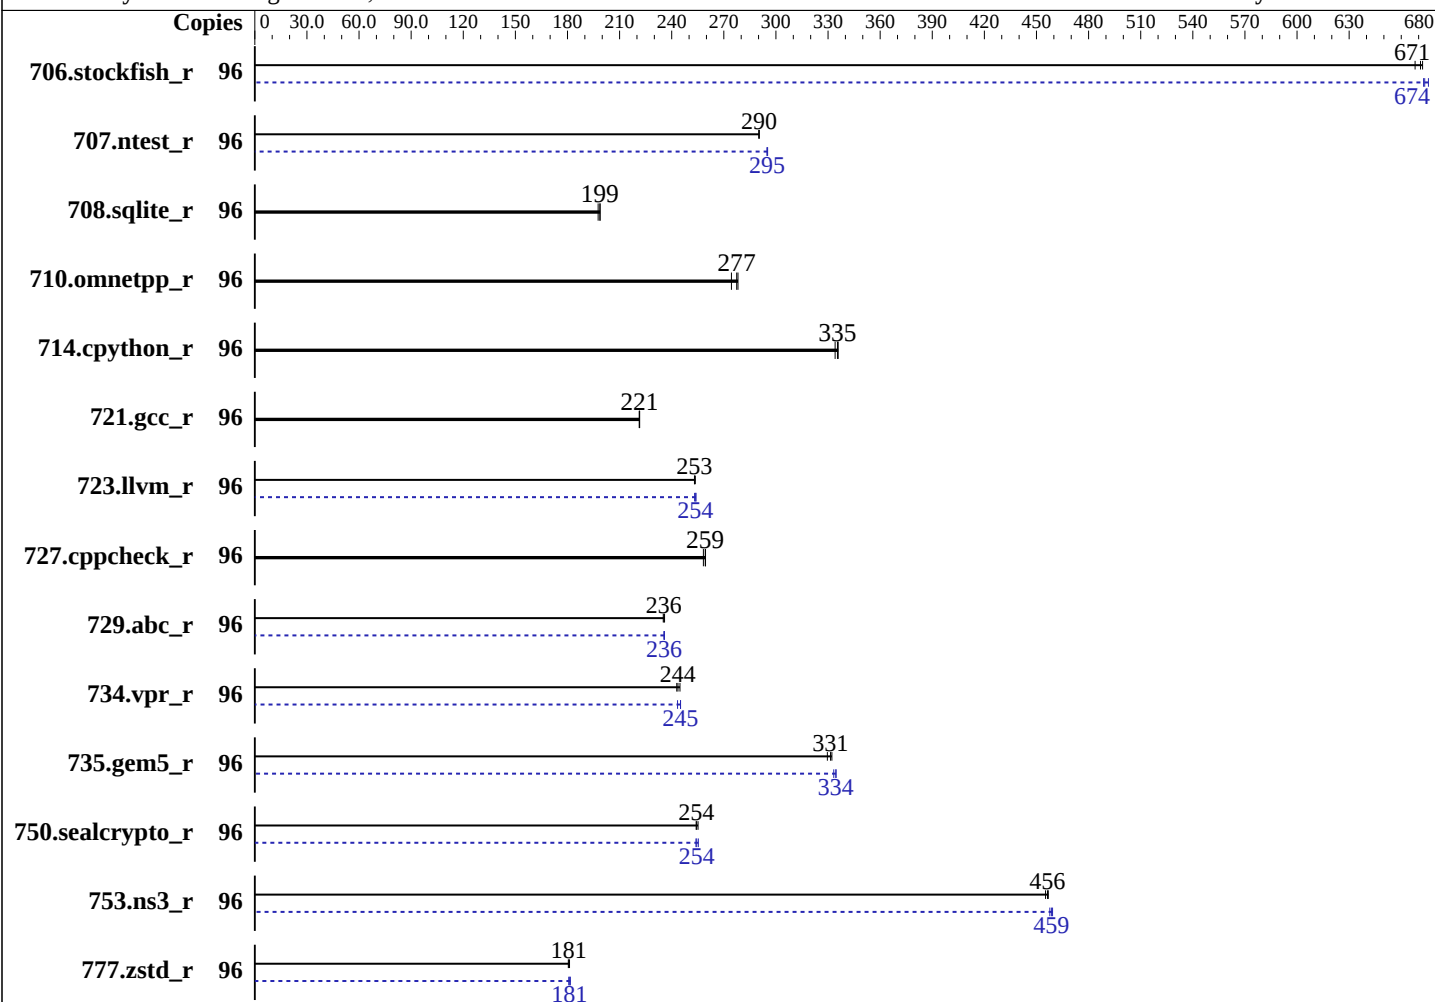

Hardware

CPU Name: AMD EPYC 9255
Max MHz: 4300
Nominal: 3200
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 4 TB NVME SSD
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category: Vendor
Firmware: Version 01.14.00 released Dec-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	96	181	668	180	672	180	671	96	180	673	179	676	180	674
707.ntest_r	96	196	290	196	290	196	290	96	193	295	193	295	193	295
708.sqlite_r	96	255	199	255	199	256	198	96	255	199	255	199	256	198
710.omnetpp_r	96	168	277	168	278	170	274	96	168	277	168	278	170	274
714.cpython_r	96	137	336	137	335	138	334	96	137	336	137	335	138	334
721.gcc_r	96	297	221	298	221	297	222	96	297	221	298	221	297	222
723.llvm_r	96	192	254	192	253	192	253	96	192	254	192	254	192	253
727.cppcheck_r	96	133	259	133	258	133	259	96	133	259	133	258	133	259
729.abc_r	96	187	235	187	236	187	236	96	187	236	187	236	187	236
734.vpr_r	96	181	245	182	244	182	243	96	182	243	181	245	181	245
735.gem5_r	96	141	332	141	331	142	330	96	140	333	140	334	140	335
750.sealcrypto_r	96	202	255	203	254	202	254	96	202	254	202	255	203	254
753.ns3_r	96	129	457	129	456	129	455	96	129	458	128	459	128	459
777.zstd_r	96	343	180	341	181	342	181	96	341	181	342	181	340	182

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2026_int_base = 283

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/CPU2026/amd_rate_aocc510_znver5_B_lib/lib:/home/CPU2026/amd_rate_
aocc510_znver5_B_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Platform Notes

BIOS configuration:
NUMA nodes per socket = NPS4
Determinism Slider = Power
cTDP Control = Manual
cTDP = 500
Package Power Limit Control = Manual
Package Power Limit = 500

Sysinfo program /home/CPU2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Mon Jun 29 19:59:40 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvvm
2. w
3. Username

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
-----
1. uname -srvrm
Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64
```

```
-----
2. w
19:59:40 up 9 days, 1:57, 2 users, load average: 0.07, 0.02, 0.00
USER      TTY      FROM          LOGIN@      IDLE   JCPU   PCPU WHAT
root      tty1      -              20Jun26 12.00s  3.51s  1.87s python3 ./run_amd_rate_aocc510_znver5_B1.py
root      tty2      -              19:10   35:08   0.11s  0.08s  vi run_amd_rate_aocc500_znver5_A1.py
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6190573
max locked memory       (kbytes, -l) 2048
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2026_int_base = 283

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6190573
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc510_znver5_B1.py
runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2026
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9255 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00215a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0:  core ids 0-5,8-13,16-21,24-29
physical id 1:  core ids 0-5,8-13,16-21,24-29
physical id 0:  apicids 0-11,16-27,32-43,48-59
physical id 1:  apicids 64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9255 24-Core Processor
CPU family: 26
Model: 2
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 106%
CPU max MHz: 3200.0000
CPU min MHz: 1500.0000
BogoMIPS: 6390.39
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no amd_lbr_pmc_freeze
Virtualization: AMD-V
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5, 48-53

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2026_int_base = 283

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

NUMA node1 CPU(s): 6-11, 54-59
NUMA node2 CPU(s): 12-17, 60-65
NUMA node3 CPU(s): 18-23, 66-71
NUMA node4 CPU(s): 24-29, 72-77
NUMA node5 CPU(s): 30-35, 78-83
NUMA node6 CPU(s): 36-41, 84-89
NUMA node7 CPU(s): 42-47, 90-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-5, 48-53
node 0 size: 193055 MB
node 0 free: 192575 MB
node 1 cpus: 6-11, 54-59
node 1 size: 193532 MB
node 1 free: 193191 MB
node 2 cpus: 12-17, 60-65
node 2 size: 193532 MB
node 2 free: 193257 MB
node 3 cpus: 18-23, 66-71
node 3 size: 193532 MB
node 3 free: 193177 MB
node 4 cpus: 24-29, 72-77

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
node 4 size: 193532 MB
node 4 free: 193208 MB
node 5 cpus: 30-35,78-83
node 5 size: 193494 MB
node 5 free: 193170 MB
node 6 cpus: 36-41,84-89
node 6 size: 193532 MB
node 6 free: 193187 MB
node 7 cpus: 42-47,90-95
node 7 size: 193457 MB
node 7 free: 193088 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10
```

```
-----
9. /proc/meminfo
   MemTotal:      1584814552 kB
```

```
-----
10. who -r
    run-level 3 Jun 20 18:02
```

```
-----
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
    Default Target    Status
    multi-user        running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled           YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                  issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
                  nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
enabled-runtime   systemd-remount-fs
disabled          autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                  firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                  kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                  serial-getty@ smartd-generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2026_int_base = 283

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

indirect
systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync
systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default  
root=UUID=b599d87c-474e-4c72-b781-36d0bcdcf18d  
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 44:  
current policy: frequency should be within 1.50 GHz and 3.20 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
  
boost state support:  
Supported: yes  
Active: yes
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance
```

16. sysctl

```
kernel.numa_balancing          1  
kernel.randomize_va_space      0  
vm.compaction_proactiveness     20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                  0  
vm.dirty_expire_centisecs      3000  
vm.dirty_ratio                  8  
vm.dirty_writeback_centisecs    500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold            500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                 0  
vm.nr_hugepages_mempolicy       0  
vm.nr_overcommit_hugepages      0  
vm.swappiness                    1
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2026_int_base = 283

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

```
-----
20. Disk information
SPEC is set to: /home/CPU2026
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs   929G  73G  857G   8% /
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:          Maginfraco
Product:         QR8228-D3
Product Family:  Not specified
Serial:          00000000
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Platform Notes (Continued)

11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400

1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: 01.14.00

BIOS Date: 12/25/2025

Compiler Version Notes

```
=====  
C      | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base,  
      | peak)  
-----
```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

```
=====  
C++    | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)  
      | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)  
-----
```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

```
=====  
C++, C | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base,  
      | peak) 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base,  
      | peak) 750.sealcrypto_r(base, peak)  
-----
```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2026_int_base = 283

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc
```



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2026_int_base = 283

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Peak Optimization Flags

C benchmarks:

708.sqlite_r: basepeak = yes

714.cpython_r: basepeak = yes

777.zstd_r: -m64 -std=c18

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIB -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-fstrip-mining -mllvm -reduce-array-computations=3 -zopt
-lamdlibm -lamdalloc -lflang

C++ benchmarks:

706.stockfish_r: -m64 -std=c++17

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIB -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc

707.ntest_r: Same as 706.stockfish_r

727.cppcheck_r: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

Peak Optimization Flags (Continued)

```
753.ns3_r: -m64 -std=c++17
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver5 -fveclib=AMDLIB -flto
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

710.omnetpp_r: basepeak = yes

721.gcc_r: basepeak = yes

```
723.llvm_r: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIB -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc
```

729.abc_r: Same as 723.llvm_r

```
734.vpr_r: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver5 -fveclib=AMDLIB -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-fstrip-mining -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc -lflang
```

735.gem5_r: Same as 734.vpr_r

750.sealcrypto_r: Same as 723.llvm_r



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9255)

SPECrate®2026_int_base = 283

SPECrate®2026_int_peak = 284

CPU2026 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Dec-2025

Software Availability: Jan-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html>

<http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml>

<http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-29 19:59:39-0400.

Report generated on 2026-08-26 13:56:16 by CPU2026 PDF formatter (unknown).

Originally published on 2026-08-25.