



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

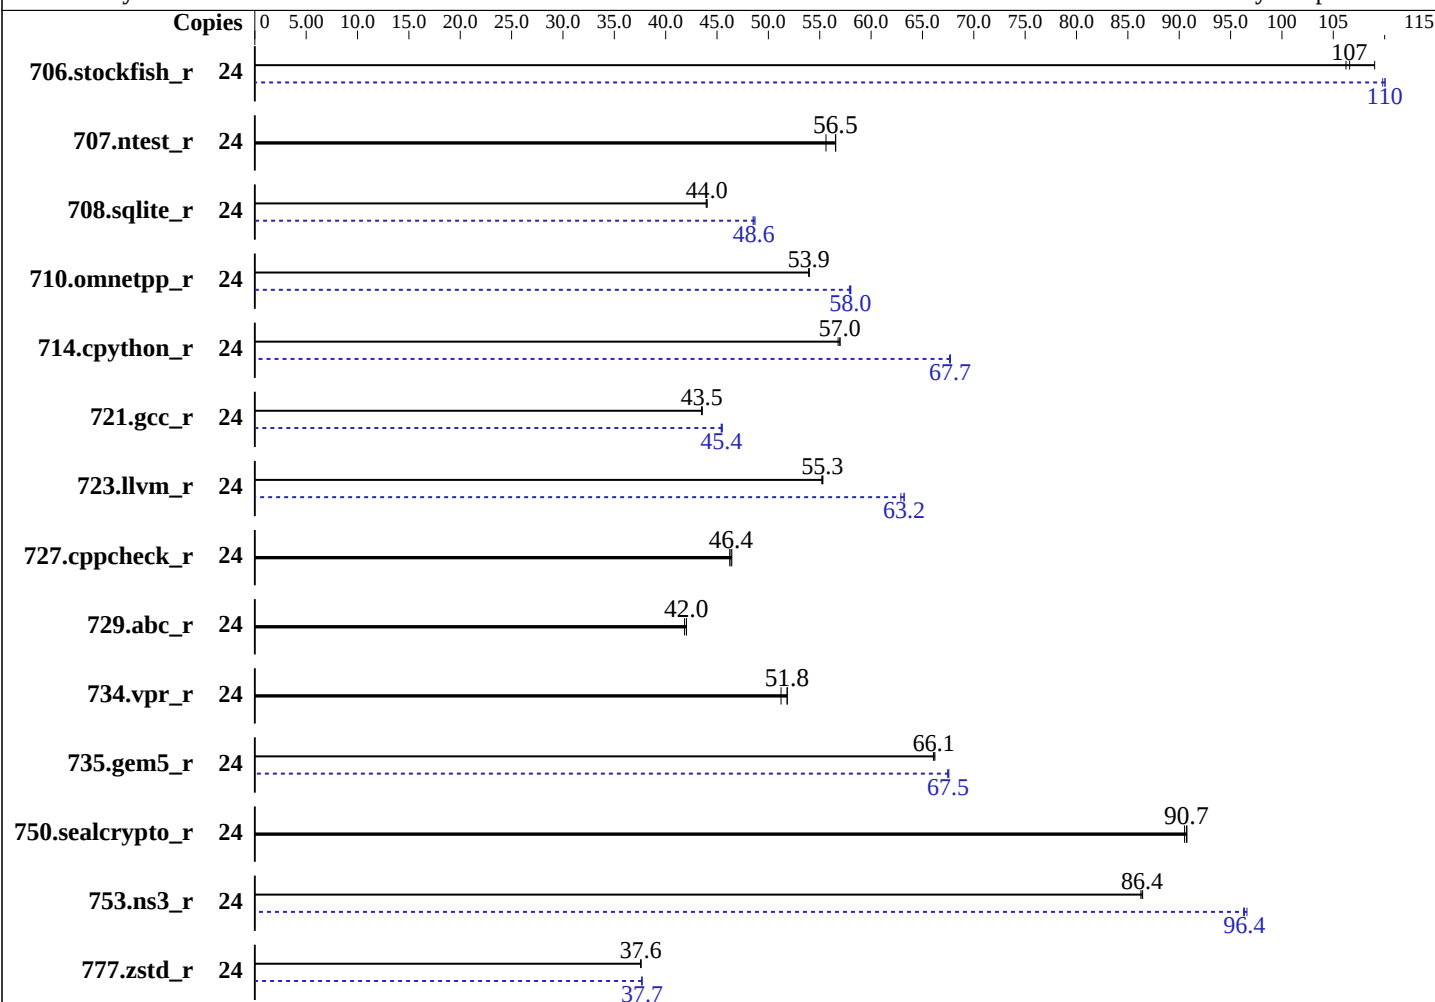

Hardware

CPU Name: Intel Xeon 6377P
Max MHz: 5700
Nominal: 3100
Enabled: 12 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 36 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400)
Storage: 1 x 960 GB NVMe SSD
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.53.6-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: HPE BIOS Version v2.50 06/25/2026 released Jun-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: tcmalloc memory allocator v2.18.1

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Software (Continued)

Power Management: BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	24	277	109	285	106	<u>284</u>	<u>107</u>	24	275	110	275	110	<u>275</u>	<u>110</u>
707.ntest_r	24	255	55.6	<u>251</u>	<u>56.5</u>	251	56.6	24	255	55.6	<u>251</u>	<u>56.5</u>	251	56.6
708.sqlite_r	24	288	43.9	288	44.0	<u>288</u>	<u>44.0</u>	24	261	48.5	260	48.7	<u>261</u>	<u>48.6</u>
710.omnetpp_r	24	216	54.0	<u>216</u>	<u>53.9</u>	216	53.9	24	<u>201</u>	<u>58.0</u>	201	58.0	201	57.9
714.cpython_r	24	202	57.0	<u>202</u>	<u>57.0</u>	202	56.8	24	170	67.6	<u>170</u>	<u>67.7</u>	170	67.7
721.gcc_r	24	379	43.5	<u>378</u>	<u>43.5</u>	378	43.6	24	<u>362</u>	<u>45.4</u>	363	45.4	362	45.5
723.llvm_r	24	220	55.3	<u>220</u>	<u>55.3</u>	220	55.2	24	193	62.9	192	63.2	<u>193</u>	<u>63.2</u>
727.cppcheck_r	24	186	46.4	186	46.2	<u>186</u>	<u>46.4</u>	24	186	46.4	186	46.2	<u>186</u>	<u>46.4</u>
729.abc_r	24	<u>262</u>	<u>42.0</u>	263	41.8	262	42.0	24	<u>262</u>	<u>42.0</u>	263	41.8	262	42.0
734.vpr_r	24	<u>214</u>	<u>51.8</u>	216	51.2	213	51.8	24	<u>214</u>	<u>51.8</u>	216	51.2	213	51.8
735.gem5_r	24	177	66.1	<u>177</u>	<u>66.1</u>	177	66.2	24	173	67.6	<u>173</u>	<u>67.5</u>	173	67.5
750.sealcrypto_r	24	<u>142</u>	<u>90.7</u>	142	90.5	142	90.8	24	<u>142</u>	<u>90.7</u>	142	90.5	142	90.8
753.ns3_r	24	171	86.3	<u>170</u>	<u>86.4</u>	170	86.4	24	152	96.6	<u>153</u>	<u>96.4</u>	153	96.3
777.zstd_r	24	411	37.6	<u>411</u>	<u>37.6</u>	411	37.6	24	410	37.7	<u>410</u>	<u>37.7</u>	410	37.7

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
tuned-adm profile was set to balanced using 'tuned-adm profile balanced'

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

tcmalloc, a fast, multithreaded malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from github.com/gperftools/gperftools

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Enabled

Workload Profile set to Custom

Power Regulator set to Dynamic Power Savings Mode

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Tue Jul 14 06:00:33 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srv
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -srvm
```

```
Linux 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501) x86_64
```

```
2. w
```

```
06:00:33 up 1 min,  4 users,  load average: 0.44, 0.32, 0.13
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
3. Username
```

```
From environment variable $USER:  root
```

```
4. ulimit -a
```

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 256682
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 256682
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
```

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
bash -c cd $SPEC/ && $SPEC/intrate-avx2.sh
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 24 -c
ic2026.0-core-avx2-cpu2026-1.0.1-rate-20260429_revB.cfg --iterations=3 --define smt-on --define cores=12
--define physicalfirst --define no-numa --tune base,peak -o all --define drop_caches intrate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 24 --configfile
ic2026.0-core-avx2-cpu2026-1.0.1-rate-20260429_revB.cfg --iterations 3 --define smt-on --define cores=12
--define physicalfirst --define no-numa --tune base,peak --output_format all --define drop_caches
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6377P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 183
stepping        : 1
microcode       : 0x137
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 12
siblings        : 24
1 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-11
physical id 0: apicids 0-23
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	24
On-line CPU(s) list:	0-23
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) 6377P
CPU family:	6
Model:	183
Thread(s) per core:	2
Core(s) per socket:	12
Socket(s):	1

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

Stepping:	1
CPU(s) scaling MHz:	14%
CPU max MHz:	5700.0000
CPU min MHz:	800.0000
BogoMIPS:	6220.80
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect user_shstk avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp hwp_pkg_req hfi vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr ibt flush_lld arch_capabilities
Virtualization:	VT-x
L1d cache:	576 KiB (12 instances)
L1i cache:	384 KiB (12 instances)
L2 cache:	24 MiB (12 instances)
L3 cache:	36 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-23
Vulnerability Gather data sampling:	Not affected
Vulnerability Indirect target selection:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME ONE-SIZE ALL-SIZE WAYS TYPE

LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

L1d	48K	576K	12 Data	1	64	1	64
L1i	32K	384K	8 Instruction	1	64	1	64
L2	2M	24M	16 Unified	2	2048	1	64
L3	36M	36M	12 Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-23

node 0 size: 64200 MB

node 0 free: 63434 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 65740900 kB

10. who -r

run-level 3 Jul 14 05:59

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant

enabled-runtime systemd-remount-fs

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
hwloc-dump-hwdata ipmi ipmievdl issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd-generate_opts smb snmpd
snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@ wpa_supplicant@

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

indirect pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default

root=UUID=16b66c39-3265-46a8-be7f-7591e5d8731a

splash=silent

mitigations=auto

quiet

security=apparmor

14. cpupower frequency-info

analyzing CPU 2:

current policy: frequency should be within 800 MHz and 5.70 GHz.

The governor "powersave" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

Current active profile: balanced

16. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage

defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

20. Disk information

SPEC is set to: /home/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	931G	247G	682G	27%	/home

21. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant MicroServer Gen11
Product Family: ProLiant
Serial: JRT31JQXTD

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Hynix HMC88AGBEA084N 32 GB 2 rank 5600, configured at 4400

23. BIOS

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.50
BIOS Date: 06/25/2026
BIOS Revision: 2.50
Firmware Revision: 1.62

Compiler Version Notes

```
=====
C      | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base,
      | peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

```
=====
C++    | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)
      | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base,
      | peak) 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base,
      | peak) 750.sealcrypto_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xCORE-AVX2 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xCORE-AVX2 -O3 -ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xCORE-AVX2 -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

Peak Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2)

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Peak Optimization Flags (Continued)

C benchmarks (continued):

-xCORE-AVX2 -ffp-model=fast -flto -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

C++ benchmarks:

706.stockfish_r: -m64 -std=c++17 -Wl, -z, muldefs
-Wl, -plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2
-ffp-model=fast -flto -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: Same as 706.stockfish_r

Benchmarks using both C and C++:

710.omnetpp_r: -m64 -std=c++17 -std=c18 -Wl, -z, muldefs
-Wl, -plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2
-ffp-model=fast -flto -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

721.gcc_r: -m64 -std=c++17 -std=c18 -Wl, -z, muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2
-ffp-model=fast -flto -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

723.llvm_r: Same as 721.gcc_r

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: Same as 710.omnetpp_r

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.10 GHz, Intel Xeon 6377P)

SPECrate®2026_int_base = 57.0

SPECrate®2026_int_peak = 59.9

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Sep-2026

Software Availability: Apr-2026

Peak Optimization Flags (Continued)

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-CatlowRefresh-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-CatlowRefresh-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-13 20:30:32-0400.

Report generated on 2026-09-08 18:11:25 by CPU2026 PDF formatter (unknown).

Originally published on 2026-09-08.