# SPEC CPU®2026 Floating Point Rate Result



## Maginfra Co., Ltd.
## QR8228-D3 (AMD EPYC 9645)

SPECrate®2026_fp_base = 837

SPECrate®2026_fp_peak = 894

**CPU2026 License:** 9087
**Test Sponsor:** Maginfra Co., Ltd.
**Tested by:** Maginfra Co., Ltd.

**Test Date:** Jul-2026
**Hardware Availability:** Dec-2025
**Software Availability:** Jan-2026

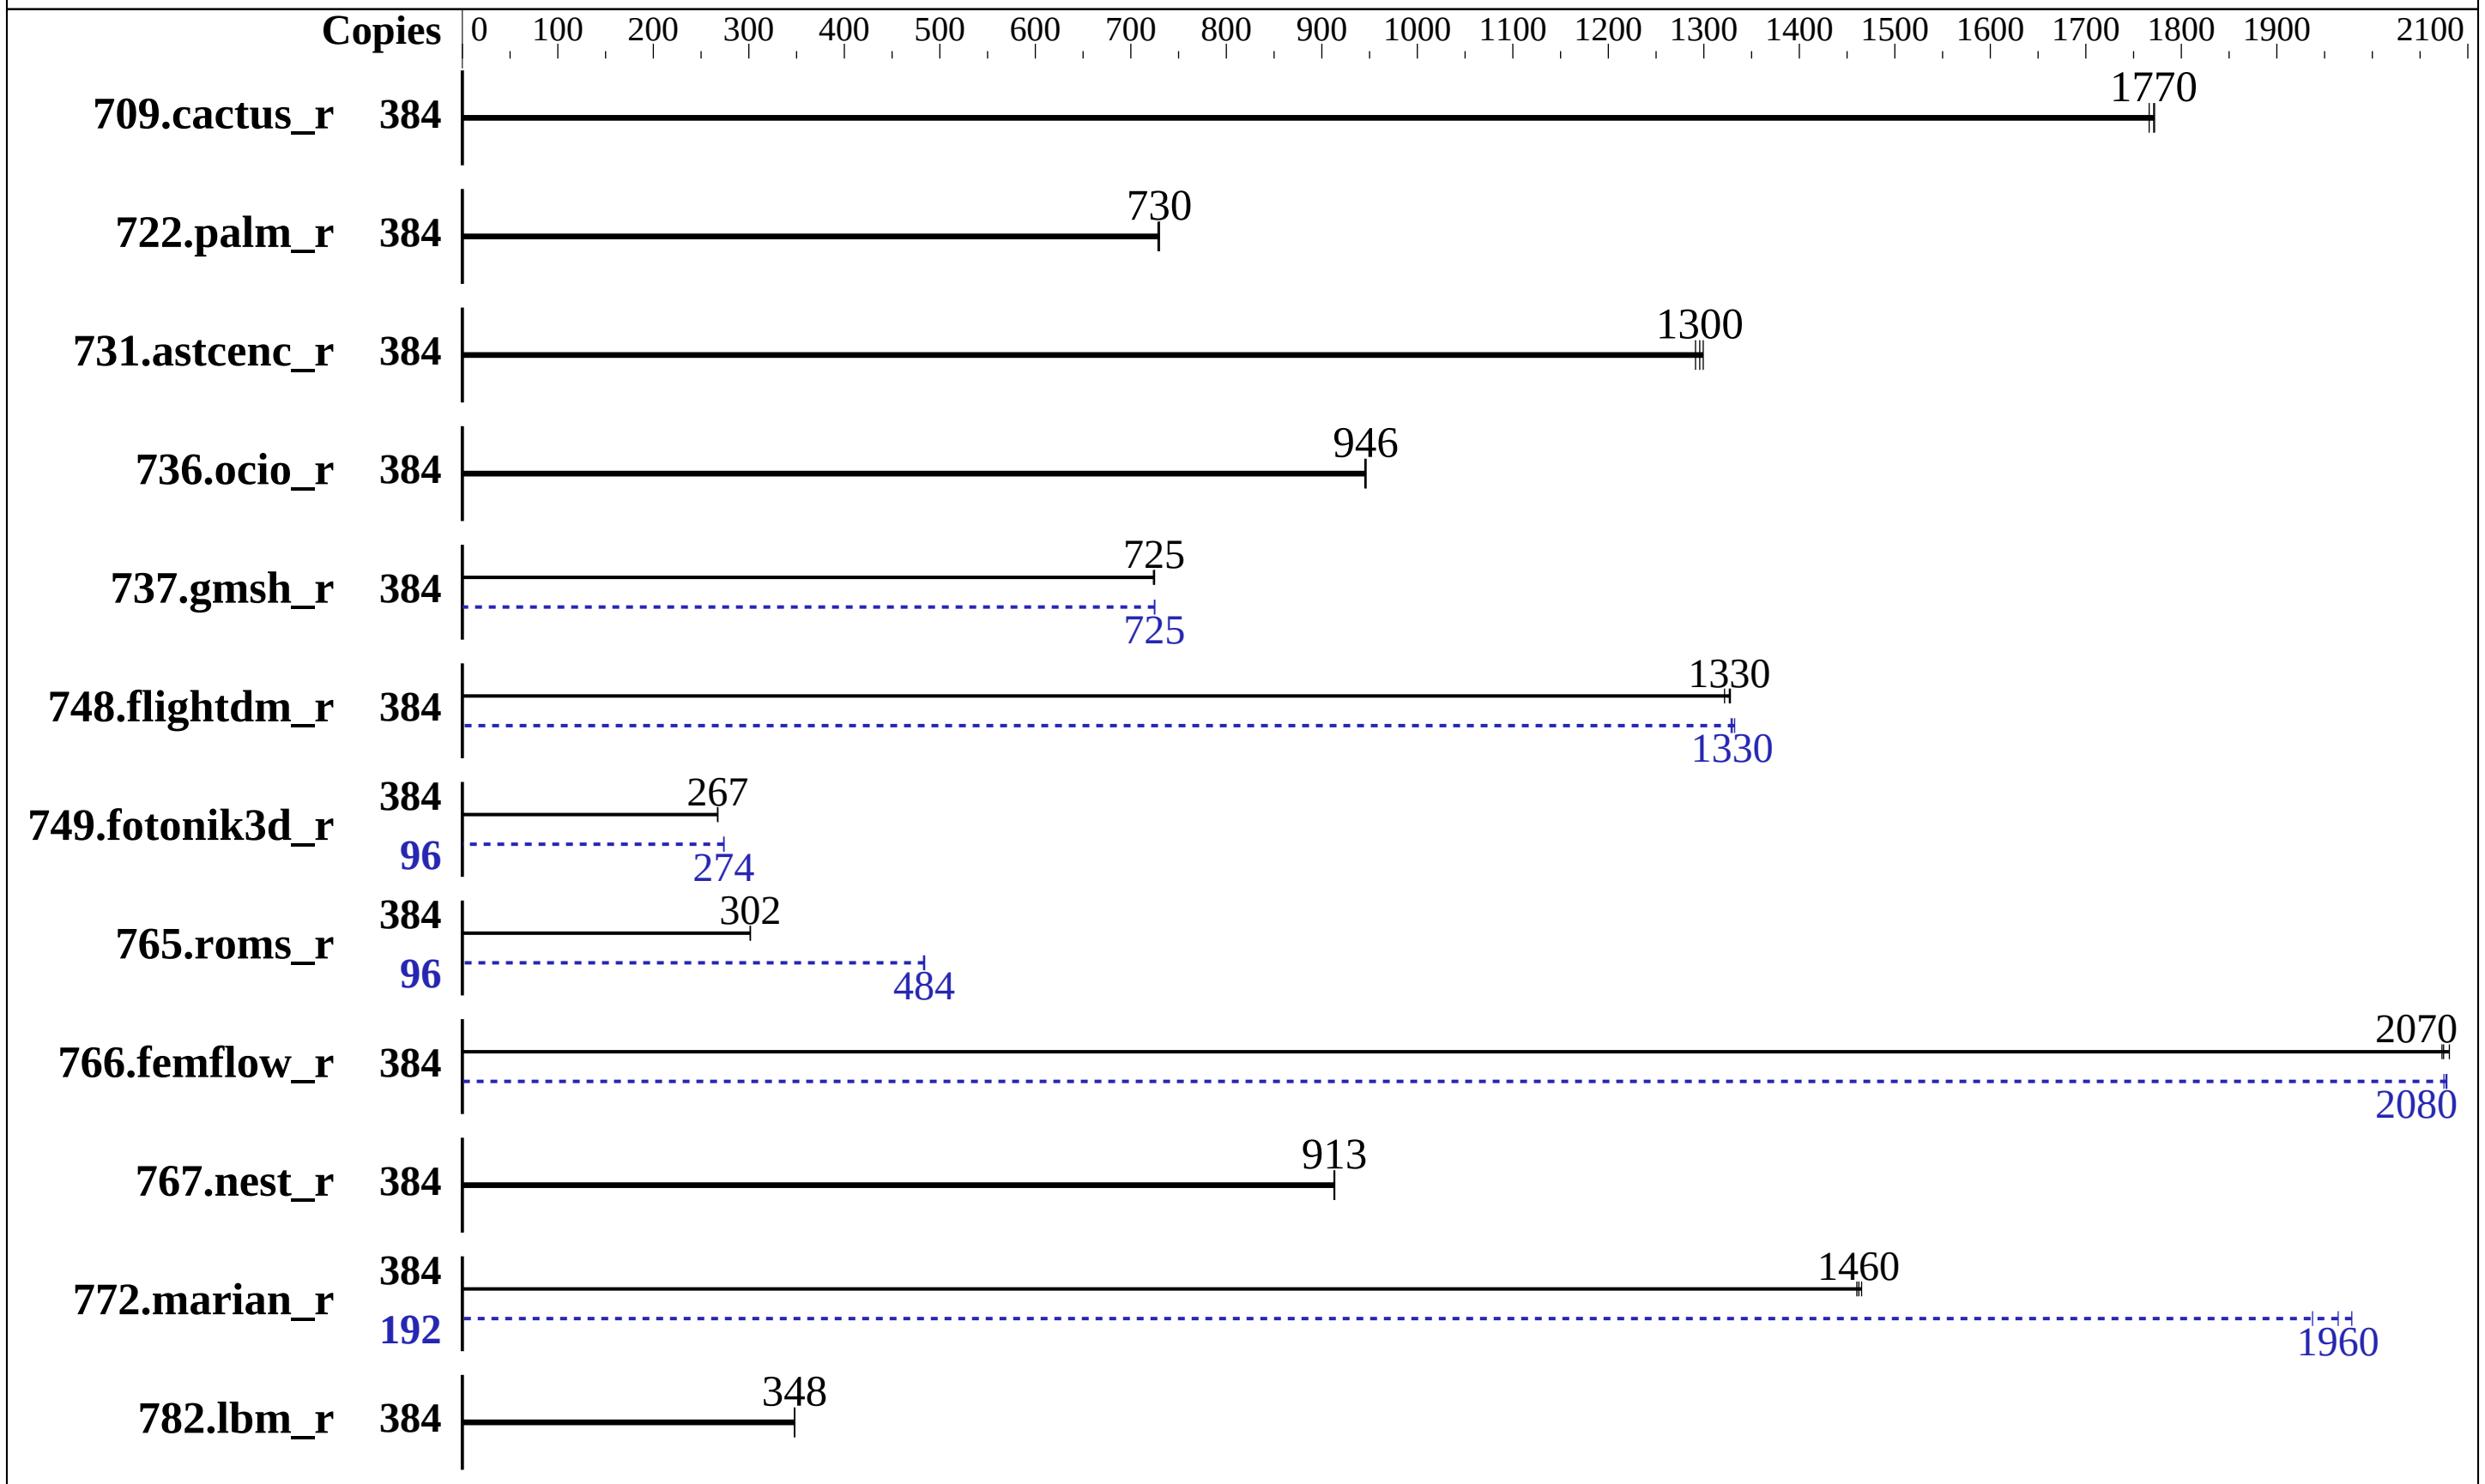


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 9645 |
| Max MHz: | 3700 |
| Nominal: | 2300 |
| Enabled: | 192 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 12 cores |
| Other: | None |
| Memory: | 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R) |
| Storage: | 1 x 4 TB NVME SSD |
| Cooling: | Air |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default |
| Compiler: | C/C++/Fortran: Version 5.1.0 of AOCC |
| Compiler Category: | Vendor |
| Firmware: | Version 01.14.00 released Dec-2025 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9645)

SPECrate®2026_fp_base = 837
SPECrate®2026_fp_peak = 894

| | | | |
|---|---|---|---|
| **CPU2026 License:** | 9087 | **Test Date:** | Jul-2026 |
| **Test Sponsor:** | Maginfra Co., Ltd. | **Hardware Availability:** | Dec-2025 |
| **Tested by:** | Maginfra Co., Ltd. | **Software Availability:** | Jan-2026 |

# Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 709.cactus_r | 384 | 187 | 1770 | 186 | 1770 | **186** | **1770** | 384 | 187 | 1770 | 186 | 1770 | **186** | **1770** |
| 722.palm_r | 384 | **695** | **730** | 696 | 728 | 694 | 730 | 384 | **695** | **730** | 696 | 728 | 694 | 730 |
| 731.astcenc_r | 384 | **249** | **1300** | 248 | 1300 | 250 | 1290 | 384 | **249** | **1300** | 248 | 1300 | 250 | 1290 |
| 736.ocio_r | 384 | **355** | **946** | 356 | 945 | 355 | 946 | 384 | **355** | **946** | 356 | 945 | 355 | 946 |
| 737.gmsh_r | 384 | 243 | 725 | **243** | **725** | 244 | 724 | 384 | 243 | 725 | **243** | **725** | 243 | 725 |
| 748.flightdm_r | 384 | 207 | 1330 | **207** | **1330** | 208 | 1320 | 384 | 207 | 1330 | 206 | 1330 | **207** | **1330** |
| 749.fotonik3d_r | 384 | 1659 | 268 | **1660** | **267** | 1661 | 267 | 96 | 405 | 274 | **405** | **274** | 405 | 274 |
| 765.roms_r | 384 | **2006** | **302** | 2006 | 302 | 2005 | 302 | 96 | 312 | 484 | **313** | **484** | 313 | 483 |
| 766.femflow_r | 384 | 272 | 2070 | 271 | 2080 | **272** | **2070** | 384 | 271 | 2070 | 271 | 2080 | **271** | **2080** |
| 767.nest_r | 384 | 334 | 913 | **333** | **913** | 333 | 914 | 384 | 334 | 913 | **333** | **913** | 333 | 914 |
| 772.marian_r | 384 | 415 | 1460 | 414 | 1470 | **415** | **1460** | 192 | 156 | 1940 | 153 | 1980 | **154** | **1960** |
| 782.lbm_r | 384 | **633** | **348** | 633 | 348 | 632 | 348 | 384 | **633** | **348** | 633 | 348 | 632 | 348 |

**SPECrate®2026_fp_base = 837**
**SPECrate®2026_fp_peak = 894**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

# Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

# Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

# Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
```

(Continued on next page)

## Operating System Notes (Continued)

```
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2026/amd_rate_aocc510_znver5_B_lib/lib:/home/CPU2026/amd_rate_
     aocc510_znver5_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04
```

## Platform Notes

```
 BIOS configuration:
 NUMA nodes per socket = NPS4
 Determinism Slider = Power
 cTDP Control = Manual
 cTDP = 500
 Package Power Limit Control = Manual
 Package Power Limit  = 500

 Sysinfo program /home/CPU2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Wed Aug 19 01:25:58 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
```


**(Continued on next page)**

## Platform Notes (Continued)

```
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
2. w
   01:25:58 up  6:34,  1 user,  load average: 121.10, 300.89, 345.14
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                18:53    6:31m 20.07s 18.94s python3 ./run_amd_rate_aocc510_znver5_B1.py

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6189673
  max locked memory       (kbytes, -l) 2048
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
```

(Continued on next page)

## Platform Notes (Continued)

```
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6189673
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 python3 ./run_amd_rate_aocc510_znver5_B1.py
 runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.057/templogs/preenv.fprate.057.0.log --lognum 057.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9645 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101054
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 192 4K pages
    cpu cores       : 96
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
    physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
    physical id 0: apicids 0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247
    physical id 1: apicids 256-279,288-311,320-343,352-375,384-407,416-439,448-471,480-503
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                      x86_64
  CPU op-mode(s):                    32-bit, 64-bit
  Address sizes:                     52 bits physical, 57 bits virtual
```

(Continued on next page)

## Platform Notes (Continued)

```
Byte Order:                    Little Endian
CPU(s):                        384
On-line CPU(s) list:           0-383
Vendor ID:                     AuthenticAMD
Model name:                    AMD EPYC 9645 96-Core Processor
CPU family:                    26
Model:                         17
Thread(s) per core:            2
Core(s) per socket:            96
Socket(s):                     2
Stepping:                      0
Frequency boost:               enabled
CPU(s) scaling MHz:            100%
CPU max MHz:                   2300.0000
CPU min MHz:                   1500.0000
BogoMIPS:                      4593.19
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                               rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                               extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                               sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                               cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                               osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                               perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                               ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                               smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                               avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                               xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                               cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                               xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                               svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                               pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                               vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                               avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                               movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                               flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
                               amd_lbr_pmc_freeze
Virtualization:                AMD-V
L1d cache:                     9 MiB (192 instances)
L1i cache:                     6 MiB (192 instances)
L2 cache:                      192 MiB (192 instances)
L3 cache:                      512 MiB (16 instances)
NUMA node(s):                  8
NUMA node0 CPU(s):             0-23,192-215
NUMA node1 CPU(s):             24-47,216-239
NUMA node2 CPU(s):             48-71,240-263
NUMA node3 CPU(s):             72-95,264-287
```

(Continued on next page)

## Platform Notes (Continued)

```
  NUMA node4 CPU(s):                      96-119,288-311
  NUMA node5 CPU(s):                      120-143,312-335
  NUMA node6 CPU(s):                      144-167,336-359
  NUMA node7 CPU(s):                      168-191,360-383
  Vulnerability Gather data sampling:     Not affected
  Vulnerability Itlb multihit:            Not affected
  Vulnerability L1tf:                     Not affected
  Vulnerability Mds:                      Not affected
  Vulnerability Meltdown:                 Not affected
  Vulnerability Mmio stale data:          Not affected
  Vulnerability Reg file data sampling:   Not affected
  Vulnerability Retbleed:                 Not affected
  Vulnerability Spec rstack overflow:     Mitigation; IBPB on VMEXIT only
  Vulnerability Spec store bypass:        Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:               Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                          always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                    Not affected
  Vulnerability Tsx async abort:          Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M   16 Unified         2  1024        1             64
     L3        32M     512M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-23,192-215
  node 0 size: 192979 MB
  node 0 free: 191587 MB
  node 1 cpus: 24-47,216-239
  node 1 size: 193523 MB
  node 1 free: 192259 MB
  node 2 cpus: 48-71,240-263
  node 2 size: 193523 MB
  node 2 free: 192227 MB
  node 3 cpus: 72-95,264-287
  node 3 size: 193523 MB
  node 3 free: 192231 MB
  node 4 cpus: 96-119,288-311
  node 4 size: 193523 MB
  node 4 free: 192223 MB
  node 5 cpus: 120-143,312-335
```

(Continued on next page)

## Platform Notes (Continued)

```
    node 5 size: 193484 MB
    node 5 free: 192174 MB
    node 6 cpus: 144-167,336-359
    node 6 size: 193523 MB
    node 6 free: 192210 MB
    node 7 cpus: 168-191,360-383
    node 7 size: 193365 MB
    node 7 free: 192070 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  12  12  12  32  32  32  32
      1:  12  10  12  12  32  32  32  32
      2:  12  12  10  12  32  32  32  32
      3:  12  12  12  10  32  32  32  32
      4:  32  32  32  32  10  12  12  12
      5:  32  32  32  32  12  10  12  12
      6:  32  32  32  32  12  12  10  12
      7:  32  32  32  32  12  12  12  10

  ------------------------------------------------------------
  9. /proc/meminfo
     MemTotal:       1584584252 kB

  ------------------------------------------------------------
  10. who -r
    run-level 3 Aug 18 18:51

  ------------------------------------------------------------
  11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
    Default Target  Status
    multi-user      degraded

  ------------------------------------------------------------
  12. Failed units, from systemctl list-units --state=failed
      UNIT              LOAD   ACTIVE SUB    DESCRIPTION
    * logrotate.service loaded failed failed Rotate log files

  ------------------------------------------------------------
  13. Services, from systemctl list-unit-files
    STATE            UNIT FILES
    enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                     issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                     nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
    enabled-runtime  systemd-remount-fs
    disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                     chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                     firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                  kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                  serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
                  systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                  systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
                 wickedd-dhcp6 wickedd-nanny
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=b599d87c-474e-4c72-b781-36d0bcedf18d
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 355:
    current policy: frequency should be within 1.50 GHz and 2.30 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
```

(Continued on next page)

## Platform Notes (Continued)

```
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/CPU2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 xfs   929G   74G  855G   8% /

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Maginfra
    Product:        QR8228-D3
    Product Family: Not specified
    Serial:         00000000

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
```

(Continued on next page)

## Platform Notes (Continued)

```
  Memory:
    12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
    11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
    1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      01.14.00
    BIOS Date:         12/25/2025
```

## Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
        | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
        | 767.nest_r(base, peak) 772.marian_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
```

(Continued on next page)

## Compiler Version Notes (Continued)

```
        | peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

# Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both C and C++:
`clang++ clang`

# Base Portability Flags

736.ocio_r: `-fno-finite-math-only`
737.gmsh_r: `-fno-fast-math`
748.flightdm_r: `-fno-reciprocal-math`
767.nest_r: `-fno-finite-math-only`

# Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

(Continued on next page)

## Base Optimization Flags (Continued)

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both C and C++:
clang++ clang

# Peak Portability Flags

736.ocio_r: `-fno-finite-math-only`
737.gmsh_r: `-fno-fast-math`
748.flightdm_r: `-fno-reciprocal-math`
767.nest_r: `-fno-finite-math-only`

# Peak Optimization Flags

C benchmarks:

782.lbm_r: `basepeak = yes`

C++ benchmarks:

731.astcenc_r: `basepeak = yes`

736.ocio_r: `basepeak = yes`

748.flightdm_r: `-m64 -std=c++17`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false`
`-Wl,-mllvm -Wl,-extra-inliner -ffast-math -O3`
`-march=znver5 -fveclib=AMDLIBM -flto`
`-mllvm -unroll-threshold=100`
`-mllvm -loop-unswitch-threshold=200000`
`-mllvm -reduce-array-computations=3 -zopt -lamdlibm`
`-lamdalloc -lflang`

766.femflow_r: `Same as 748.flightdm_r`

767.nest_r: `basepeak = yes`

772.marian_r: `Same as 748.flightdm_r`

Fortran benchmarks:

722.palm_r: `basepeak = yes`

749.fotonik3d_r: `-m64 -Mstandard`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math`
`-Ofast -march=znver5 -fveclib=AMDLIBM -flto -Mrecursive`
`-mllvm -reduce-array-computations=3`
`-fepilog-vectorization-of-inductions -zopt -lamdlibm`

**(Continued on next page)**

# Peak Optimization Flags (Continued)

749.fotonik3d_r (continued):
-lamdalloc -lflang

765.roms_r: Same as 749.fotonik3d_r

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

737.gmsh_r: -m64 -std=c++17 -std=c18
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-fstrip-mining -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -lflang

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml
http://www.spec.org/cpu2026/results/flags/Maginfra-Platform-Settings-amd-V1.1.xml



For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-08-19 01:25:58-0400.
Report generated on 2026-09-23 13:08:12 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-09-22.