SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_int_base = 786

SPECrate®2026_int_peak = 827

CPU2026 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

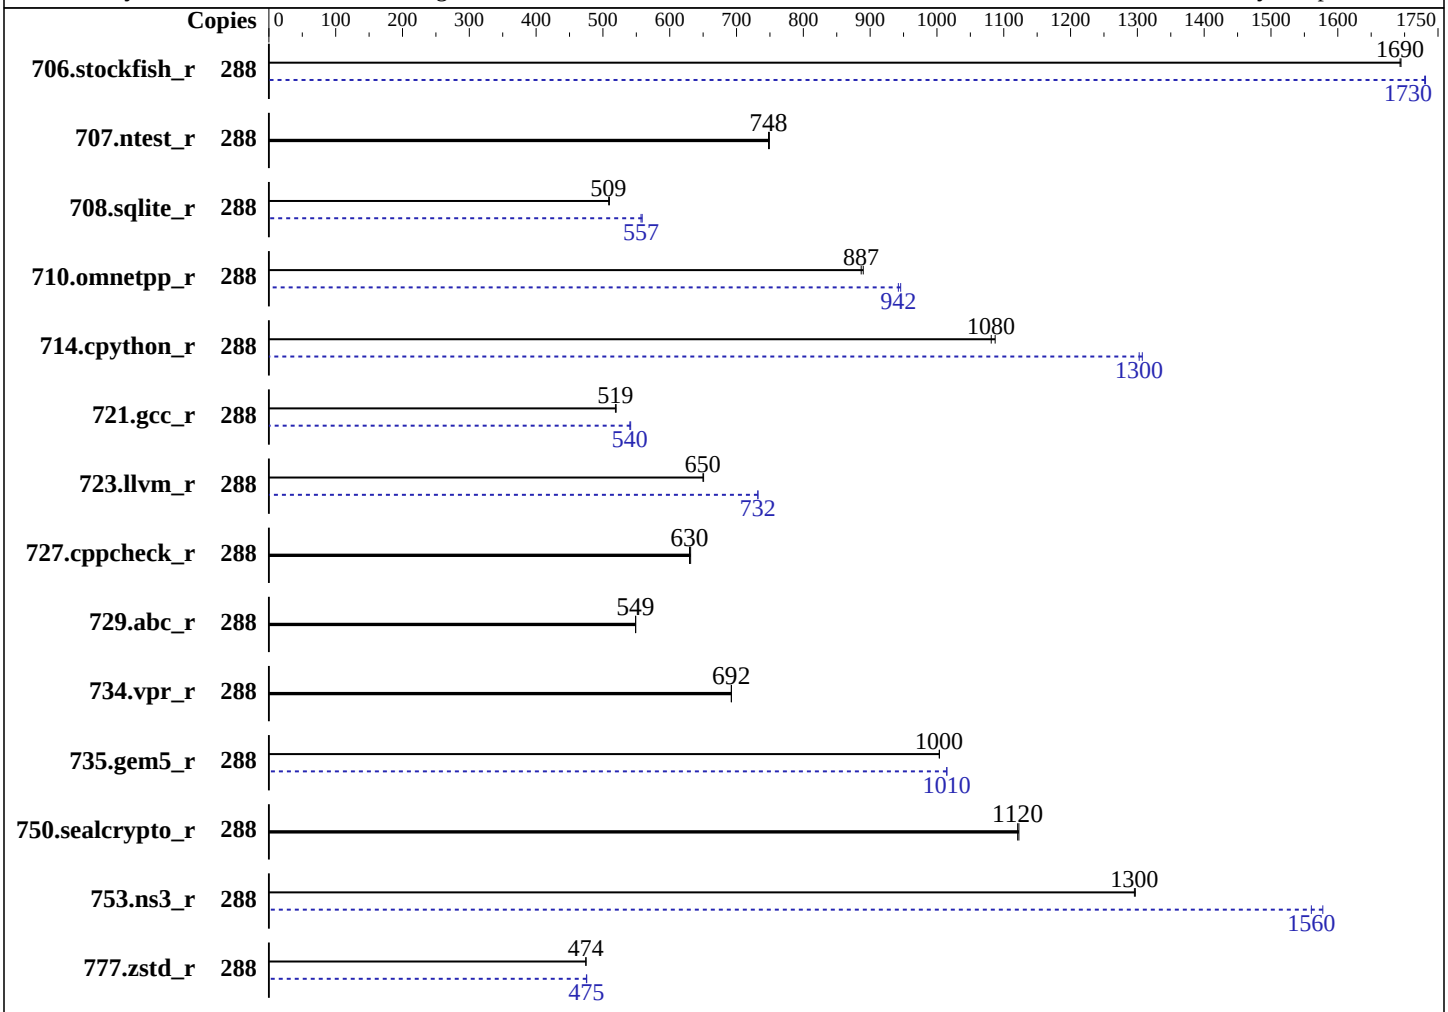

Hardware

CPU Name:	Intel Xeon 6960E+
Max MHz:	3200
Nominal:	2400
Enabled:	288 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	144 MB I+D on chip per chip, 4 MB shared / 4 cores
L3:	432 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-8000B-R)
Storage:	1 x 3.84 TB NVME SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 kernel 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Version 7.10.25P94 released May-2026 BIOS
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	tcmalloc memory allocator v2.18.1

(Continued on next page)

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G7 (Intel Xeon 6960E+)

SPECrate®2026_int_base = 786

SPECrate®2026_int_peak = 827

CPU2026 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Software (Continued)

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	288	**214**	**1690**	214	1690			288	210	1730	**210**	**1730**		
707.ntest_r	288	**228**	**748**	228	749			288	**228**	**748**	228	749		
708.sqlite_r	288	**299**	**509**	298	510			288	272	559	**273**	**557**		
710.omnetpp_r	288	**158**	**887**	157	890			288	148	946	**149**	**942**		
714.cpython_r	288	127	1090	**128**	**1080**			288	**106**	**1300**	106	1310		
721.gcc_r	288	**381**	**519**	380	520			288	**366**	**540**	365	542		
723.llvm_r	288	**225**	**650**	224	651			288	199	732	**199**	**732**		
727.cppcheck_r	288	164	631	**164**	**630**			288	164	631	**164**	**630**		
729.abc_r	288	**241**	**549**	241	549			288	**241**	**549**	241	549		
734.vpr_r	288	**192**	**692**	192	692			288	**192**	**692**	192	692		
735.gem5_r	288	**140**	**1000**	140	1000			288	**138**	**1010**	138	1010		
750.sealcrypto_r	288	**138**	**1120**	138	1120			288	**138**	**1120**	138	1120		
753.ns3_r	288	**136**	**1300**	136	1300			288	**113**	**1560**	112	1580		
777.zstd_r	288	391	475	**391**	**474**			288	390	476	**390**	**475**		

SPECrate®2026_int_base = 786

SPECrate®2026_int_peak = 827

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2026/lib"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using CentOS Stream 9.
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 tcmalloc, a fast, multithreaded malloc implementation
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0
 sources available from github.com/gperftools/gperftools
```

Platform Notes

```
BIOS Settings:
 SNC = Enable
 ACPI C6x Enumeration =  C6 as ACPI C2
 Latency Optimized Mode =  Enabled
BMC Settings:
 Fan mode = powerful mode

 Sysinfo program /home/spec2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Sat Sep  5 01:38:13 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
```

(Continued on next page)

Platform Notes (Continued)

```
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/lp) x86_64

------------------------------------------------------------
2. w
   01:38:13 up 7 min,  1 user,  load average: 0.05, 0.45, 0.34
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                01:36   13.00s  1.85s  0.02s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6190122
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6190122
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 -c
   ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define cores=288 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
    intrate
 runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 --configfile
   ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define cores=288 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   --output_format all --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2026.018/templogs/preenv.intrate.018.0.log --lognum 018.0
    --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6960E+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 221
    stepping        : 1
    microcode       : 0x11000120
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 144
    siblings        : 144
    2 physical ids (chips)
    288 processors (hardware threads)
    physical id 0: core ids 0-47,128-175,256-303
    physical id 1: core ids 0-47,128-175,256-303
    physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
   ,74,76,78,80,82,84,86,88,90,92,94,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290
   ,292,294,296,298,300,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,
   344,346,348,350,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,5
   56,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606
    physical id 1: apicids
   1024,1026,1028,1030,1032,1034,1036,1038,1040,1042,1044,1046,1048,1050,1052,1054,1056,1058,1060,1062,1064,
   1066,1068,1070,1072,1074,1076,1078,1080,1082,1084,1086,1088,1090,1092,1094,1096,1098,1100,1102,1104,1106,
   1108,1110,1112,1114,1116,1118,1280,1282,1284,1286,1288,1290,1292,1294,1296,1298,1300,1302,1304,1306,1308,
   1310,1312,1314,1316,1318,1320,1322,1324,1326,1328,1330,1332,1334,1336,1338,1340,1342,1344,1346,1348,1350,
   1352,1354,1356,1358,1360,1362,1364,1366,1368,1370,1372,1374,1536,1538,1540,1542,1544,1546,1548,1550,1552,
```

(Continued on next page)

Platform Notes (Continued)

```
    1554,1556,1558,1560,1562,1564,1566,1568,1570,1572,1574,1576,1578,1580,1582,1584,1586,1588,1590,1592,1594,
     1596,1598,1600,1602,1604,1606,1608,1610,1612,1614,1616,1618,1620,1622,1624,1626,1628,1630
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.40.4:
   Architecture:                            x86_64
   CPU op-mode(s):                          32-bit, 64-bit
   Address sizes:                           52 bits physical, 48 bits virtual
   Byte Order:                              Little Endian
   CPU(s):                                  288
   On-line CPU(s) list:                     0-287
   Vendor ID:                               GenuineIntel
   Model name:                              Intel(R) Xeon(R) 6960E+
   CPU family:                              6
   Model:                                   221
   Thread(s) per core:                      1
   Core(s) per socket:                      144
   Socket(s):                               2
   Stepping:                                1
   CPU(s) scaling MHz:                      29%
   CPU max MHz:                             3200.0000
   CPU min MHz:                             800.0000
   BogoMIPS:                                4800.00
   Flags:                                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                            pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                            pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
                                            xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                            dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                            pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                            xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                            cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                            ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                                            tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
                                            clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                                            cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                            user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts hwp
                                            hwp_act_window hwp_epp hwp_pkg_req vnmi umip pku ospke waitpkg gfni
                                            vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b
                                            enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d
                                            arch_capabilities
   Virtualization:                          VT-x
   L1d cache:                               9 MiB (288 instances)
   L1i cache:                               18 MiB (288 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L2 cache:                              288 MiB (72 instances)
  L3 cache:                              864 MiB (2 instances)
  NUMA node(s):                          6
  NUMA node0 CPU(s):                     0-47
  NUMA node1 CPU(s):                     48-95
  NUMA node2 CPU(s):                     96-143
  NUMA node3 CPU(s):                     144-191
  NUMA node4 CPU(s):                     192-239
  NUMA node5 CPU(s):                     240-287
  Vulnerability Gather data sampling:    Not affected
  Vulnerability Itlb multihit:           Not affected
  Vulnerability L1tf:                    Not affected
  Vulnerability Mds:                     Not affected
  Vulnerability Meltdown:                Not affected
  Vulnerability Mmio stale data:         Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:                Not affected
  Vulnerability Spec rstack overflow:    Not affected
  Vulnerability Spec store bypass:       Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:              Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                         PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                   Not affected
  Vulnerability Tsx async abort:         Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       9M    8 Data            1     64        1             64
     L1i       64K      18M    8 Instruction     1    128        1             64
     L2         4M     288M   16 Unified         2   4096        1             64
     L3       432M     864M   16 Unified         3 442368        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus: 0-47
  node 0 size: 257502 MB
  node 0 free: 256443 MB
  node 1 cpus: 48-95
  node 1 size: 257996 MB
  node 1 free: 257327 MB
  node 2 cpus: 96-143
  node 2 size: 258035 MB
  node 2 free: 257370 MB
  node 3 cpus: 144-191
  node 3 size: 258035 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 free: 257461 MB
  node 4 cpus: 192-239
  node 4 size: 258035 MB
  node 4 free: 257327 MB
  node 5 cpus: 240-287
  node 5 size: 257956 MB
  node 5 free: 257382 MB
  node distances:
  node   0   1   2   3   4   5
    0:  10  15  17  21  28  26
    1:  15  10  15  23  26  23
    2:  17  15  10  26  23  21
    3:  21  28  26  10  15  17
    4:  23  26  23  15  10  15
    5:  26  23  21  17  15  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584702144 kB

------------------------------------------------------------
10. who -r
  run-level 3 Sep 5 01:32

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth chronyd cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                   lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                   rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                       wickedd-nanny wpa_supplicant
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                     autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                   chrony-wait console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebtables
                    exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged ipmi
```

(Continued on next page)

Platform Notes (Continued)

```
                 ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs
                nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd
                  rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                    speech-dispatcherd systemd-boot-check-no-failures systemd-confext
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                    update-system-flatpaks upower vncserver@ wpa_supplicant@
  indirect          pcscd saned@ systemd-userdbd wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=0ae3eb24-ab4b-4b8e-874e-74e44871a98f
  splash=silent
  resume=/dev/disk/by-uuid/ee1f2cac-1352-4dc9-8ca2-e927f2abe04e
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 3:
    current policy: frequency should be within 800 MHz and 3.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/spec2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   3.0T  670G  2.4T  23% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         H3C
    Product:        R4900 G7 AP
    Product Family: Rack
    Serial:         210235A5QEH202606251

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Hynix HMCG94CMBRA772N 64 GB 2 rank 8000
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      7.10.25P94
    BIOS Date:         05/28/2026
    BIOS Revision:     5.35
    Firmware Revision: 3.1
```

Compiler Version Notes

```
==============================================================================
C      | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base,
       | peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)
       | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base,
       | peak) 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base,
       | peak) 750.sealcrypto_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Peak Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2)
-xCORE-AVX2(pass 1) -ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-fno-strict-aliasing -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

C++ benchmarks:

706.stockfish_r: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: Same as 706.stockfish_r

Benchmarks using both C and C++:

710.omnetpp_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-fno-strict-aliasing -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

721.gcc_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-fno-strict-aliasing -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

723.llvm_r: Same as 721.gcc_r

(Continued on next page)

Peak Optimization Flags (Continued)

729.abc_r: `basepeak = yes`

734.vpr_r: `basepeak = yes`

735.gem5_r: `Same as 710.omnetpp_r`

750.sealcrypto_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html`
`http://www.spec.org/cpu2026/results/flags/New_H3C-Platform-Settings-Intel-CWF-RevA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml`
`http://www.spec.org/cpu2026/results/flags/New_H3C-Platform-Settings-Intel-CWF-RevA.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-09-04 13:38:12-0400.
Report generated on 2026-09-23 13:08:34 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-09-22.