SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G7 (Intel Xeon 6980E+)

SPECrate®2026_fp_base = 1030

SPECrate®2026_fp_peak = 1050

CPU2026 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

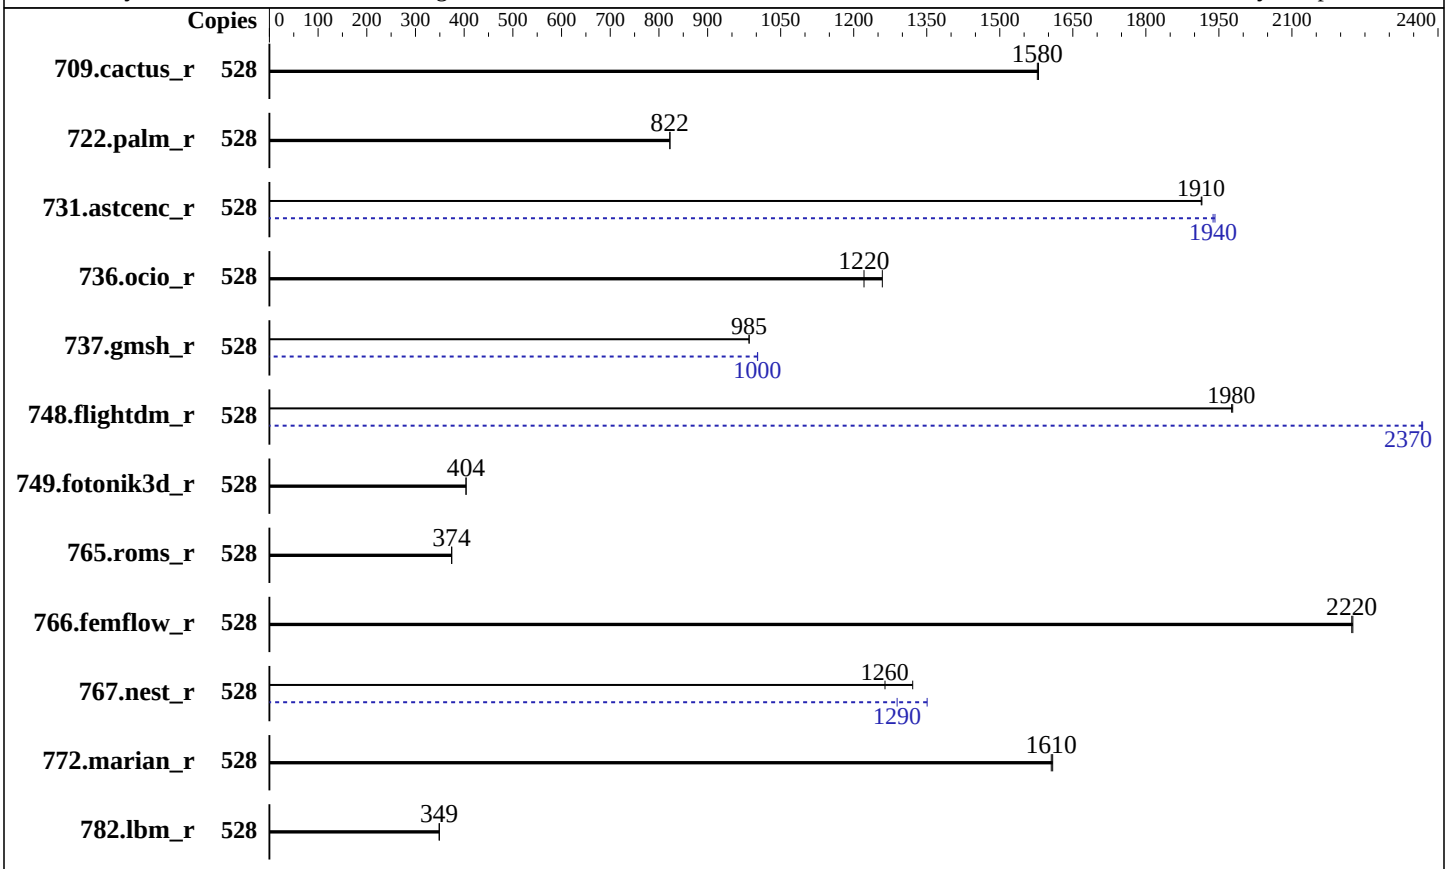

Hardware

CPU Name:	Intel Xeon 6980E+
Max MHz:	3200
Nominal:	2100
Enabled:	528 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	264 MB I+D on chip per chip, 4 MB shared / 4 cores
L3:	528 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-8000B-R)
Storage:	1 x 3.84 TB NVME SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 kernel 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Version 7.10.25P94 released May-2026 BIOS
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	tcmalloc memory allocator v2.18.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G7 (Intel Xeon 6980E+)

SPECrate®2026_fp_base = 1030

SPECrate®2026_fp_peak = 1050

CPU2026 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	528	**287**	**1580**	287	1580			528	**287**	**1580**	287	1580		
722.palm_r	528	847	823	**848**	**822**			528	847	823	**848**	**822**		
731.astcenc_r	528	232	1920	**232**	**1910**			528	**229**	**1940**	228	1940		
736.ocio_r	528	367	1260	**378**	**1220**			528	367	1260	**378**	**1220**		
737.gmsh_r	528	**246**	**985**	246	985			528	**242**	**1000**	242	1000		
748.flightdm_r	528	**191**	**1980**	191	1980			528	**160**	**2370**	160	2370		
749.fotonik3d_r	528	1511	404	**1511**	**404**			528	1511	404	**1511**	**404**		
765.roms_r	528	**2222**	**374**	2221	374			528	**2222**	**374**	2221	374		
766.femflow_r	528	**348**	**2220**	348	2230			528	**348**	**2220**	348	2230		
767.nest_r	528	**331**	**1260**	317	1320			528	310	1350	**325**	**1290**		
772.marian_r	528	**519**	**1610**	518	1610			528	**519**	**1610**	518	1610		
782.lbm_r	528	**868**	**349**	867	349			528	**868**	**349**	867	349		

SPECrate®2026_fp_base = 1030

SPECrate®2026_fp_peak = 1050

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2026/lib"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 tcmalloc, a fast, multithreaded malloc implementation
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0
 sources available from github.com/gperftools/gperftools
```

Platform Notes

```
BIOS Settings:
 SNC = Enable
 ACPI C6x Enumeration =  C6 as ACPI C2
 Latency Optimized Mode =  Enabled
BMC Settings:
 Fan mode = powerful mode

 Sysinfo program /home/spec2026/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Wed Aug 26 22:11:43 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/lp) x86_64

------------------------------------------------------------
2. w
   22:11:43 up  7:27,  4 users,  load average: 151.50, 399.67, 457.50
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                17:49    4:21m  1.58s  0.02s -bash
  root     pts/0    172.17.74.7      16:33    5:36m  0.19s  0.19s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6189059
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6189059
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
```

(Continued on next page)

Platform Notes (Continued)

```
 -bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 528 -c
  ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define peakfpcopies=264
  --define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   -o all fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 528 --configfile
  ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define peakfpcopies=264
  --define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
   --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2026.017/templogs/preenv.fprate.017.0.log --lognum 017.0
   --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6980E+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 221
    stepping        : 1
    microcode       : 0x11000120
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 264
    siblings        : 264
    2 physical ids (chips)
    528 processors (hardware threads)
    physical id 0: core ids 0-87,128-215,256-343
    physical id 1: core ids 0-87,128-215,256-343
    physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
   ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
   32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,256,258,260,262,26
   4,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316
   ,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368,
   370,372,374,376,378,380,382,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,4
   22,424,426,428,430,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,55
   4,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606
   ,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,
    660,662,664,666,668,670,672,674,676,678,680,682,684,686
    physical id 1: apicids
   1024,1026,1028,1030,1032,1034,1036,1038,1040,1042,1044,1046,1048,1050,1052,1054,1056,1058,1060,1062,1064,
   1066,1068,1070,1072,1074,1076,1078,1080,1082,1084,1086,1088,1090,1092,1094,1096,1098,1100,1102,1104,1106,
   1108,1110,1112,1114,1116,1118,1120,1122,1124,1126,1128,1130,1132,1134,1136,1138,1140,1142,1144,1146,1148,
   1150,1152,1154,1156,1158,1160,1162,1164,1166,1168,1170,1172,1174,1176,1178,1180,1182,1184,1186,1188,1190,
   1192,1194,1196,1198,1280,1282,1284,1286,1288,1290,1292,1294,1296,1298,1300,1302,1304,1306,1308,1310,1312,
   1314,1316,1318,1320,1322,1324,1326,1328,1330,1332,1334,1336,1338,1340,1342,1344,1346,1348,1350,1352,1354,
```

(Continued on next page)

Platform Notes (Continued)

```
    1356,1358,1360,1362,1364,1366,1368,1370,1372,1374,1376,1378,1380,1382,1384,1386,1388,1390,1392,1394,1396,
    1398,1400,1402,1404,1406,1408,1410,1412,1414,1416,1418,1420,1422,1424,1426,1428,1430,1432,1434,1436,1438,
    1440,1442,1444,1446,1448,1450,1452,1454,1536,1538,1540,1542,1544,1546,1548,1550,1552,1554,1556,1558,1560,
    1562,1564,1566,1568,1570,1572,1574,1576,1578,1580,1582,1584,1586,1588,1590,1592,1594,1596,1598,1600,1602,
    1604,1606,1608,1610,1612,1614,1616,1618,1620,1622,1624,1626,1628,1630,1632,1634,1636,1638,1640,1642,1644,
    1646,1648,1650,1652,1654,1656,1658,1660,1662,1664,1666,1668,1670,1672,1674,1676,1678,1680,1682,1684,1686,
    1688,1690,1692,1694,1696,1698,1700,1702,1704,1706,1708,1710
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 48 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               528
  On-line CPU(s) list:                  0-527
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6980E+
  CPU family:                           6
  Model:                                221
  Thread(s) per core:                   1
  Core(s) per socket:                   264
  Socket(s):                            2
  Stepping:                             1
  CPU(s) scaling MHz:                   32%
  CPU max MHz:                          3200.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             4200.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
                                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                        cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
                                        clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                        user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts hwp
                                        hwp_act_window hwp_epp hwp_pkg_req vnmi umip pku ospke waitpkg gfni
                                        vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b
```

(Continued on next page)

Platform Notes (Continued)

```
                                  enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d
                                  arch_capabilities
  Virtualization:                 VT-x
  L1d cache:                      16.5 MiB (528 instances)
  L1i cache:                      33 MiB (528 instances)
  L2 cache:                       528 MiB (132 instances)
  L3 cache:                       1 GiB (2 instances)
  NUMA node(s):                   6
  NUMA node0 CPU(s):              0-87
  NUMA node1 CPU(s):              88-175
  NUMA node2 CPU(s):              176-263
  NUMA node3 CPU(s):              264-351
  NUMA node4 CPU(s):              352-439
  NUMA node5 CPU(s):              440-527
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                  PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K    16.5M    8 Data            1     64        1             64
     L1i       64K      33M    8 Instruction     1    128        1             64
     L2         4M     528M   16 Unified         2   4096        1             64
     L3       528M       1G   16 Unified         3 540672        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus: 0-87
  node 0 size: 257364 MB
  node 0 free: 236943 MB
  node 1 cpus: 88-175
  node 1 size: 258024 MB
  node 1 free: 238388 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 2 cpus: 176-263
  node 2 size: 258024 MB
  node 2 free: 236309 MB
  node 3 cpus: 264-351
  node 3 size: 258024 MB
  node 3 free: 238121 MB
  node 4 cpus: 352-439
  node 4 size: 257986 MB
  node 4 free: 238553 MB
  node 5 cpus: 440-527
  node 5 size: 257870 MB
  node 5 free: 237250 MB
  node distances:
  node   0   1   2   3   4   5
    0:  10  15  17  21  28  26
    1:  15  10  15  23  26  23
    2:  17  15  10  26  23  21
    3:  21  28  26  10  15  17
    4:  23  26  23  15  10  15
    5:  26  23  21  17  15  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584430020 kB

------------------------------------------------------------
10. who -r
  run-level 3 Aug 26 14:46

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled         ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                bluetooth chronyd cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                    wickedd-nanny wpa_supplicant
```

(Continued on next page)

Platform Notes (Continued)

```
   enabled-runtime  systemd-remount-fs
  disabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                   autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                  chrony-wait console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebtables
                   exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged ipmi
                   ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs
                  nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd
                    rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                      speech-dispatcherd systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                      update-system-flatpaks upower vncserver@ wpa_supplicant@
   indirect           pcscd saned@ systemd-userdbd wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
   root=UUID=0ae3eb24-ab4b-4b8e-874e-74e44871a98f
   splash=silent
   resume=/dev/disk/by-uuid/ee1f2cac-1352-4dc9-8ca2-e927f2abe04e
   mitigations=auto
   quiet
   security=apparmor

------------------------------------------------------------
15. cpupower frequency-info
   analyzing CPU 368:
     current policy: frequency should be within 800 MHz and 3.20 GHz.
                     The governor "performance" may decide which speed to use
                     within this range.
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
16. sysctl
   kernel.numa_balancing               1
   kernel.randomize_va_space           2
   vm.compaction_proactiveness        20
   vm.dirty_background_bytes           0
   vm.dirty_background_ratio          10
   vm.dirty_bytes                      0
   vm.dirty_expire_centisecs        3000
   vm.dirty_ratio                     20
   vm.dirty_writeback_centisecs      500
   vm.dirtytime_expire_seconds     43200
   vm.extfrag_threshold              500
   vm.min_unmapped_ratio               1
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/spec2026
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   3.0T  612G  2.4T  21% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         H3C
    Product:        R4900 G7 AP
    Product Family: Rack
    Serial:         210235A5QEH202606251

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
```

(Continued on next page)

Platform Notes (Continued)

```
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x Hynix HMCG94CMBRA772N 64 GB 2 rank 8000


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      7.10.25P94
    BIOS Date:         05/28/2026
    BIOS Revision:     5.35
    Firmware Revision: 3.1
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
        | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
        | 767.nest_r(base, peak) 772.marian_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
        | peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

737.gmsh_r: -fno-associative-math

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

Fortran benchmarks:
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/tcmalloc-2.18.1/lib
-ltcmalloc_minimal

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Peak Portability Flags

737.gmsh_r: -fno-associative-math

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: -m64 -std=c++17 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500

(Continued on next page)

Peak Optimization Flags (Continued)

731.astcenc_r (continued):
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

736.ocio_r: basepeak = yes

748.flightdm_r: Same as 731.astcenc_r

766.femflow_r: basepeak = yes

767.nest_r: Same as 731.astcenc_r

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

737.gmsh_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xclearwaterforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/New_H3C-Platform-Settings-Intel-CWF-RevA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/New_H3C-Platform-Settings-Intel-CWF-RevA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-08-26 10:11:42-0400.
Report generated on 2026-09-23 13:08:10 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-09-22.