



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

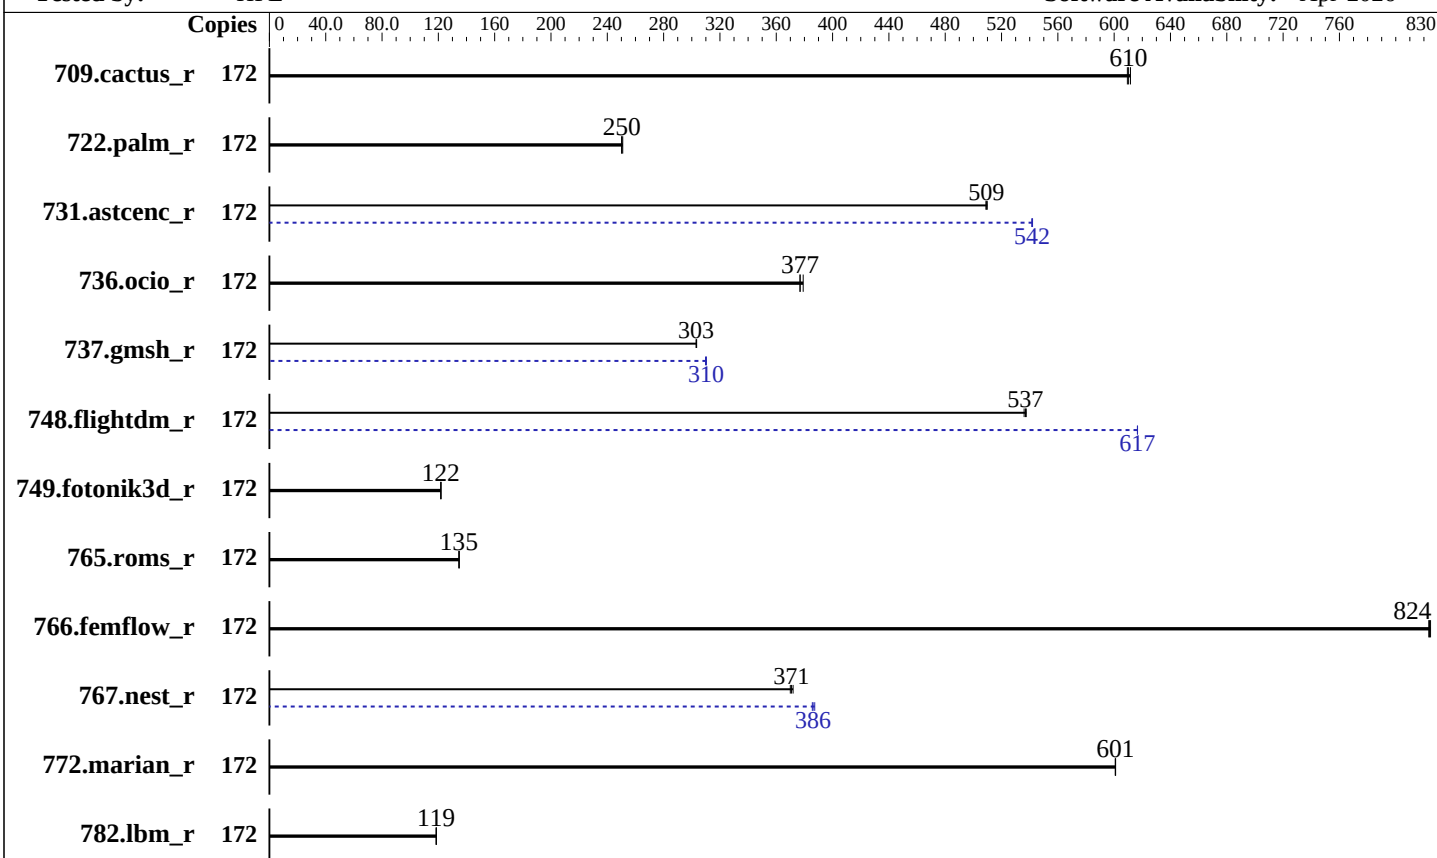

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 86 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 480 GB NVMe SSD
Cooling: Air
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.53.6-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: HPE BIOS Version v1.86 08/04/2026 released Aug-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator v5.3
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	172	<u>242</u>	<u>610</u>	241	612	242	609	172	<u>242</u>	<u>610</u>	241	612	242	609
722.palm_r	172	<u>907</u>	<u>250</u>	908	250	905	251	172	<u>907</u>	<u>250</u>	908	250	905	251
731.astcenc_r	172	283	510	<u>284</u>	<u>509</u>	284	509	172	267	541	<u>267</u>	<u>542</u>	267	542
736.ocio_r	172	399	377	397	379	<u>399</u>	<u>377</u>	172	399	377	397	379	<u>399</u>	<u>377</u>
737.gmsh_r	172	260	303	260	303	<u>260</u>	<u>303</u>	172	255	310	<u>255</u>	<u>310</u>	254	310
748.flightdm_r	172	<u>229</u>	<u>537</u>	229	538	230	536	172	200	617	200	616	<u>200</u>	<u>617</u>
749.fotonik3d_r	172	1633	122	1632	122	<u>1632</u>	<u>122</u>	172	1633	122	1632	122	<u>1632</u>	<u>122</u>
765.roms_r	172	<u>2011</u>	<u>135</u>	2010	135	2012	135	172	<u>2011</u>	<u>135</u>	2010	135	2012	135
766.femflow_r	172	306	823	306	825	<u>306</u>	<u>824</u>	172	306	823	306	825	<u>306</u>	<u>824</u>
767.nest_r	172	369	370	<u>368</u>	<u>371</u>	367	372	172	352	387	354	386	<u>353</u>	<u>386</u>
772.marian_r	172	452	601	452	601	<u>452</u>	<u>601</u>	172	452	601	452	601	<u>452</u>	<u>601</u>
782.lbm_r	172	831	119	<u>832</u>	<u>119</u>	832	118	172	831	119	<u>832</u>	<u>119</u>	832	118

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using 'systemctl stop tuned'

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the CentOS Stream 9, and the system compiler gcc 11.5.0

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Aggressive

Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Sat Sep 12 19:25:57 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srv
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

19. OS release

20. Disk information

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -srvnm

Linux 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501) x86_64

2. w

19:25:57 up 6:53, 4 users, load average: 57.63, 136.66, 156.47

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	pts/0	172.16.0.100	12:46	6:39m	0.02s	0.02s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	2062606
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	2062606
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42

sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups

sshd: root [priv]

sshd: root@notty

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
bash -c cd $SPEC/ && $SPEC/reportable-ic2026.0-lin-graniterapids-rate-smt-on-20260429.sh
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 172 -c
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=86 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --n=3 -o all fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 172 --configfile
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=86 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --iterations 3
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000434
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 172
1 physical ids (chips)
172 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                172
On-line CPU(s) list:   0-171
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6787P
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    86
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Platform Notes (Continued)

Socket(s):	1
Stepping:	1
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	4 MiB (86 instances)
L1i cache:	5.4 MiB (86 instances)
L2 cache:	172 MiB (86 instances)
L3 cache:	336 MiB (1 instance)
NUMA node(s):	2
NUMA node0 CPU(s):	0-42,86-128
NUMA node1 CPU(s):	43-85,129-171
Vulnerability Gather data sampling:	Not affected
Vulnerability Indirect target selection:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4M	12	Data	1	64	1	64
L1i	64K	5.4M	16	Instruction	1	64	1	64
L2	2M	172M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. `numactl --hardware`

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-42,86-128
node 0 size: 257699 MB
node 0 free: 236057 MB
node 1 cpus: 43-85,129-171
node 1 size: 257985 MB
node 1 free: 235234 MB
node distances:
node  0  1
 0:  10  12
 1:  12  10
```

9. `/proc/meminfo`

```
MemTotal:          528060988 kB
```

10. `who -r`

```
run-level 3 Sep 12 12:33
```

11. Systemd service manager version: `systemd 254 (254.27+suse.167.g130293e510)`

Default Target	Status
multi-user	running

12. Services, from `systemctl list-unit-files`

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-f-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Platform Notes (Continued)

autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd
snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd tuned
indirect udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
pcscd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
root=UUID=9172b5b6-752c-43ce-a95b-cfbfd26bd0db
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 40:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Platform Notes (Continued)

```
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode      0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

20. Disk information

SPEC is set to: /home/cpu2026

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2 btrfs 447G 289G 155G  66% /home
```

21. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:     HPE ProLiant Compute EL240 Gen12
Product Family: ProLiant
Serial:      PZLKVX2LMMG01J
```

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.86
BIOS Date: 08/04/2026
BIOS Revision: 1.86
Firmware Revision: 1.25

Compiler Version Notes

C | 782.lbm_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

C++ | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
| 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
| 767.nest_r(base, peak) 772.marian_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

C++, C | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base, peak)

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2026.0.0 Build 20260331

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Base Portability Flags

737.gmsh_r: -fno-associative-math

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl, -z, muldefs
-Wl, -plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Peak Portability Flags

737.gmsh_r: -fno-associative-math

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.ascenc_r: -m64 -std=c++17 -Wl, -z, muldefs
-Wl, -plugin-opt=-inline-threshold=1500

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

Peak Optimization Flags (Continued)

731.astcenc_r (continued):

-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio_r: basepeak = yes

748.flightdm_r: Same as 731.astcenc_r

766.femflow_r: basepeak = yes

767.nest_r: Same as 731.astcenc_r

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

737.gmsh_r: -m64 -std=c++17 -std=c18 -Wl, -z, muldefs
-Wl, -plugin-opt=-inline-threshold=1500
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.5.xml>



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL240 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026_fp_base = 331

SPECrate®2026_fp_peak = 338

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2026

Hardware Availability: Oct-2026

Software Availability: Apr-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-09-12 09:55:57-0400.

Report generated on 2026-10-07 10:41:55 by CPU2026 PDF formatter (unknown).

Originally published on 2026-10-06.