SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.
(Test Sponsor: Fujitsu)
PRIMERGY RX1440 M2,
AMD EPYC 9335, 3.00 GHz

SPECrate®2026_int_base = 171

SPECrate®2026_int_peak = Not Run

CPU2026 License:	19	**Test Date:**	Aug-2026
Test Sponsor:	Fujitsu	**Hardware Availability:**	Apr-2026
Tested by:	Fsas Technologies Inc.	**Software Availability:**	Jan-2026

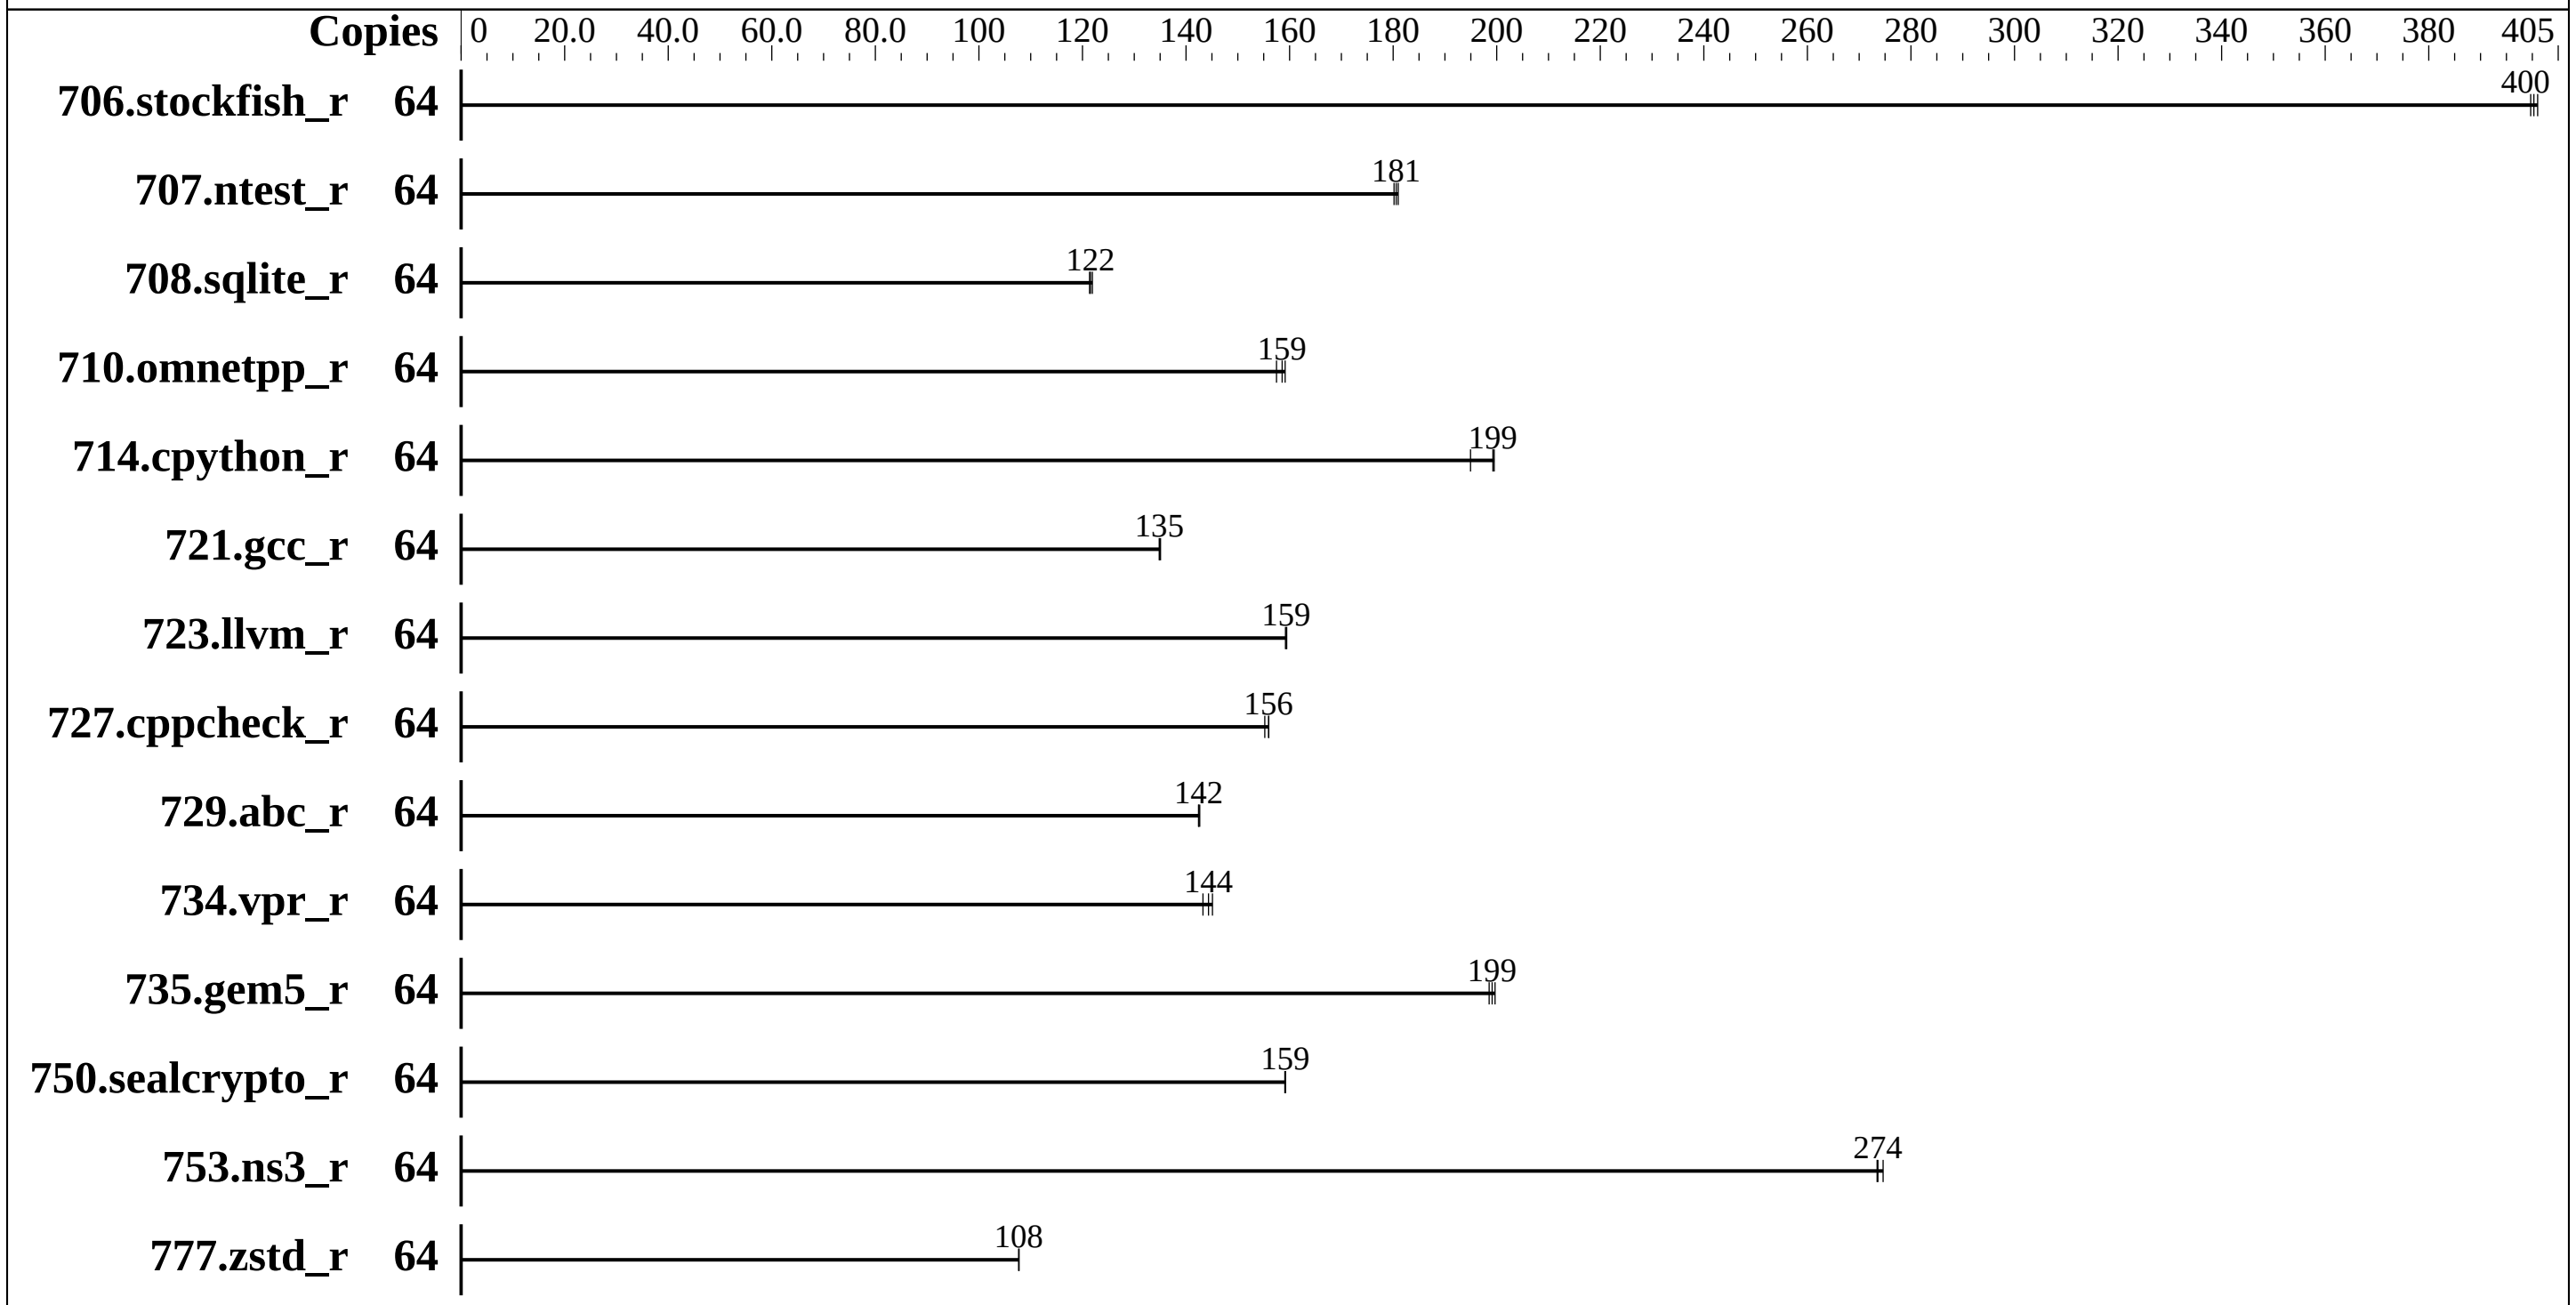

Hardware

CPU Name:	AMD EPYC 9335
Max MHz:	4400
Nominal:	3000
Enabled:	32 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx8 PC5-6400B-R, running at 5200)
Storage:	1 x SATA SSD, 960 GB
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP6 kernel version 6.4.0-150600.23.22-default
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	Fujitsu BIOS Version V5.0.0.35 R2.13.0 for D4130-A1x. Released Aug-2026 tested as V5.0.0.35 R2.12.0 for D4130-A1x Apr-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of aditional power usage

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.
(Test Sponsor: Fujitsu)
PRIMERGY RX1440 M2,
AMD EPYC 9335, 3.00 GHz

SPECrate®2026_int_base = 171

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.

Test Date: Aug-2026
Hardware Availability: Apr-2026
Software Availability: Jan-2026

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	64	201	401	**201**	**400**	202	400							
707.ntest_r	64	**210**	**181**	210	180	209	181							
708.sqlite_r	64	278	121	**278**	**122**	277	122							
710.omnetpp_r	64	**196**	**159**	195	159	198	157							
714.cpython_r	64	157	195	154	200	**154**	**199**							
721.gcc_r	64	**326**	**135**	326	135	325	135							
723.llvm_r	64	204	159	**204**	**159**	204	159							
727.cppcheck_r	64	147	156	**147**	**156**	148	155							
729.abc_r	64	**206**	**142**	206	143	206	142							
734.vpr_r	64	206	143	**204**	**144**	203	145							
735.gem5_r	64	157	199	**157**	**199**	156	200							
750.sealcrypto_r	64	215	159	**216**	**159**	216	159							
753.ns3_r	64	143	275	143	273	**143**	**274**							
777.zstd_r	64	383	108	383	108	**383**	**108**							

SPECrate®2026_int_base = 171

SPECrate®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/cpu2026-1.0.1/amd_rate_aocc510_znver5_B_lib/lib:/home/B
     enchmark/cpu2026-1.0.1/amd_rate_aocc510_znver5_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04
```

Platform Notes

```
BIOS configuration:
Determinism Slider = Power
TDP Control = Manual
TDP Limit = 240
Package Power Limit Control = Manual
Package Power Limit = 240
Power Profile Selection = High Performance
NUMA nodes per socket = NPS4
Probe Filter Organization = Shared
FAN Control = Full

 Sysinfo program /home/Benchmark/cpu2026-1.0.1/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Fri Aug 21 23:09:36 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
   1. uname -srvm
   2. w
   3. Username
   4. ulimit -a
   5. sysinfo process ancestry
   6. /proc/cpuinfo
   7. lscpu
   8. numactl --hardware
   9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent_hugepage
  17. /sys/kernel/mm/transparent_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
   Linux 6.4.0-150600.23.22-default #1 SMP PREEMPT_DYNAMIC Fri Sep 13 10:42:50 UTC 2024 (5c05eeb) x86_64

------------------------------------------------------------
2. w
    23:09:36 up 5 min,  2 users,  load average: 0.16, 0.21, 0.12
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                23:08   16.00s  1.67s  0.70s python3
  ./run_amd_rate_aocc510_znver5_B1_intrate.py
  root     pts/0    192.168.10.106   23:08   29.00s  0.02s  0.02s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 1542851
```

(Continued on next page)

Platform Notes (Continued)

```
    max locked memory       (kbytes, -l) 2048
    max memory size         (kbytes, -m) unlimited
    open files                      (-n) 1024
    pipe size            (512 bytes, -p) 8
    POSIX message queues     (bytes, -q) 819200
    real-time priority              (-r) 0
    stack size              (kbytes, -s) unlimited
    cpu time               (seconds, -t) unlimited
    max user processes              (-u) 1542851
    virtual memory          (kbytes, -v) unlimited
    file locks                      (-x) unlimited

  ------------------------------------------------------------
  5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=42
   login -- root
   -bash
   -bash
   python3 ./run_amd_rate_aocc510_znver5_B1_intrate.py
   runcpu --config amd_rate_aocc510_znver5_B1.cfg --tune base --reportable --iterations 3 intrate
   runcpu --configfile amd_rate_aocc510_znver5_B1.cfg --tune base --reportable --iterations 3 --nopower
     --runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2026.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
  $SPEC = /home/Benchmark/cpu2026-1.0.1

  ------------------------------------------------------------
  6. /proc/cpuinfo
      model name      : AMD EPYC 9335 32-Core Processor
      vendor_id       : AuthenticAMD
      cpu family      : 26
      model           : 2
      stepping        : 1
      microcode       : 0xb002162
      bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
      TLB size        : 192 4K pages
      cpu cores       : 32
      siblings        : 64
      1 physical ids (chips)
      64 processors (hardware threads)
      physical id 0: core ids 0-31
      physical id 0: apicids 0-63
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

  ------------------------------------------------------------
  7. lscpu
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu from util-linux 2.39.3:
  Architecture:                        x86_64
  CPU op-mode(s):                      32-bit, 64-bit
  Address sizes:                       52 bits physical, 57 bits virtual
  Byte Order:                          Little Endian
  CPU(s):                              64
  On-line CPU(s) list:                 0-63
  Vendor ID:                           AuthenticAMD
  BIOS Vendor ID:                      Advanced Micro Devices, Inc.
  Model name:                          AMD EPYC 9335 32-Core Processor
  BIOS Model name:                     AMD EPYC 9335 32-Core Processor                Unknown CPU @ 3.0GHz
  BIOS CPU family:                     107
  CPU family:                          26
  Model:                               2
  Thread(s) per core:                  2
  Core(s) per socket:                  32
  Socket(s):                           1
  Stepping:                            1
  Frequency boost:                     enabled
  CPU(s) scaling MHz:                  73%
  CPU max MHz:                         4420.8979
  CPU min MHz:                         1500.0000
  BogoMIPS:                            5991.27
  Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                       rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                       extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                       sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                       cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                       osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                       perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                       ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                       smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                       avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                       xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                       cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                       xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                       nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                       pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                       avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                       avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                       movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                       flush_l1d debug_swap amd_lbr_pmc_freeze
  Virtualization:                      AMD-V
  L1d cache:                           1.5 MiB (32 instances)
  L1i cache:                           1 MiB (32 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
    L2 cache:                          32 MiB (32 instances)
    L3 cache:                          128 MiB (4 instances)
    NUMA node(s):                      4
    NUMA node0 CPU(s):                 0-7,32-39
    NUMA node1 CPU(s):                 8-15,40-47
    NUMA node2 CPU(s):                 16-23,48-55
    NUMA node3 CPU(s):                 24-31,56-63
    Vulnerability Gather data sampling:  Not affected
    Vulnerability Itlb multihit:       Not affected
    Vulnerability L1tf:                Not affected
    Vulnerability Mds:                 Not affected
    Vulnerability Meltdown:            Not affected
    Vulnerability Mmio stale data:     Not affected
    Vulnerability Reg file data sampling: Not affected
    Vulnerability Retbleed:            Not affected
    Vulnerability Spec rstack overflow:  Not affected
    Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
    Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
    Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                       always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
    Vulnerability Srbds:               Not affected
    Vulnerability Tsx async abort:     Not affected

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
       L1d       48K     1.5M   12 Data            1    64        1             64
       L1i       32K       1M    8 Instruction     1    64        1             64
       L2         1M      32M   16 Unified         2  1024        1             64
       L3        32M     128M   16 Unified         3 32768        1             64

  ------------------------------------------------------------
  8. numactl --hardware
  NOTE: a numactl 'node' might or might not correspond to a physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0-7,32-39
    node 0 size: 95938 MB
    node 0 free: 95486 MB
    node 1 cpus: 8-15,40-47
    node 1 size: 96725 MB
    node 1 free: 96277 MB
    node 2 cpus: 16-23,48-55
    node 2 size: 96763 MB
    node 2 free: 96240 MB
    node 3 cpus: 24-31,56-63
    node 3 size: 96312 MB
    node 3 free: 95843 MB
    node distances:
```

(Continued on next page)

Platform Notes (Continued)

```
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
    3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       394996740 kB

------------------------------------------------------------
10. who -r
  run-level 3 Aug 21 23:04

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                   iscsi issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nscd
                   postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore virtqemud wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid
                   issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
                   nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd serial-getty@
                   smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@
                   systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced
                   virtlockd virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecretd virtstoraged
                   vncserver@
  indirect         pcscd systemd-userdbd tftp wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.22-default
  root=UUID=874a8456-2509-4663-baf4-1f501264c5d3
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
```

(Continued on next page)

Platform Notes (Continued)

```
  crashkernel=384M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 60:
    current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes         0
  vm.dirty_background_ratio        10
  vm.dirty_bytes                    0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
```

(Continued on next page)

Platform Notes (Continued)

```
    max_ptes_shared          256
    max_ptes_swap             64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

 ------------------------------------------------------------
 18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/Benchmark/cpu2026-1.0.1
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   851G  173G  679G  21% /home

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
      Vendor:         FUJITSU
      Product:        PRIMERGY RX1440 M2
      Product Family: SERVER
      Serial:         XXXXXXXXXX

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      4x Micron Technology MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400, configured at 5200
      8x SK Hynix HMCG88AHBRA478N 32 GB 2 rank 6400, configured at 5200


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
     BIOS Vendor:       FUJITSU // American Megatrends Inc.
     BIOS Version:      V5.0.0.35 R2.12.0 for D4130-A1x
     BIOS Date:         04/13/2026
     BIOS Revision:     2.12
     Firmware Revision: 2.49
```

Compiler Version Notes

```
==============================================================================
C      | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++    | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
       | 753.ns3_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
       | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Benchmarks using both C and C++:
`clang++ clang`

Base Optimization Flags

C benchmarks:
`-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html
http://www.spec.org/cpu2026/results/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevF.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml
http://www.spec.org/cpu2026/results/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevF.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-08-21 10:09:35-0400.
Report generated on 2026-10-07 10:44:11 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-10-06.