



# SPEC<sup>®</sup> MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6282 SE, 2.6GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 3.64

MPI2007 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Feb-2012

Hardware Availability: Nov-2011

Software Availability: Nov-2011

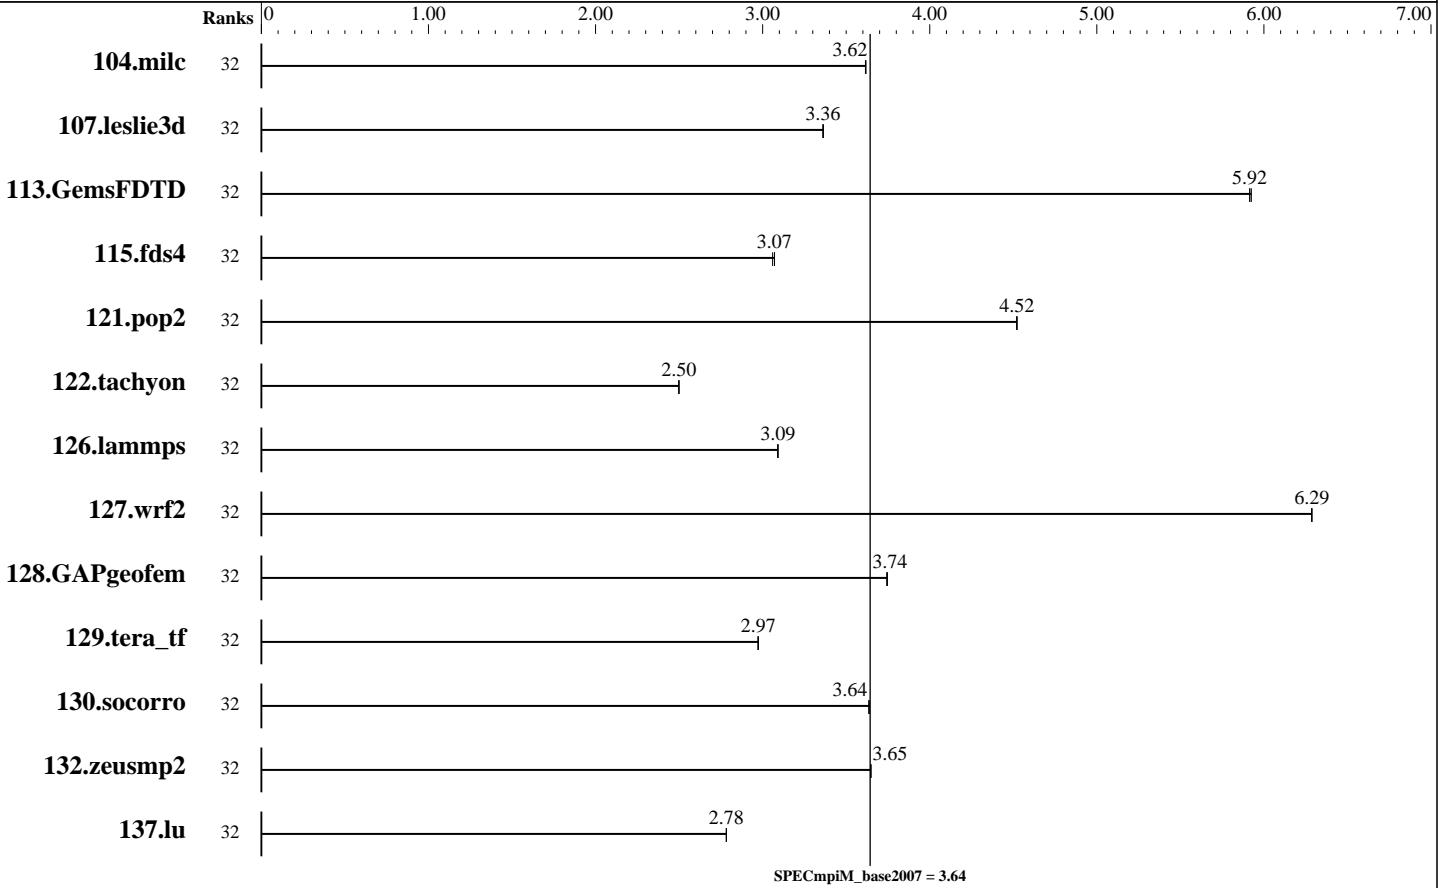

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	32	433	3.62	433	3.62	<b>433</b>	<b>3.62</b>									
107.leslie3d	32	1553	3.36	1552	3.36	<b>1553</b>	<b>3.36</b>									
113.GemsFDTD	32	<b>1066</b>	<b>5.92</b>	1066	5.92	1065	5.92									
115.fds4	32	638	3.06	<b>635</b>	<b>3.07</b>	635	3.07									
121.pop2	32	913	4.52	913	4.52	<b>913</b>	<b>4.52</b>									
122.tachyon	32	1120	2.50	1119	2.50	<b>1119</b>	<b>2.50</b>									
126.lammps	32	943	3.09	943	3.09	<b>943</b>	<b>3.09</b>									
127.wrf2	32	1240	6.29	<b>1240</b>	<b>6.29</b>	1240	6.29									
128.GAPgeofem	32	551	3.75	552	3.74	<b>552</b>	<b>3.74</b>									
129.tera_tf	32	931	2.97	<b>931</b>	<b>2.97</b>	931	2.97									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6282 SE, 2.6GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 3.64

MPI2007 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Feb-2012  
Hardware Availability: Nov-2011  
Software Availability: Nov-2011

### Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
130.socorro	32	1050	3.64	1050	3.64	<b>1050</b>	<b>3.64</b>									
132.zeusmp2	32	851	3.65	<b>851</b>	<b>3.65</b>	851	3.65									
137.lu	32	1321	2.78	1321	2.78	<b>1321</b>	<b>2.78</b>									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: SGI Altix ICE 8400EX Compute Node  
 Interconnect: InfiniBand (MPI and I/O)  
 File Server Node: SGI InfiniteStorage 4000  
 Total Compute Nodes: 1  
 Total Chips: 2  
 Total Cores: 32  
 Total Threads: 32  
 Total Memory: 128 GB  
 Base Ranks Run: 32  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

#### Software Summary

C Compiler: Intel C Compiler for Linux, Version 11.1.073 Build 20100806  
 C++ Compiler: Intel C++ Compiler for Linux, Version 11.1.073 Build 20100806  
 Fortran Compiler: Intel Fortran Compiler for Linux, Version 11.1.073 Build 20100806  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: SGI MPT 2.05  
 Other MPI Info: OFED 1.5.2  
 Pre-processors: None  
 Other Software: None

### Node Description: SGI Altix ICE 8400EX Compute Node

#### Hardware

Number of nodes: 1  
 Uses of the node: compute  
 Vendor: SGI  
 Model: SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.6GHz)  
 CPU Name: AMD Opteron 6282 SE  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 32  
 Cores per chip: 16  
 Threads per core: 1  
 CPU Characteristics: 16 cores/chip, 2.6 GHz  
 AMD Turbo CORE technology up to 3.30 GHz  
 CPU MHz: 2600  
 Primary Cache: 512 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB I+D on chip per core  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: None  
 Other Hardware: None  
 Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)

#### Software

Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)  
 Adapter Driver: OFED-1.5.2  
 Adapter Firmware: 2.7.0  
 Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64) Kernel 2.6.32.46-0.3-default #1 SMP  
 Local File System: NFSv3  
 Shared File System: NFSv3 IPoIB  
 System State: Run level 3 (Multi-User)  
 Other Software: SGI Performance Suite 1.3, Build 705rp8.sles11-1111092106  
 SGI Tempo Compute Node 2.5, Build 705r10.sles11-1111092111

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6282 SE, 2.6GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 3.64

MPI2007 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Feb-2012  
Hardware Availability: Nov-2011  
Software Availability: Nov-2011

### Node Description: SGI Altix ICE 8400EX Compute Node

Number of Adapters: 1  
Slot Type: PCIe x8 Gen2  
Data Rate: InfiniBand 4x QDR  
Ports Used: 2  
Interconnect Type: InfiniBand

### Node Description: SGI InfiniteStorage 4000

#### Hardware

Number of nodes: 1  
Uses of the node: fileserver  
Vendor: SGI  
Model: SGI Altix 450 (Intel Itanium 2, 1.6GHz)  
CPU Name: Intel Itanium 2 9030  
CPU(s) orderable: 2-38 chips  
Chips enabled: 2  
Cores enabled: 4  
Cores per chip: 2  
Threads per core: 1  
CPU Characteristics: 1.6GHz/8MB, 533MHz FSB  
CPU MHz: 1600  
Primary Cache: 16 KB I + 16 KB D on chip per core  
Secondary Cache: 1 MB I + 256 KB D on chip per core  
L3 Cache: 4 MB I+D on chip per core  
Other Cache: None  
Memory: 24 GB (12 x 2 GB, 2Rx4 PC2-3200-3, ECC)  
Disk Subsystem: 16 TB RAID 5  
32 x 500 GB SATA (Seagate Barracuda 7.2K)  
Other Hardware: None  
Adapter: Mellanox MT25208 InfiniHost III Ex  
(PCIe x8 Gen1 2.5 GT/s)  
Number of Adapters: 2  
Slot Type: PCIe x8 Gen1  
Data Rate: InfiniBand 4x DDR  
Ports Used: 2  
Interconnect Type: InfiniBand

#### Software

Adapter: Mellanox MT25208 InfiniHost III Ex  
(PCIe x8 Gen1 2.5 GT/s)  
Adapter Driver: OFED-1.4.2  
Adapter Firmware: 5.3.0  
Operating System: SUSE Linux Enterprise Server 11 SP1 (ia64)  
Kernel 2.6.32.12-0.7-default  
Local File System: xfs  
Shared File System: --  
System State: Run Level 3 (Multi-User)  
Other Software: SGI ProPack 7SP1 for Linux,  
Build 701r2.sles11-1005242307

### Interconnect Description: InfiniBand (MPI and I/O)

#### Hardware

Vendor: Mellanox Technologies and SGI  
Model: None  
Switch Model: SGI QDR\_1.5\_HYPR\_2454 with Mellanox Device 48438  
(Infiniscale IV)  
Number of Switches: 2  
Number of Ports: 36

#### Software

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6282 SE, 2.6GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 3.64

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Feb-2012

Hardware Availability: Nov-2011

Software Availability: Nov-2011

## Interconnect Description: InfiniBand (MPI and I/O)

Data Rate: InfiniBand 4x QDR  
Firmware: 5040005  
Topology: Enhanced Hypercube  
Primary Use: MPI and I/O traffic

## Submit Notes

The config file option 'submit' was used.

## General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_BUFS_THRESHOLD=1
export MPI_IB_RAILS=2
ulimit -s unlimited
```

BIOS settings:

AMI BIOS version 2.0

Job Placement:

In the base run, each MPI job is assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 2 switch for up to 256 ranks, 4 switches for 512 ranks.

Additional notes regarding interconnect:

The Infiniband network consists of two independent planes, with half the switches in the system allocated to each plane. I/O traffic is restricted to one plane, while MPI traffic can use both planes.

SGI manufactures its own switch blades using unmodified Mellanox switch ASICs. The test system has SGI QDR\_1.5\_HYPR\_2454 switch with Mellanox 36-port QDR Infiniband switch Device 48438 (InfiniScale IV).

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6282 SE, 2.6GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 3.64

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Feb-2012

Hardware Availability: Nov-2011

Software Availability: Nov-2011

## Base Compiler Invocation (Continued)

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX

## Base Optimization Flags

C benchmarks:

-O3 -xSSE2 -ipo -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xSSE2 -ipo -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xSSE2 -ipo -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE2 -ipo -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6282 SE, 2.6GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 3.64

**MPI2007 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Feb-2012

**Hardware Availability:** Nov-2011

**Software Availability:** Nov-2011

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel1111\\_flags.20120720.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel1111_flags.20120720.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel1111\\_flags.20120720.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel1111_flags.20120720.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Tue Jul 22 13:44:17 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 22 February 2012.