



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2488H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 37.9

MPI2007 license: 27


Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

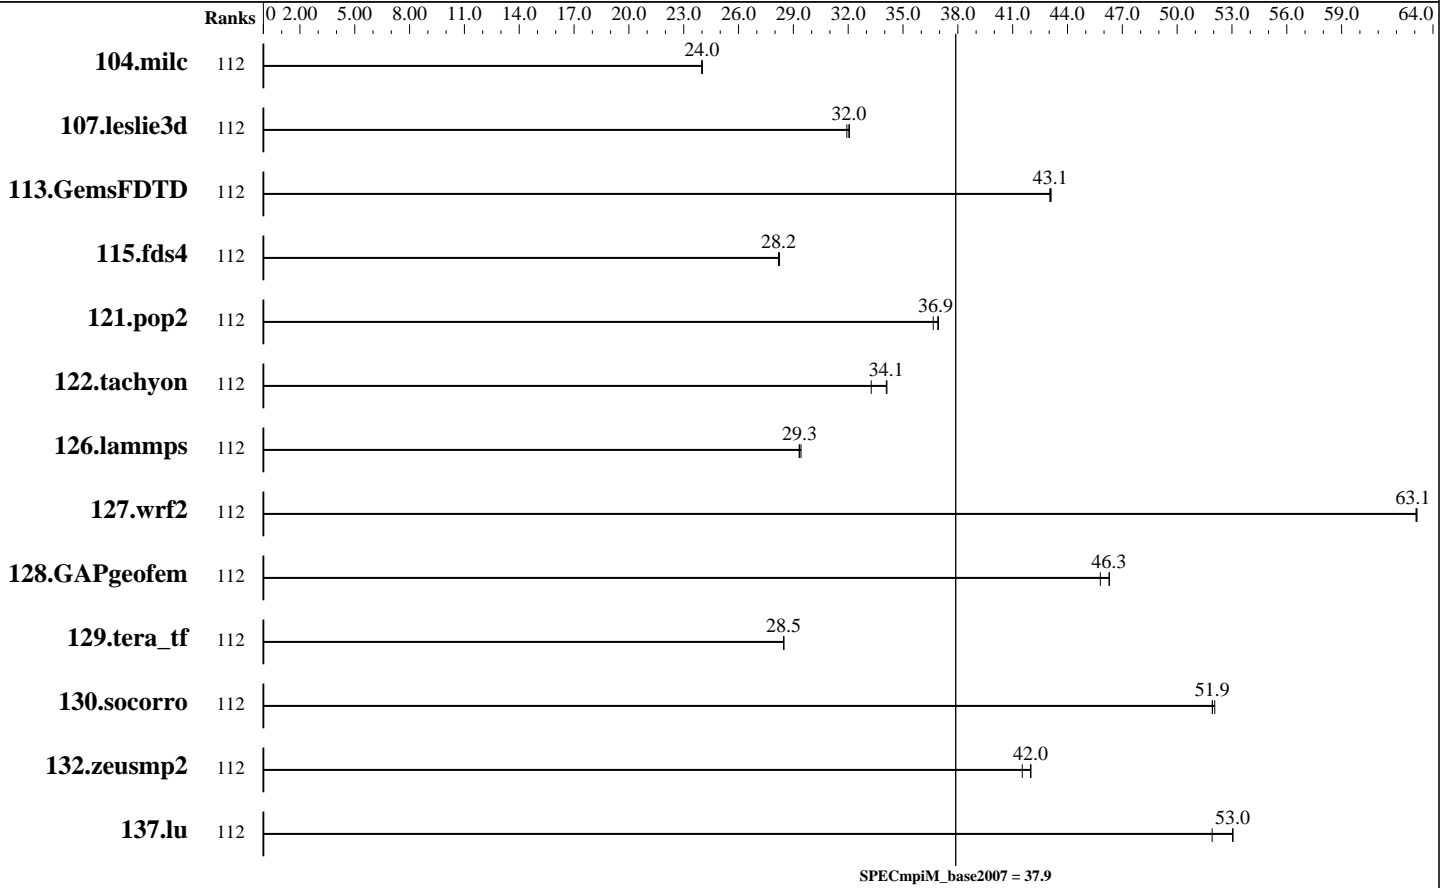

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	112	65.2	24.0	<u>65.2</u>	<u>24.0</u>	65.1	24.0									
107.leslie3d	112	164	31.9	163	32.1	<u>163</u>	<u>32.0</u>									
113.GemsFDTD	112	<u>146</u>	<u>43.1</u>	146	43.1	147	43.0									
115.fds4	112	69.2	28.2	69.1	28.2	<u>69.2</u>	<u>28.2</u>									
121.pop2	112	113	36.7	<u>112</u>	<u>36.9</u>	112	36.9									
122.tachyon	112	84.1	33.3	<u>82.1</u>	<u>34.1</u>	82.0	34.1									
126.lammps	112	<u>99.4</u>	<u>29.3</u>	99.4	29.3	99.1	29.4									
127.wrf2	112	124	63.1	<u>124</u>	<u>63.1</u>	124	63.1									
128.GAPgeofem	112	44.6	46.3	<u>44.6</u>	<u>46.3</u>	45.1	45.8									
129.tera_tf	112	<u>97.2</u>	<u>28.5</u>	97.2	28.5	97.2	28.5									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2488H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 37.9

MPI2007 license: 27

Test date: Feb-2019

Test sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Feb-2019

Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	112	<u>73.5</u>	<u>51.9</u>	73.3	52.1	73.5	51.9							
132.zeusmp2	112	<u>73.9</u>	<u>42.0</u>	73.9	42.0	74.7	41.5							
137.lu	112	69.3	53.1	<u>69.3</u>	<u>53.0</u>	70.8	51.9							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: Huawei 2488H V5
 File Server Node: Huawei 2488H V5
 Head Node: Huawei 2488H V5
 Total Compute Nodes: 1
 Total Chips: 4
 Total Cores: 112
 Total Threads: 112
 Total Memory: 1536 GB
 Base Ranks Run: 112
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5
 C++ Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5
 Fortran Compiler: Intel Fortran Composer XE 2018 for Linux, Version 18.0.5
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 MPI Library: Intel MPI Library for Linux, Version 2018 Update 4
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: Huawei 2488H V5

Hardware

Number of nodes: 1
 Uses of the node: head, compute, fileserver
 Vendor: Huawei
 Model: Huawei 2488H V5
 CPU Name: Intel Xeon Platinum 8280
 CPU(s) orderable: 2,4 chip
 Chips enabled: 4
 Cores enabled: 112
 Cores per chip: 28
 Threads per core: 1
 CPU Characteristics: None
 CPU MHz: 2700
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Disk Subsystem: 1 x 900 GB 10K RPM SAS HDD,RAID 0
 Other Hardware: None
 Adapter: N/A
 Number of Adapters: 0
 Slot Type: N/A
 Data Rate: N/A

Software

Adapter: N/A
 Adapter Driver: N/A
 Adapter Firmware: N/A
 Operating System: SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
 Local File System: btrfs
 Shared File System: None
 System State: Multi-User, run level 3
 Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2488H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 37.9

MPI2007 license: 27

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Node Description: Huawei 2488H V5

Ports Used: 0
Interconnect Type: N/A

Submit Notes

The config file option 'submit' was used.

General Notes

MPI startup command:

mpiexec.hydra command was used to start MPI jobs.

BIOS settings:

Intel Hyper-Threading Technology :Disabled

Intel Turbo Boost Technology :Enabled (default is Enabled)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:

mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:

mpiifort

Benchmarks using both Fortran and C:

mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

126.lammps: -DMPICH_IGNORE_CXX_SEEK

127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2488H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 37.9

MPI2007 license: 27

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX2 -no-prec-div

Fortran benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX2 -no-prec-div

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/Huawei_x86_64_Intel_linux.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/Huawei_x86_64_Intel_linux.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Tue Apr 2 18:30:40 2019 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 2 April 2019.