



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
(AMD EPYC 7H12 CPU, 2.6 GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 17.7

MPI2007 license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2020

Hardware Availability: Jun-2020

Software Availability: Dec-2018

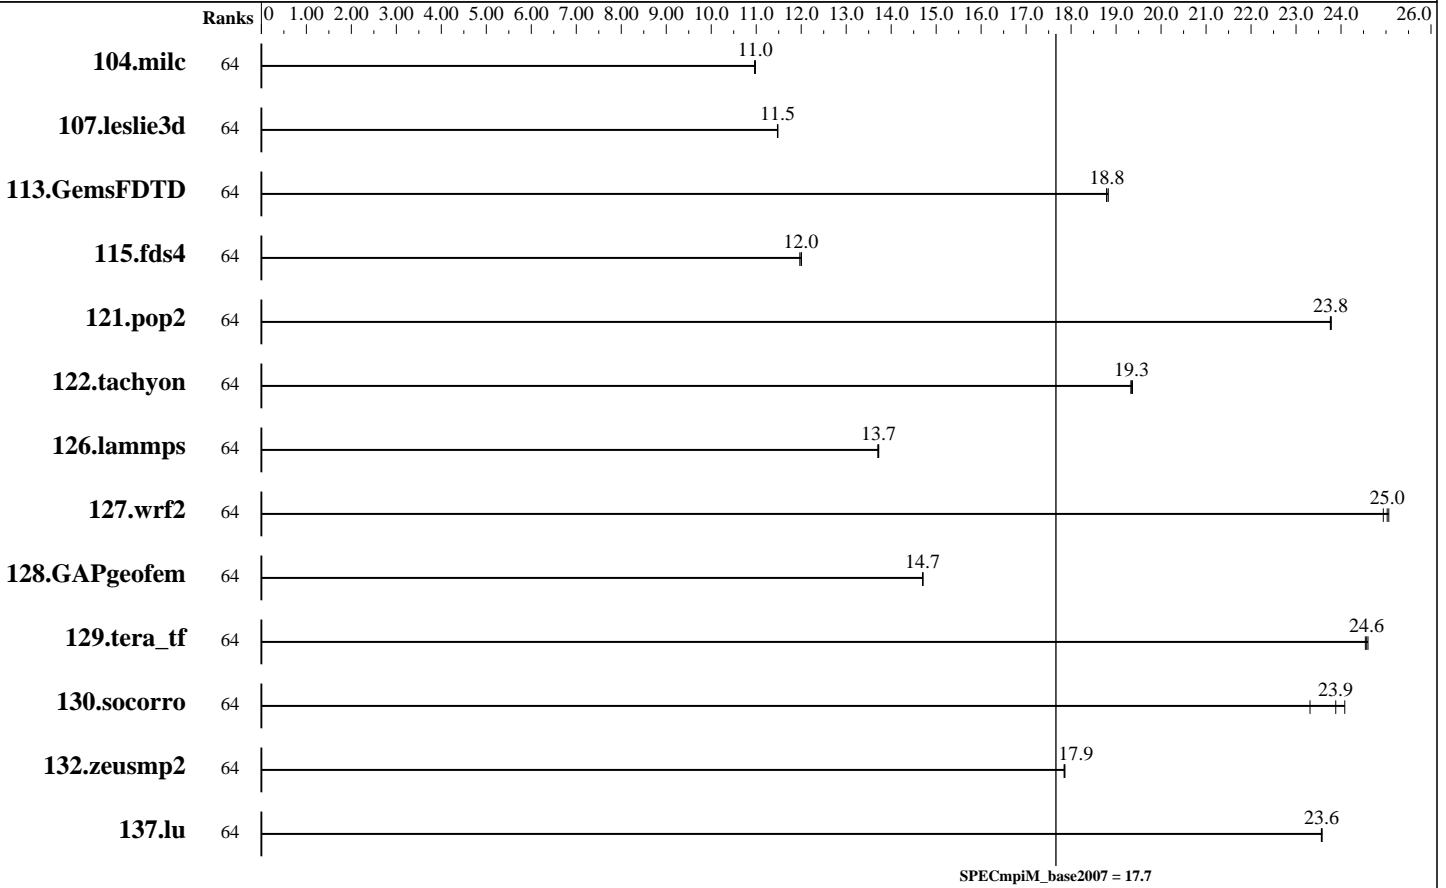

## Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	64	143	11.0	143	11.0	<b>143</b>	<b>11.0</b>							
107.leslie3d	64	<b>455</b>	<b>11.5</b>	455	11.5	455	11.5							
113.GemsFDTD	64	<b>336</b>	<b>18.8</b>	336	18.8	335	18.8							
115.fds4	64	163	12.0	162	12.0	<b>163</b>	<b>12.0</b>							
121.pop2	64	174	23.8	174	23.8	<b>174</b>	<b>23.8</b>							
122.tachyon	64	<b>145</b>	<b>19.3</b>	144	19.4	145	19.3							
126.lammps	64	213	13.7	212	13.7	<b>212</b>	<b>13.7</b>							
127.wrf2	64	<b>312</b>	<b>25.0</b>	313	24.9	311	25.1							
128.GAPgeofem	64	140	14.7	<b>140</b>	<b>14.7</b>	141	14.7							
129.tera_tf	64	<b>113</b>	<b>24.6</b>	113	24.5	113	24.6							

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECmpiM\_peak2007 = Not Run

ThinkSystem SR655  
(AMD EPYC 7H12 CPU, 2.6 GHz)

SPECmpiM\_base2007 = 17.7

MPI2007 license: 28

Test date: Jan-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

### Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	64	<b>160</b>	<b>23.9</b>	158	24.1	164	23.3							
132.zeusmp2	64	<b>174</b>	<b>17.9</b>	174	17.9	174	17.8							
137.lu	64	<b>156</b>	<b>23.6</b>	156	23.6	156	23.6							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: ThinkSystem SR655  
 Total Compute Nodes: 1  
 Total Chips: 1  
 Total Cores: 64  
 Total Threads: 64  
 Total Memory: 256 GB  
 Base Ranks Run: 64  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

#### Software Summary

C Compiler: Intel C++ Compiler 17.0 Update 7 for Linux  
 Version 17.0.7 Build 20180403  
 C++ Compiler: Intel C++ Compiler 17.0 Update 7 for Linux  
 Version 17.0.7 Build 20180403  
 Fortran Compiler: Intel Fortran Compiler 17.0 Update 7 for Linux  
 Version 17.0.7 Build 20180403  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 MPI Library: Intel MPI Library for Linux\* OS  
 Version 2018 Update 3 Build 20180411  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: None

### Node Description: ThinkSystem SR655

#### Hardware

Number of nodes: 1  
 Uses of the node: compute  
 Vendor: Lenovo Global Technology  
 Model: SR655  
 CPU Name: AMD EPYC 7H12 CPU  
 CPU(s) orderable: 1 chips  
 Chips enabled: 1  
 Cores enabled: 64  
 Cores per chip: 64  
 Threads per core: 1  
 CPU Characteristics: None  
 CPU MHz: 2600  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 256 MB I+D on chip per chip  
 16 MB shared / 4 cores  
 Other Cache: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC4-3200AA-R)  
 Disk Subsystem: 1 x 480 GB SATA 2.5" SSD  
 Other Hardware: None  
 Adapter: None  
 Number of Adapters: 0  
 Slot Type: None  
 Data Rate: None

#### Software

Adapter: None  
 Adapter Driver: None  
 Adapter Firmware: None  
 Operating System: SUSE Linux Enterprise Linux Server 12 SP 4  
 4.12.14-94.41-default  
 Local File System: xfs  
 Shared File System: None  
 System State: Multi-user, run level 3  
 Other Software: None

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECmpiM\_peak2007 = Not Run

ThinkSystem SR655  
(AMD EPYC 7H12 CPU, 2.6 GHz)

SPECmpiM\_base2007 = 17.7

MPI2007 license: 28

Test date: Jan-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

### Node Description: ThinkSystem SR655

Ports Used: 0  
Interconnect Type: None

### Submit Notes

The config file option 'submit' was used.

### General Notes

MPI startup command:  
mpiexec command was used to start MPI jobs.

RAM configuration:  
Compute nodes have 1 x 32 GB RDIMM on each memory channel.

Add "idle=poll" into grub

BIOS settings:  
Operating Mode : Maximum Performance Mode  
Hyper-Threading Technology (SMT): Disabled  
NPS4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Base Compiler Invocation

C benchmarks:  
mpiicc

C++ benchmarks:  
126.lammps: mpiicpc

Fortran benchmarks:  
mpiifort

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM\_peak2007 = Not Run

ThinkSystem SR655  
(AMD EPYC 7H12 CPU, 2.6 GHz)

SPECmpiM\_base2007 = 17.7

MPI2007 license: 28

Test date: Jan-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
mpiicc mpiifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK  
127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX  
130.socorro: -assume nostd\_intent\_in

## Base Optimization Flags

C benchmarks:  
-O3 -march=core-avx2 -no-prec-div -ipo

C++ benchmarks:  
126.lammps: -O3 -march=core-avx2 -no-prec-div -ipo

Fortran benchmarks:  
-O3 -march=core-avx2 -no-prec-div -ipo

Benchmarks using both Fortran and C:  
-O3 -march=core-avx2 -no-prec-div -ipo

The flags files that were used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20190807.html](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20190807.html)  
[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.20190807.html](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.20190807.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20190807.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20190807.xml)  
[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.20190807.xml](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.20190807.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Mon Mar 16 10:19:11 2020 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 12 March 2020.