



SPEC® OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

SPECompG_peak2012 = 90.9

Superdome Flex (Intel Xeon Gold 6154, 3.00 GHz)

SPECompG_base2012 = 85.2

OMP2012 license:l


Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

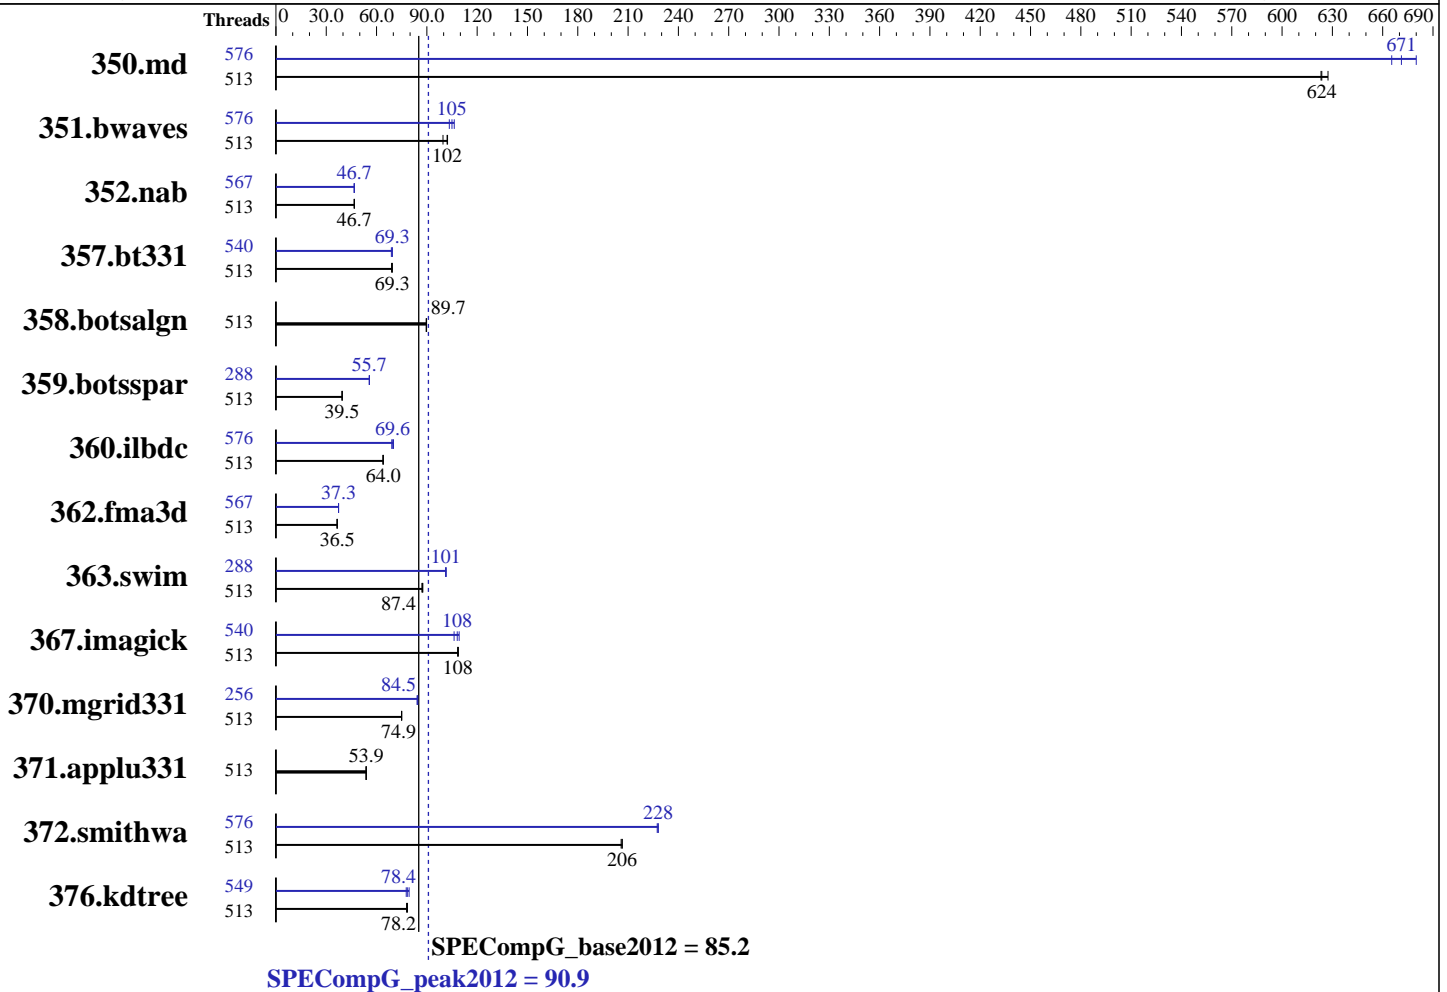

Hardware

CPU Name: Intel Xeon Gold 6154
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3000
 CPU MHz Maximum: 3700
 FPU: Integrated
 CPU(s) enabled: 288 cores, 16 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 4-32 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 24.75 MB I+D on chip per chip
 Other Cache: None
 Memory: 6 TB (192 x 32 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: tmpfs
 Other Hardware: None
 Base Threads Run: 513
 Minimum Peak Threads: 256

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2
 Kernel 4.4.74-92.38-default
 Compiler: C/C++/Fortran: Version 18.0.0.128 of Intel
 Composer XE for Linux, Build 20170811
 Auto Parallel: No
 File System: tmpfs
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: HPE Foundation Software 1.0,
 Build 717a270.sles12sp2-1709012000



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

SPECompG_peak2012 = 90.9

Superdome Flex (Intel Xeon Gold 6154, 3.00 GHz)

SPECompG_base2012 = 85.2

OMP2012 license: l

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Maximum Peak Threads: 576

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	513	7.43	623	<u>7.42</u>	<u>624</u>	7.38	627	576	6.96	665	<u>6.90</u>	<u>671</u>	6.81	680
351.bwaves	513	<u>44.4</u>	<u>102</u>	45.5	99.6	44.3	102	576	42.6	106	43.8	103	<u>43.2</u>	<u>105</u>
352.nab	513	83.2	46.8	83.3	46.7	<u>83.2</u>	<u>46.7</u>	567	83.3	46.7	83.2	46.7	<u>83.3</u>	<u>46.7</u>
357.bt331	513	68.3	69.4	<u>68.4</u>	<u>69.3</u>	68.7	69.0	540	<u>68.4</u>	<u>69.3</u>	68.3	69.4	68.9	68.8
358.botsalgn	513	<u>48.5</u>	<u>89.7</u>	48.5	89.6	48.4	89.8	513	<u>48.5</u>	<u>89.7</u>	48.5	89.6	48.4	89.8
359.botsspar	513	133	39.4	133	39.5	<u>133</u>	<u>39.5</u>	288	94.2	55.7	94.3	55.7	<u>94.2</u>	<u>55.7</u>
360.ilbdc	513	<u>55.7</u>	<u>64.0</u>	55.6	64.0	55.8	63.8	576	<u>51.1</u>	<u>69.6</u>	50.8	70.1	51.5	69.1
362.fma3d	513	<u>104</u>	<u>36.5</u>	104	36.5	104	36.5	567	<u>102</u>	<u>37.3</u>	102	37.3	102	37.4
363.swim	513	51.7	87.6	<u>51.8</u>	<u>87.4</u>	52.0	87.0	288	<u>44.7</u>	<u>101</u>	44.6	102	44.8	101
367.imagick	513	<u>64.8</u>	<u>108</u>	64.6	109	64.9	108	540	<u>65.0</u>	<u>108</u>	64.3	109	66.2	106
370.mgrid331	513	58.9	75.0	<u>59.0</u>	<u>74.9</u>	59.0	74.9	256	<u>52.3</u>	<u>84.5</u>	52.3	84.6	52.5	84.2
371.applu331	513	<u>113</u>	<u>53.9</u>	113	53.7	112	53.9	513	<u>113</u>	<u>53.9</u>	113	53.7	112	53.9
372.smithwa	513	<u>26.0</u>	<u>206</u>	26.0	207	26.0	206	576	23.5	228	23.6	227	<u>23.5</u>	<u>228</u>
376.kdtree	513	57.8	77.9	57.4	78.4	<u>57.5</u>	<u>78.2</u>	549	57.9	77.7	56.7	79.4	<u>57.4</u>	<u>78.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
COPTIMIZE=-O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp -ansi-alias -mcmmodel=medium -shared-intel
CXXOPTIMIZE=-O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp -ansi-alias -mcmmodel=medium -shared-intel
FOPTIMIZE=-O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp -mcmmodel=medium -shared-intel
```

Submit Notes

The config file option 'submit' was used.
 For all benchmarks threads were bound to cores using the following submit command:
 dplace \$command
 This binds threads in order of creation, beginning with the master thread on logical cpu 0, the first slave thread on logical cpu 1, and so on.

Operating System Notes

Transparent Hugepages :
 Transparent Hugepages are disabled by
 echo never > /sys/kernel/mm/transparent_hugepage/enabled

Software Environment:

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

SPECompG_peak2012 = 90.9

Superdome Flex (Intel Xeon Gold 6154, 3.00 GHz)

SPECompG_base2012 = 85.2

OMP2012 license:l

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Operating System Notes (Continued)

```
export KMP_AFFINITY=disabled
export KMP_STACKSIZE=200M
export KMP_SCHEDULE=static,balanced
export OMP_DYNAMIC=FALSE
ulimit -s unlimited
```

The tmpfs filesystem was set up with:

```
mount -t tmpfs -o rw,remount,mode=1777,mpol=interleave tmpfs /dev/shm
```

Platform Notes

Rack Management Controller setting:

```
modify npar pnun=0 ras=hpc
```

Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Base Portability Flags

```
350.md: -free
367.imagick: -std=c99
```

Base Optimization Flags

C benchmarks:

```
-O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp -ansi-alias
-mcmodel=medium -shared-intel
```

C++ benchmarks:

```
-O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp -ansi-alias
-mcmodel=medium -shared-intel
```

Fortran benchmarks:

```
-O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp
-mcmodel=medium -shared-intel
```



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

SPECompG_peak2012 = 90.9

Superdome Flex (Intel Xeon Gold 6154, 3.00 GHz)

SPECompG_base2012 = 85.2

OMP2012 license:l

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

350.md: -free
367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp
-ansi-alias -mcmmodel=medium -shared-intel

358.botsalgn: basepeak = yes

359.botsspar: Same as 352.nab

367.imagick: Same as 352.nab

372.smithwa: Same as 352.nab

C++ benchmarks:

-O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp -ansi-alias
-mcmmodel=medium -shared-intel

Fortran benchmarks:

350.md: -O3 -qopt-zmm-usage=high -xCORE-AVX512 -ipol -qopenmp
-mcmmodel=medium -shared-intel

351.bwaves: Same as 350.md

357.bt331: Same as 350.md

360.ilbdc: Same as 350.md

362.fma3d: Same as 350.md

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

SPECompG_peak2012 = 90.9

Superdome Flex (Intel Xeon Gold 6154, 3.00 GHz)

SPECompG_base2012 = 85.2

OMP2012 license:l

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

363.swim: Same as 350.md

370.mgrid331: Same as 350.md

371.applu331: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/HPE-OMP2012-ic18.html>

http://www.spec.org/omp2012/flags/HPE-Superdome_Flex-RevA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/omp2012/flags/HPE-OMP2012-ic18.xml>

http://www.spec.org/omp2012/flags/HPE-Superdome_Flex-RevA.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v25.
Report generated on Wed Jan 3 13:04:52 2018 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 3 January 2018.