



# SPEC® OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8280, 2.70 GHz)

SPECompG\_peak2012 = Not Run

SPECompG\_base2012 = 12.0

OMP2012 license:9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Mar-2019

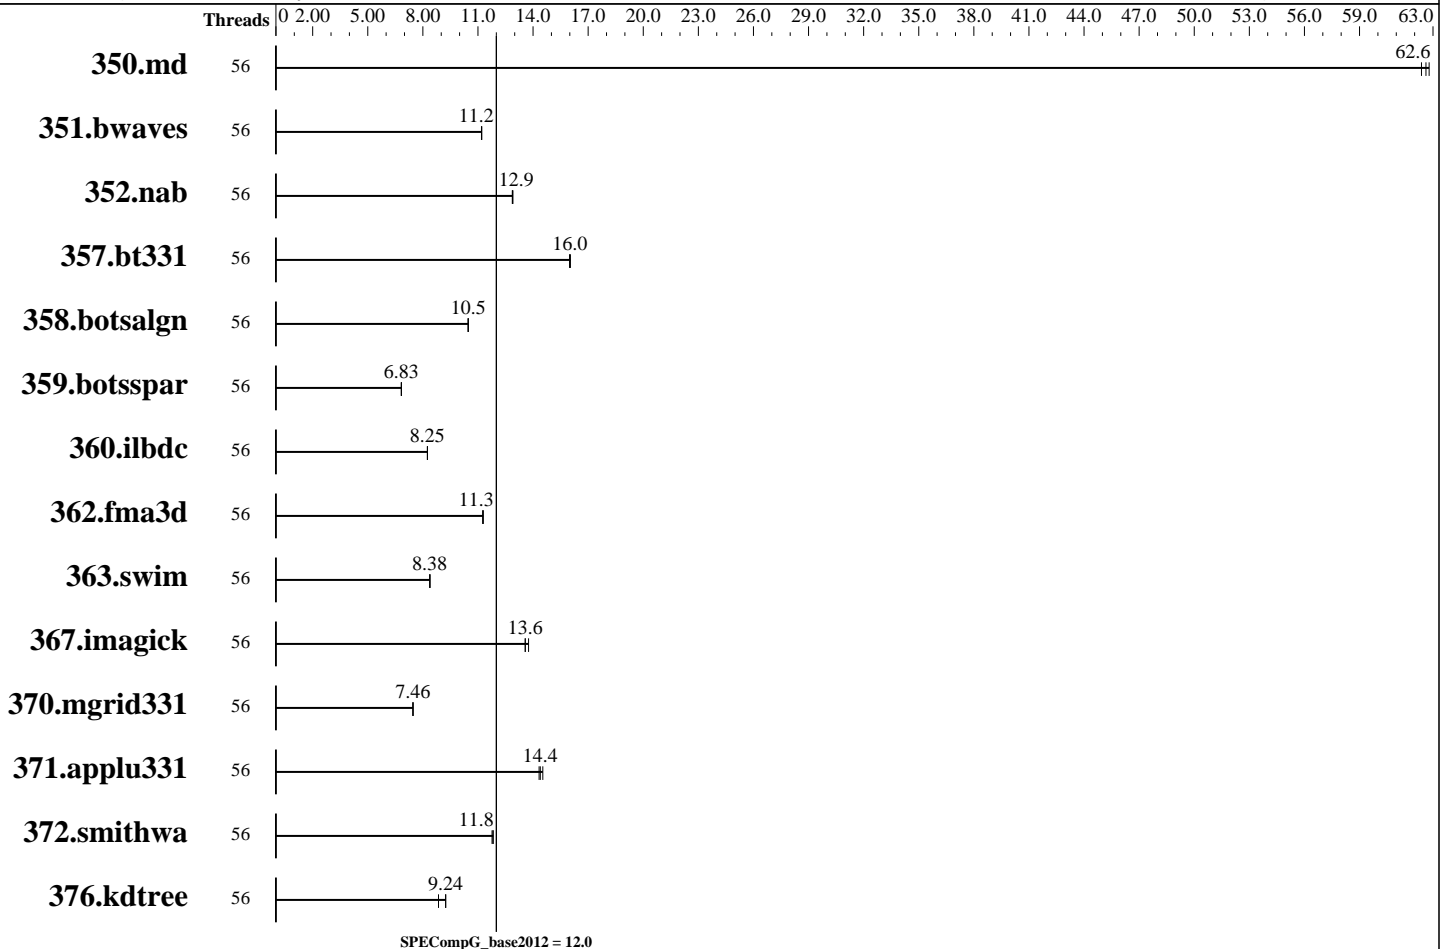

### Hardware

CPU Name: Intel Xeon Platinum 8280  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 2700  
 CPU MHz Maximum: 4000  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 1 chip, 28 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 Chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 382 GB (12 x 32 GB 2Rx4 PC4-2933V-R)  
 Disk Subsystem: 1 X 480 GB SSD SAS  
 Other Hardware: None  
 Base Threads Run: 56  
 Minimum Peak Threads: --

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 15 (x86\_64)  
 Compiler: C/C++/Fortran: Version 19.0.1.144 of Intel Composer for Linux Build 20181018  
 Auto Parallel: No  
 File System: btrfs  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None



# SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8280, 2.70 GHz)

SPECompG\_peak2012 = Not Run

SPECompG\_base2012 = 12.0

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Mar-2019

Maximum Peak Threads: --

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	56	74.2	62.4	<b><u>73.9</u></b>	<b><u>62.6</u></b>	73.7	62.8							
351.bwaves	56	<b><u>404</u></b>	<b><u>11.2</u></b>	404	11.2	405	11.2							
352.nab	56	302	12.9	301	12.9	<b><u>302</u></b>	<b><u>12.9</u></b>							
357.bt331	56	296	16.0	296	16.0	<b><u>296</u></b>	<b><u>16.0</u></b>							
358.botsalgn	56	415	10.5	415	10.5	<b><u>415</u></b>	<b><u>10.5</u></b>							
359.botsspar	56	<b><u>769</u></b>	<b><u>6.83</u></b>	769	6.83	768	6.84							
360.ilbdc	56	431	8.25	432	8.25	<b><u>432</u></b>	<b><u>8.25</u></b>							
362.fma3d	56	338	11.3	<b><u>337</u></b>	<b><u>11.3</u></b>	337	11.3							
363.swim	56	540	8.39	<b><u>541</u></b>	<b><u>8.38</u></b>	541	8.38							
367.imagick	56	518	13.6	<b><u>518</u></b>	<b><u>13.6</u></b>	511	13.8							
370.mgrid331	56	592	7.47	593	7.46	<b><u>592</u></b>	<b><u>7.46</u></b>							
371.applu331	56	417	14.5	<b><u>421</u></b>	<b><u>14.4</u></b>	423	14.3							
372.smithwa	56	<b><u>453</u></b>	<b><u>11.8</u></b>	456	11.8	453	11.8							
376.kdtree	56	<b><u>487</u></b>	<b><u>9.24</u></b>	487	9.25	508	8.85							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

```

Sysinfo program /home/OMP2012/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on linux-8ofr Tue Mar 12 10:36:14 2019

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
1 "physical id"s (chips)
56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
cache size : 39424 KB

```

```

From /proc/meminfo
MemTotal: 394840428 kB

```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8280, 2.70 GHz)

SPECompG\_peak2012 = Not Run

SPECompG\_base2012 = 12.0

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Mar-2019

### Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux linux-8ofr 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018
(cd0437b) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 11 21:06

```
SPEC is set to: /home/OMP2012
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 222G 53G 168G 24% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C240M5.4.0.3.34.0301190218 03/01/2019

Memory:  
12x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933 MT/s, configured at 2934 MT/s  
12x NO DIMM NO DIMM

(End of data from sysinfo program)

### General Notes

```
=====
BIOS settings notes:
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
BIOS settings notes:
Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
Power Performance Tuning set to OS
Sub Numa Clustering (SNC) set to Disabled
IMC Interleaving set to Auto
General OMP Library Settings
ENV_KMP_LIBRARY=turnaround
```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8280, 2.70 GHz)

SPECompG\_peak2012 = Not Run

SPECompG\_base2012 = 12.0

OMP2012 license:9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Mar-2019

### General Notes (Continued)

```
ENV_OMP_SCHEDULE=static
ENV_KMP_BLOCKTIME=200
ENV_KMP_STACKSIZE=702M
ENV_OMP_DYNAMIC=FALSE
ENV_OMP_NESTED=FALSE
```

```
=====
General base OMP Library Settings
ENV_KMP_AFFINITY=compact,1
=====
```

#### Spectre and Meltdown

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

### Base Portability Flags

```
350.md: -FR
357.bt331: -mmodel=medium
363.swim: -mmodel=medium
367.imagick: -std=c99
```

### Base Optimization Flags

C benchmarks:  
-O3 -qopenmp -ipo -xCORE-AVX512 -ansi-alias

C++ benchmarks:  
-O3 -qopenmp -ipo -xCORE-AVX512 -ansi-alias

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8280, 2.70 GHz)

SPECompG\_peak2012 = Not Run

SPECompG\_base2012 = 12.0

**OMP2012 license:**9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Mar-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-O3 -qopenmp -ipo -xCORE-AVX512 -align array64byte`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic19.0-linux64.html>

<http://www.spec.org/omp2012/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/omp2012/flags/Intel-ic19.0-linux64.xml>

<http://www.spec.org/omp2012/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC OMP2012 v1.1.  
Report generated on Wed May 1 12:07:47 2019 by SPEC OMP2012 PS/PDF formatter v541.  
Originally published on 30 April 2019.