



SPEC® OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, 2.3 Ghz)

SPECompG_peak2012 = 43.8

SPECompG_base2012 = 36.9

OMP2012 license:13


Test sponsor: Intel

Tested by: Intel

Test date: Jun-2019

Hardware Availability: Jun-2019

Software Availability: Jan-2019

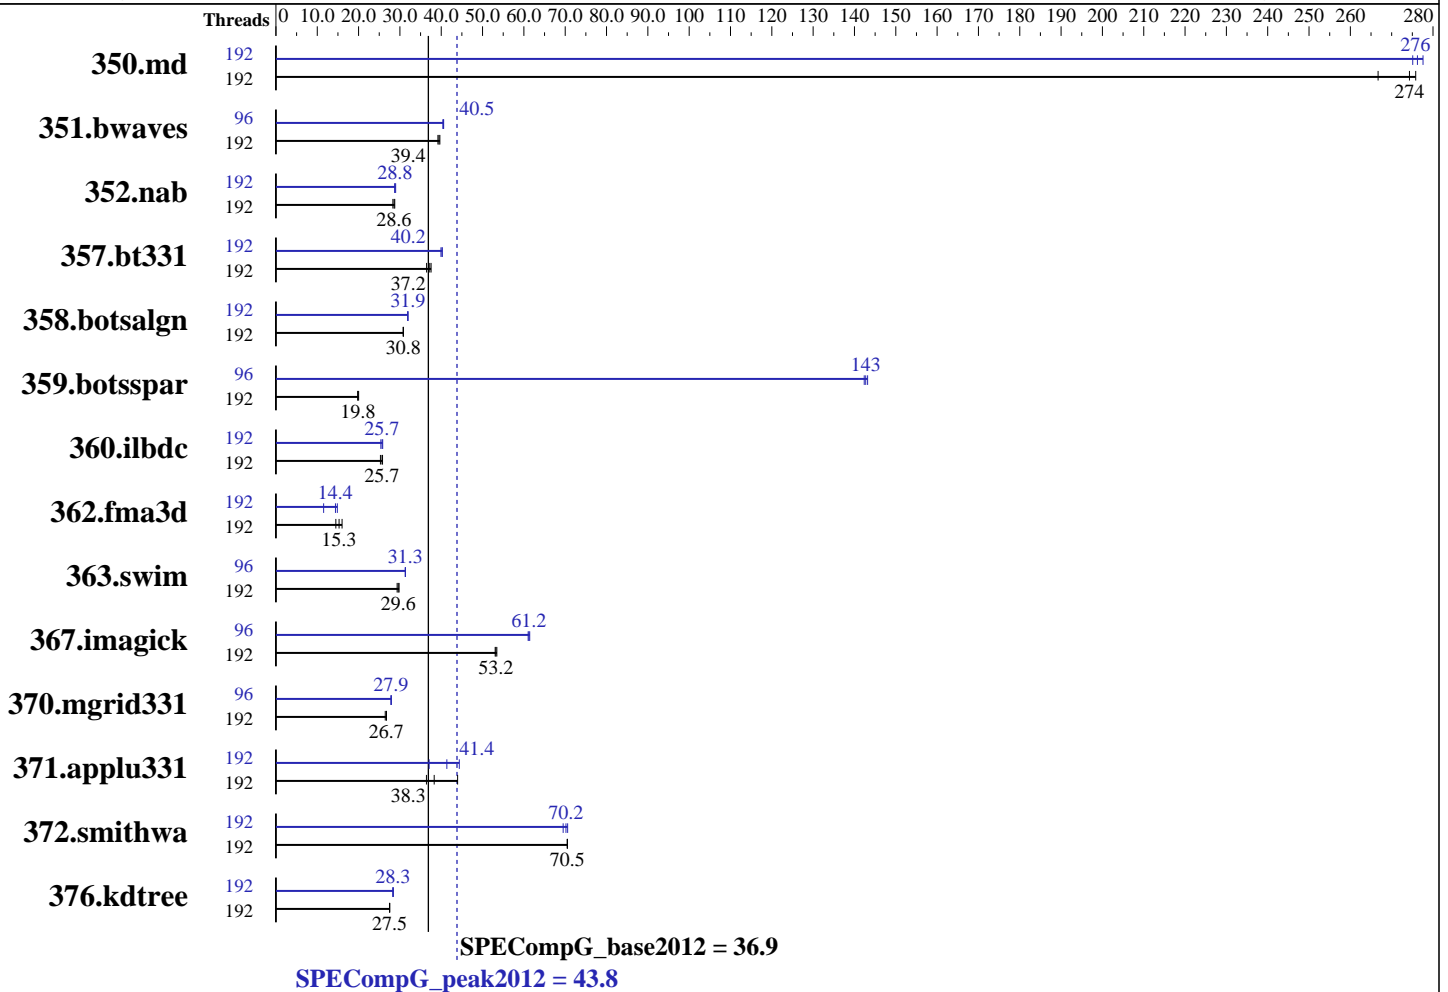

Hardware

CPU Name: Intel Xeon Platinum 9242
 CPU Characteristics: Intel Turbo Boost Technology : Up to 3.80 Ghz
 CPU MHz: 2200
 CPU MHz Maximum: 3800
 FPU: Integrated
 CPU(s) enabled: 96 cores, 2 chips, 48 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 Chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 71.5 MB I+D on chip per chip, 35.75 MB shared / 24 cores
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 DDR4-2993Y-R)
 Disk Subsystem: N/A
 Other Hardware: --
 Base Threads Run: 192

Continued on next page

Software

Operating System: CentOS Linux release 7.6.1810 (Core)
 Compiler: C/C++/Fortran: Version 19.0.2.187 of Intel Composer XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run Level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: None



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, 2.3 Ghz)

SPECompG_peak2012 = 43.8

SPECompG_base2012 = 36.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Jun-2019

Hardware Availability: Jun-2019

Software Availability: Jan-2019

Minimum Peak Threads: 96
Maximum Peak Threads: 192

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	192	<u>16.9</u>	<u>274</u>	17.4	267	16.8	276	192	16.7	278	<u>16.8</u>	<u>276</u>	16.8	275
351.bwaves	192	114	39.7	116	39.2	<u>115</u>	<u>39.4</u>	96	112	40.6	112	40.4	<u>112</u>	<u>40.5</u>
352.nab	192	<u>136</u>	<u>28.6</u>	137	28.3	135	28.8	192	<u>135</u>	<u>28.8</u>	135	28.7	134	29.0
357.bt331	192	130	36.5	126	37.5	<u>127</u>	<u>37.2</u>	192	<u>118</u>	<u>40.2</u>	118	40.2	119	39.9
358.botsalgn	192	<u>141</u>	<u>30.8</u>	141	30.8	141	30.8	192	<u>136</u>	<u>31.9</u>	136	31.9	136	31.9
359.botsspar	192	262	20.0	<u>265</u>	<u>19.8</u>	265	19.8	96	36.7	143	36.9	142	<u>36.8</u>	<u>143</u>
360.ilbdc	192	138	25.8	<u>139</u>	<u>25.7</u>	141	25.3	192	140	25.4	<u>139</u>	<u>25.7</u>	138	25.8
362.fma3d	192	262	14.5	<u>249</u>	<u>15.3</u>	237	16.0	192	256	14.9	329	11.5	<u>264</u>	<u>14.4</u>
363.swim	192	<u>153</u>	<u>29.6</u>	154	29.3	152	29.8	96	<u>145</u>	<u>31.3</u>	145	31.3	145	31.3
367.imagick	192	133	53.1	<u>132</u>	<u>53.2</u>	132	53.5	96	<u>115</u>	<u>61.2</u>	114	61.4	115	61.0
370.mgrid331	192	165	26.8	<u>165</u>	<u>26.7</u>	167	26.5	96	<u>159</u>	<u>27.9</u>	159	27.9	158	27.9
371.applu331	192	138	44.0	166	36.4	<u>158</u>	<u>38.3</u>	192	163	37.1	<u>147</u>	<u>41.4</u>	137	44.4
372.smithwa	192	<u>76.0</u>	<u>70.5</u>	76.0	70.6	76.0	70.5	192	75.9	70.6	77.1	69.5	<u>76.4</u>	<u>70.2</u>
376.kdtree	192	164	27.5	163	27.5	<u>163</u>	<u>27.5</u>	192	158	28.4	159	28.3	<u>159</u>	<u>28.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

The system used pre-release CPUs running at 2200 MHz instead of the nominal base frequency (2300 MHz).
Sysinfo program /nfs/pdx/home/aknyazel/OMP2012/1.1/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on ortce-clxap2 Tue Jun 4 08:41:42 2019

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Genuine Intel(R) CPU 0000#@
 4 "physical id"s (chips)
 192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, 2.3 Ghz)

SPECompG_peak2012 = 43.8

SPECompG_base2012 = 36.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Jun-2019

Hardware Availability: Jun-2019

Software Availability: Jan-2019

Platform Notes (Continued)

physical 2: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27
28 29

cache size : 36608 KB

From /proc/meminfo

MemTotal: 394795892 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

centos-release: CentOS Linux release 7.6.1810 (Core)

centos-release-upstream: Derived from Red Hat Enterprise Linux 7.6 (Source)

os-release:

NAME="CentOS Linux"

VERSION="7 (Core)"

ID="centos"

ID_LIKE="rhel fedora"

VERSION_ID="7"

PRETTY_NAME="CentOS Linux 7 (Core)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:centos:centos:7"

redhat-release: CentOS Linux release 7.6.1810 (Core)

system-release: CentOS Linux release 7.6.1810 (Core)

system-release-cpe: cpe:/o:centos:centos:7

uname -a:

Linux ortce-clxap2 3.10.0-957.10.1.el7.x86_64 #1 SMP Mon Mar 18 15:06:45 UTC
2019 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 25 12:54

SPEC is set to: /nfs/pdx/home/aknyazel/OMP2012/1.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
------------	------	------	------	-------	------	------------

cthor-fs1.jf.intel.com:/home/aknyazel	nfs	29T	16T	13T	55%	
---------------------------------------	-----	-----	-----	-----	-----	--

/nfs/pdx/home/aknyazel

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, 2.3 Ghz)

SPECompG_peak2012 = 43.8

SPECompG_base2012 = 36.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Jun-2019

Hardware Availability: Jun-2019

Software Availability: Jan-2019

General Notes

=====
General base OMP Library Settings

ENV_KMP_AFFINITY=compact,0,granularity=fine,verbose

=====
General peak OMP Library Settings

ENV_KMP_AFFINITY=compact,0,granularity=fine,verbose

=====
Per benchmark peak OMP Library Settings

=====
System settings notes:

Intel Turbo Boost Technology (Turbo) : Enabled

=====
General OMP Library Settings

KMP_LIBRARY=turnaround

KMP_STACKSIZE=292M

KMP_BLOCKTIME=infinite

OMP_DYNAMIC=FALSE

OMP_NESTED=FALSE

OMP_SCHEDULE=static

Spectre and Meltdown

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

=====
351.bwaves:peak:

ENV_KMP_AFFINITY=compact,1,granularity=fine,verbose

=====
359.botsspar:peak:

ENV_KMP_AFFINITY=compact,1,granularity=fine,verbose

=====
363.swim:peak:

ENV_KMP_AFFINITY=compact,1,granularity=fine,verbose

=====
367.imagick:peak:

ENV_KMP_AFFINITY=compact,1,granularity=fine,verbose

=====
370.mgrid331:peak:

ENV_KMP_AFFINITY=compact,1,granularity=fine,verbose

=====
Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, 2.3 Ghz)

SPECompG_peak2012 = 43.8

SPECompG_base2012 = 36.9

OMP2012 license:13
Test sponsor: Intel
Tested by: Intel

Test date: Jun-2019
Hardware Availability: Jun-2019
Software Availability: Jan-2019

General Notes (Continued)

371.applu331:peak:
Compiler: Fortran: Version 19.0.3.199 of Intel Composer XE for Linux

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -FR
357.bt331: -mmodel=medium
363.swim: -mmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0

C++ benchmarks:
-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0

Fortran benchmarks:
-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0
-align all

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, 2.3 Ghz)

SPECompG_peak2012 = 43.8

SPECompG_base2012 = 36.9

OMP2012 license:13
Test sponsor: Intel
Tested by: Intel

Test date: Jun-2019
Hardware Availability: Jun-2019
Software Availability: Jan-2019

Peak Compiler Invocation (Continued)

Fortran benchmarks (except as noted below):

ifort

371.applu331: /opt/intel/compilers_and_libraries_2019.3.199/linux/bin/intel64/ifort

Peak Portability Flags

350.md: -FR
357.bt331: -mcmmodel=medium
363.swim: -mcmmodel=medium
367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -ansi-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=0

358.botsalgn: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt

359.botsspar: Same as 358.botsalgn

367.imagick: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -ipo

372.smithwa: Same as 352.nab

C++ benchmarks:

-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-fno-alias -no-prec-div -no-prec-sqrt -qopt-prefetch=1

Fortran benchmarks:

350.md: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -ansi-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=0 -align all

351.bwaves: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=2 -align all

357.bt331: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=1 -align all

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System S9248WK1HLC (2 x Intel Xeon 9242 Platinum, 2.3 Ghz)

SPECompG_peak2012 = 43.8

SPECompG_base2012 = 36.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Jun-2019

Hardware Availability: Jun-2019

Software Availability: Jan-2019

Peak Optimization Flags (Continued)

360.ilbdc: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=4 -align all

362.fma3d: Same as 357.bt331

363.swim: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -no-prec-div -no-prec-sqrt -fno-alias
-qopt-malloc-options=3 -ipo -qopt-prefetch=0 -align all

370.mgrid331: -O3 -qopenmp -xCORE-AVX2 -fp-model fast=2 -no-prec-div
-no-prec-sqrt -fno-alias -qopt-malloc-options=3 -ipo
-qopt-prefetch=0 -align all

371.aplu331: Same as 350.md

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic19-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Intel-ic19-linux64.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.
Report generated on Wed Jul 31 16:13:35 2019 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 3 July 2019.