



# SPEC® OMPG2012 Result

Copyright 2012-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

### SPECompG\_peak2012 = 93.6

### ThinkSystem SR665V3(AMD EPYC 9754, 2.25GHz)

### SPECompG\_base2012 = 91.6

OMP2012 license:28


Test date: May-2023

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Aug-2023

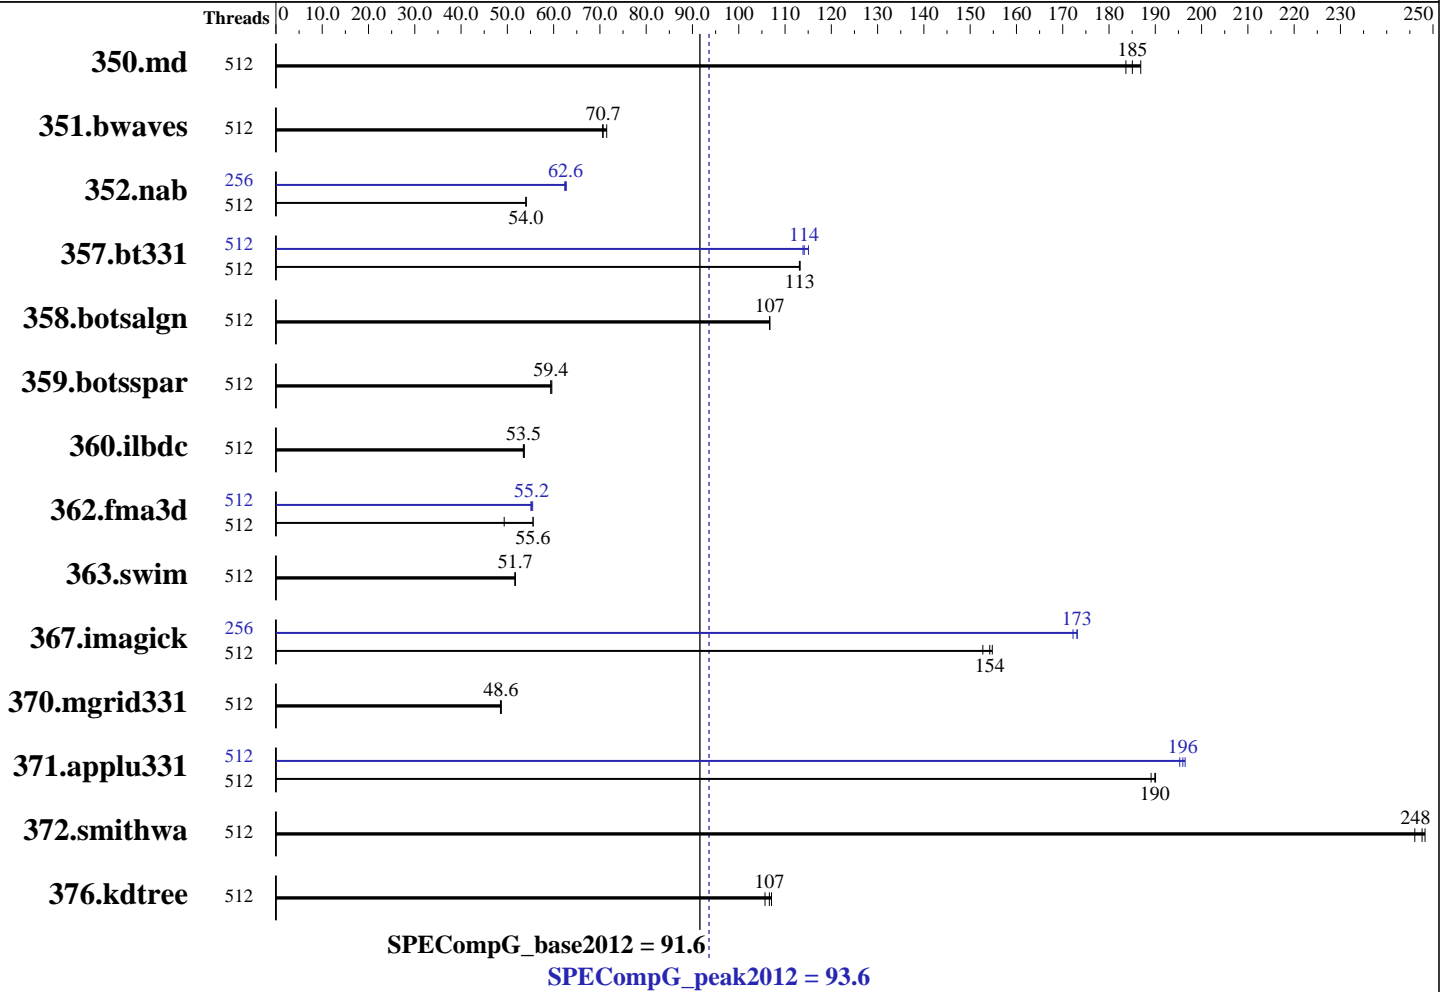

### Hardware

CPU Name: AMD EPYC 9754  
 CPU Characteristics: Max Boost Clock up to 3.1 GHz  
 CPU MHz: 2250  
 CPU MHz Maximum: 3100  
 FPU: Integrated  
 CPU(s) enabled: 256 cores, 2 chips, 128 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 256 MB I+D on chip per chip, 32 MB shared 8 cores  
 Other Cache: None  
 Memory: 768 GB ( 24 x 32 GB 2Rx4 PC5-4800B-R)  
 Disk Subsystem: 1 x 1 TB SATA Hard Drive  
 Other Hardware: None  
 Base Threads Run: 512  
 Minimum Peak Threads: 256

Continued on next page

### Software

Operating System: SUSE Linux Enterprise for High-Performance Computing 15 SP4(x86\_64), Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 2022.2.0.191 of Intel oneAPI DPC/C++  
 Auto Parallel: No  
 File System: xfs  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other Software: None



# SPEC OMPG2012 Result

Copyright 2012-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG\_peak2012 = 93.6

ThinkSystem SR665V3(AMD EPYC 9754, 2.25GHz)

SPECompG\_base2012 = 91.6

OMP2012 license:28

Test date: May-2023

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Aug-2023

Maximum Peak Threads: 512

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	512	24.8	187	<u>25.0</u>	<u>185</u>	25.2	184	512	24.8	187	<u>25.0</u>	<u>185</u>	25.2	184
351.bwaves	512	64.2	70.6	<u>64.1</u>	<u>70.7</u>	63.4	71.5	512	64.2	70.6	<u>64.1</u>	<u>70.7</u>	63.4	71.5
352.nab	512	71.9	54.1	<u>72.0</u>	<u>54.0</u>	72.0	54.0	256	<u>62.2</u>	<u>62.6</u>	62.0	62.7	62.3	62.4
357.bt331	512	41.9	113	<u>41.9</u>	<u>113</u>	41.9	113	512	<u>41.5</u>	<u>114</u>	41.2	115	41.6	114
358.botsalgn	512	40.8	107	40.8	107	<u>40.8</u>	<u>107</u>	512	40.8	107	40.8	107	<u>40.8</u>	<u>107</u>
359.botsspar	512	88.1	59.6	88.4	59.4	<u>88.4</u>	<u>59.4</u>	512	88.1	59.6	88.4	59.4	<u>88.4</u>	<u>59.4</u>
360.ilbdc	512	66.3	53.7	<u>66.5</u>	<u>53.5</u>	66.6	53.5	512	66.3	53.7	<u>66.5</u>	<u>53.5</u>	66.6	53.5
362.fma3d	512	68.4	55.6	77.0	49.3	<u>68.4</u>	<u>55.6</u>	512	68.5	55.5	<u>68.8</u>	<u>55.2</u>	69.0	55.1
363.swim	512	87.6	51.7	<u>87.6</u>	<u>51.7</u>	87.7	51.6	512	87.6	51.7	<u>87.6</u>	<u>51.7</u>	87.7	51.6
367.imagick	512	46.0	153	<u>45.6</u>	<u>154</u>	45.4	155	256	<u>40.6</u>	<u>173</u>	40.6	173	40.8	172
370.mgrid331	512	90.8	48.7	91.1	48.5	<u>90.9</u>	<u>48.6</u>	512	90.8	48.7	91.1	48.5	<u>90.9</u>	<u>48.6</u>
371.applu331	512	<u>31.9</u>	<u>190</u>	32.0	189	31.9	190	512	<u>30.9</u>	<u>196</u>	31.0	195	30.8	196
372.smithwa	512	21.6	248	<u>21.6</u>	<u>248</u>	21.8	246	512	21.6	248	<u>21.6</u>	<u>248</u>	21.8	246
376.kdtree	512	<u>42.2</u>	<u>107</u>	42.6	106	42.0	107	512	<u>42.2</u>	<u>107</u>	42.6	106	42.0	107

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Sysinfo program /home/omp2012/Docs/sysinfo  
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)  
running on Kauai-BergamoA2-2P Wed May 17 09:12:22 2023

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9754 128-Core Processor
 2 "physical id"s (chips)
 512 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 128
siblings  : 256
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 28 29 30 31 32 33
34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58
59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123
124 125 126 127
```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG\_peak2012 = 93.6

ThinkSystem SR665V3(AMD EPYC 9754, 2.25GHz)

SPECompG\_base2012 = 91.6

OMP2012 license:28

Test date: May-2023

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Aug-2023

## Platform Notes (Continued)

```

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 28 29 30 31 32 33
34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58
59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123
124 125 126 127
cache size : 1024 KB

```

From /proc/meminfo

```

MemTotal:      792086708 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="SLE_HPC"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise High Performance Computing 15 SP4"
ID="sle_hpc"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sle_hpc:15:sp4"

```

uname -a:

```

Linux Kauai-BergamoA2-2P 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed
May 11 06:57:18 UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 17 07:35

SPEC is set to: /home/omp2012

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        xfs       32G   12G   21G   37% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo KAE1111I-2.10 05/06/2023

Memory:

24x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800 MT/s

(End of data from sysinfo program)

## General Notes

General OMP Library Settings

OMP\_DYNAMIC = FALSE

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org  
http://www.spec.org/

Page 3



# SPEC OMPG2012 Result

Copyright 2012-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG\_peak2012 = 93.6

ThinkSystem SR665V3(AMD EPYC 9754, 2.25GHz)

SPECompG\_base2012 = 91.6

OMP2012 license:28

Test date: May-2023

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Aug-2023

## General Notes (Continued)

```
OMP_THREADS = 512
KMP_SCHEDULE = static
KMP_LIBRARY = turnaround
KMP_STACKSIZE = 768M
KMP_BLOCKTIME = infinite
KMP_AFFINITY = granularity=fine,proclist=[0-7,8-15,16-23,24-31,32-39,
40-47,48-55,56-63,64-71,72-79,80-87,88-95,96-103,104-111,112-119,120-127,
128-135,136-143,144-151,152-159,160-167,168-175,176-183,184-191,192-199,
200-207,208-215,216-223,224-231,232-239,240-247,248-255,256-263,264-271,
272-279,280-287,288-295,296-303,304-311,312-319,320-327,328-335,336-343,
344-351,352-359,360-367,368-375,376-383,384-391,392-399,400-407,408-415,
416-423,424-431,432-439,440-447,448-455,456-463,464-471,472-479,480-487,
488-495,496-503,504-511],explicit
```

### uEFI Setting notes:

Choose "Maximum Performance" operating mode and changed to "Custom" operating mode. Below items also configured:

- 
- NUMA Nodes per Socket = NPS2
- DRAM Scrub Time = Disabled
- CPPC = Disabled
- 
- 
- 

Yes: The test sponsor attests, as of date of publication, the CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, the CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Spectre variant 2) is mitigated in the system as tested and documented.

OS tuning:  
ulimit -s unlimited

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx



# SPEC OMPG2012 Result

Copyright 2012-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG\_peak2012 = 93.6

ThinkSystem SR665V3(AMD EPYC 9754, 2.25GHz)

SPECompG\_base2012 = 91.6

OMP2012 license:28

Test date: May-2023

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Aug-2023

## Base Portability Flags

350.md: -FR  
357.bt331: -mcmmodel=medium  
363.swim: -mcmmodel=medium  
367.imagick: -std=c99

## Base Optimization Flags

C benchmarks:

-Ofast -fopenmp -march=core-avx2 -fma -ipo -ansi-alias  
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles  
-qopt-zmm-usage=high -ffast-math -fstrict-enums  
-fstrict-vtable-pointers -fvirtual-function-elimination

C++ benchmarks:

-Ofast -fopenmp -march=core-avx2 -fma -ipo -ansi-alias  
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles  
-qopt-zmm-usage=high -ffast-math -fstrict-enums  
-fstrict-vtable-pointers

Fortran benchmarks:

-Ofast -fopenmp -march=core-avx2 -fma -ipo -ansi-alias  
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles  
-qopt-zmm-usage=high -align array128byte -ffinite-math-only  
-fno-omit-frame-pointer -m64 -ipol -foptimize-sibling-calls -vec

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

350.md: -FR  
357.bt331: -mcmmodel=medium  
363.swim: -mcmmodel=medium  
367.imagick: -std=c99



# SPEC OMPG2012 Result

Copyright 2012-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG\_peak2012 = 93.6

ThinkSystem SR665V3(AMD EPYC 9754, 2.25GHz)

SPECompG\_base2012 = 91.6

OMP2012 license:28

Test date: May-2023

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Aug-2023

## Peak Optimization Flags

C benchmarks:

352.nab: -Ofast -fopenmp -march=core-avx2 -fma -ipo -ansi-alias  
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles  
-qopt-zmm-usage=high -ffast-math -fstrict-enums  
-fstrict-vtable-pointers -fvirtual-function-elimination

358.botsalgn: basepeak = yes

359.botsspar: basepeak = yes

367.imagick: Same as 352.nab

372.smithwa: basepeak = yes

C++ benchmarks:

376.kdtree: basepeak = yes

Fortran benchmarks:

350.md: basepeak = yes

351.bwaves: basepeak = yes

357.bt331: -Ofast -fopenmp -march=core-avx2 -fma -ipo -ansi-alias  
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles  
-qopt-zmm-usage=high -align array128byte -ffinite-math-only  
-fno-omit-frame-pointer -m64 -ipol -foptimize-sibling-calls  
-vec

360.ilbdc: basepeak = yes

362.fma3d: Same as 357.bt331

363.swim: basepeak = yes

370.mgrid331: basepeak = yes

371.applu331: Same as 357.bt331

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/lenovo-omp2012-oneAPI.20230222.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/lenovo-omp2012-oneAPI.20230222.xml>



# SPEC OMPG2012 Result

Copyright 2012-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG\_peak2012 = 93.6

ThinkSystem SR665V3(AMD EPYC 9754, 2.25GHz)

SPECompG\_base2012 = 91.6

OMP2012 license:28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: May-2023

Hardware Availability: Aug-2023

Software Availability: Aug-2023

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC OMP2012 v1.1.  
Report generated on Tue Jun 13 18:56:28 2023 by SPEC OMP2012 PS/PDF formatter v541.  
Originally published on 13 June 2023.