SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 J200 Multiprocessor

SPECint_rate95 = 64.5

SPECint_rate_base95 = 64.5

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Aug-95	Software Avail: Aug-95

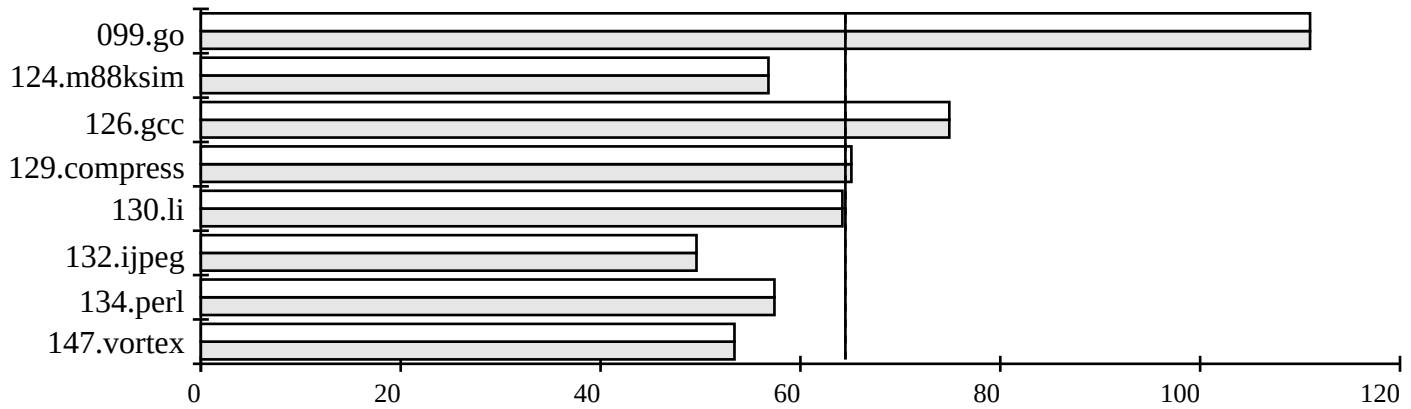

Hardware/Software Configuration for:
HP 9000 J200 Multiprocessor

Hardware

Model Name:	J200 Multiprocessor
CPU:	100 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	2
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	HP92453-01 A.10.13 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	2	747	111	2	747	111
124.m88ksim	2	602	56.8	2	602	56.8
126.gcc	2	409	74.9	2	409	74.9
129.compress	2	498	65.1	2	498	65.1
130.li	2	533	64.2	2	533	64.2
132.ijpeg	2	871	49.6	2	871	49.6
134.perl	2	596	57.4	2	596	57.4
147.vortex	2	910	53.4	2	910	53.4
SPECint_rate_base95 (G. Mean)			64.5			
SPECint_rate95 (G. Mean)						64.5

Notes/Tuning Information

```
Portability:  126.gcc: -DUSG
Linker Flags:  -Wl,-aarchive
Baseline Flags:  +P +Oall +Onoregionsched
+P indicates feedback directed optimization was used.
```