SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Series 700 Model 715/100XC

SPECfp_rate95 = 38.3

SPECfp_base_rate95 = 38.3

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Jun-95	Software Avail: Jan-96

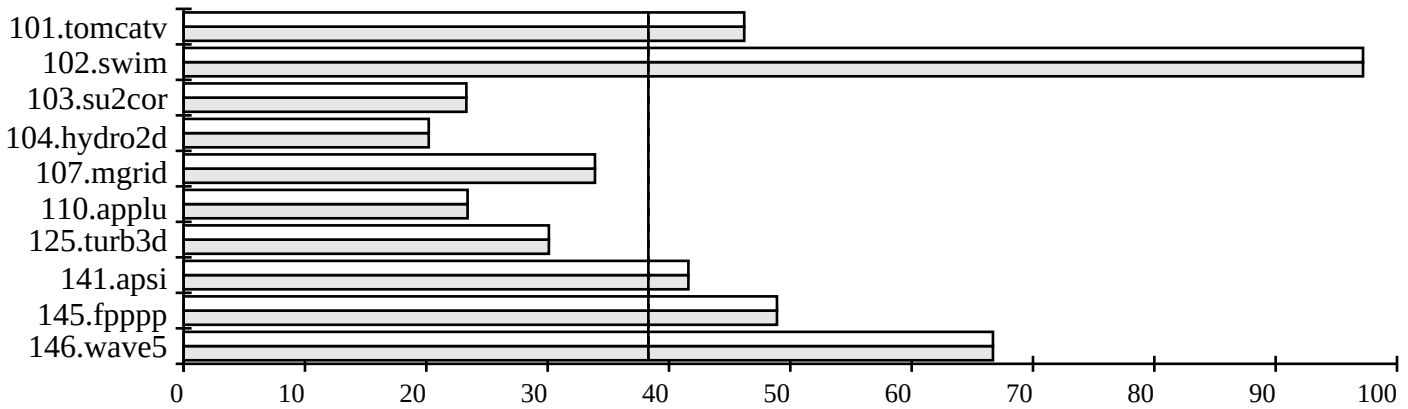

Hardware/Software Configuration for:
HP 9000 Series 700 Model 715/100XC

Hardware

Model Name:	HP 9000 Series 700 Model 715/100XC
CPU:	100 MHz PA-RISC 7100LC
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	1MB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	64MB
Disk Subsystem:	1 SCSI-2 ST32430N 2 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.10
Compiler:	HP FORTRAN B3906AA B.10.00.01.00
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	1	721	46.2	1	721	46.2
102.swim	1	796	97.2	1	796	97.2
103.su2cor	1	540	23.3	1	540	23.3
104.hydro2d	1	1067	20.2	1	1067	20.2
107.mgrid	1	663	33.9	1	663	33.9
110.applu	1	846	23.4	1	846	23.4
125.turb3d	1	1225	30.1	1	1225	30.1
141.apsi	1	455	41.6	1	455	41.6
145.fpppp	1	1767	48.9	1	1767	48.9
146.wave5	1	405	66.7	1	405	66.7
SPECfp_base_rate95 (G. Mean)			38.3			
SPECfp_rate95 (G. Mean)						38.3

Notes/Tuning Information

```
BASE FLAGS:
All: +Oall +Onofastaccess
Linker Flag: All: -Wl,-a,archive

PEAK FLAGS:
Same as BASE FLAGS.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org