SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model J210XC

SPECint95 = 4.64

SPECint_base95 = 4.64

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Jan-96	Hardware Avail: Mar-96	Software Avail: Feb-96

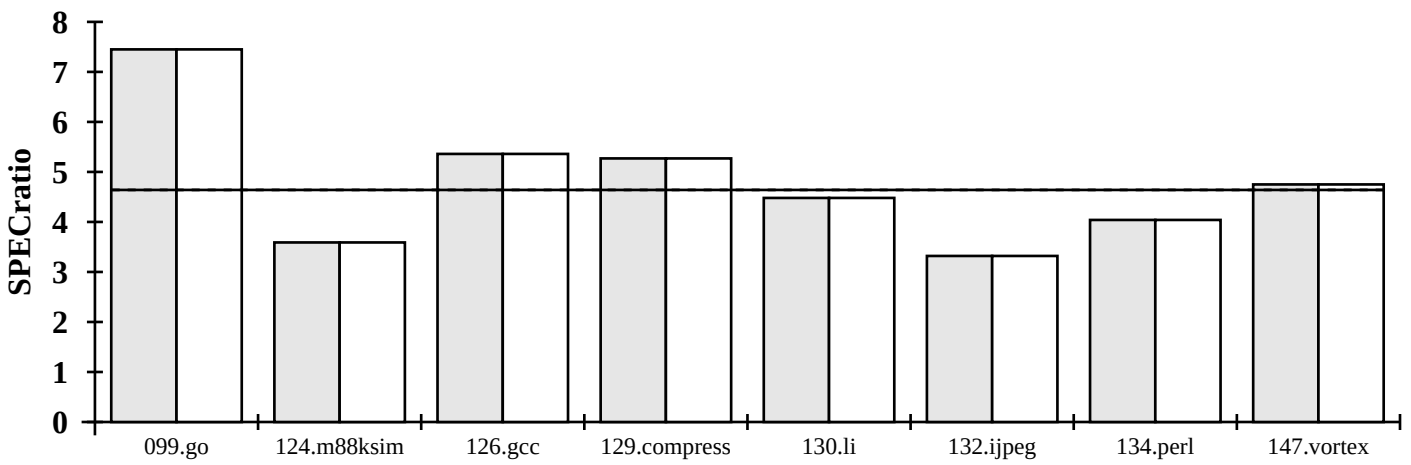

Hardware/Software Configuration for:
HP 9000 Model J210XC

Hardware

Model Name:	HP 9000 Model J210XC
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	1MBI+1MBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	2 HP C2490WD 2 GB
Other Hardware:	None

Software

Operating System:	HP-UX B.10.10
Compiler:	HP92453-01 A.10.30 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	617	7.45	617	7.45
124.m88ksim	1900	529	3.59	529	3.59
126.gcc	1700	317	5.36	317	5.36
129.compress	1800	341	5.27	341	5.27
130.li	1900	425	4.48	425	4.48
132.ijpeg	2400	722	3.32	722	3.32
134.perl	1900	470	4.04	470	4.04
147.vortex	2700	568	4.75	568	4.75
SPECint_base95 (G. Mean)			4.64		
		SPECint95 (G. Mean)			4.64

Notes/Tuning Information

```
PORTABILITY FLAGS:
All: -Ae
126: -Ae -DUSG

BASE FLAGS:
All: +Oall +Oparmsoverlap +P
Linker Flag: All: -Wl,-a,archive

PEAK FLAGS:
Same as BASE FLAGS.

Note: The +P indicates the use of profile based optimization.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org