SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model K410

SPECint_rate95 = 53.3

SPECint_rate_base95 = 48.3

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-96	Hardware Avail: Jan-96	Software Avail: Sep-96

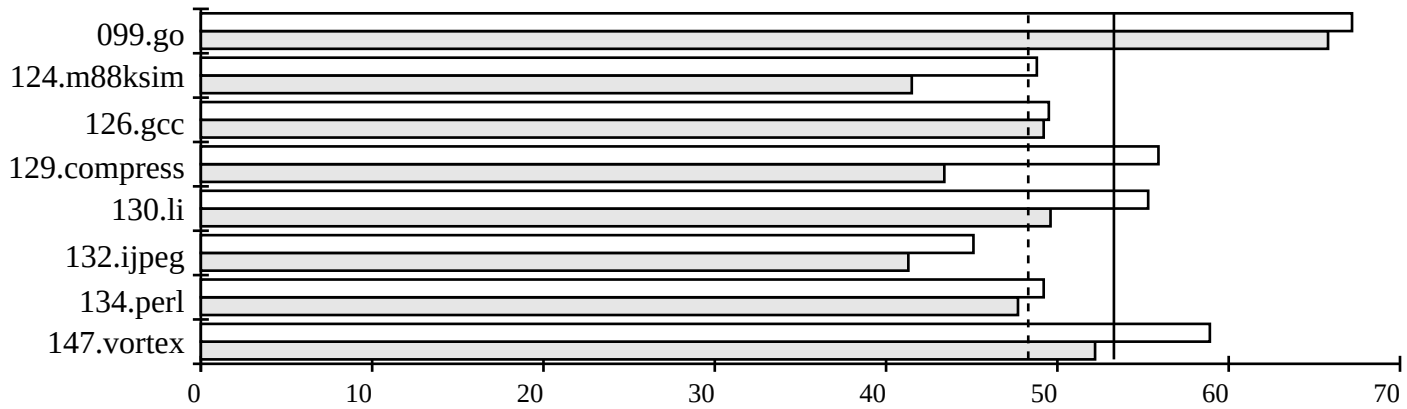

Hardware/Software Configuration for:
HP 9000 Model K410

Hardware

Model Name:	HP 9000 Model K410
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	512MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	None

Software

Operating System:	HP-UX B.10.20
Compiler:	HP C HP92453-01 A.10.32.03
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	629	65.8	1	616	67.2
124.m88ksim	1	412	41.5	1	350	48.8
126.gcc	1	311	49.2	1	309	49.5
129.compress	1	373	43.4	1	290	55.9
130.li	1	345	49.6	1	309	55.3
132.ijpeg	1	523	41.3	1	479	45.1
134.perl	1	358	47.7	1	348	49.2
147.vortex	1	466	52.2	1	413	58.9
SPECint_rate_base95 (G. Mean)			48.3			
SPECint_rate95 (G. Mean)						53.3

Notes/Tuning Information

```
Portability Flags (base & peak): All: -Ae

Base Flags:
All: fastmem.o +Oall +I/+P
Linker Flag:  All: -Wl,-aarchive

Peak Flags:
All: +ESfic +ESlit +O4 +I/+P
099: +Oentrysched +Olibcalls +Onofastaccess +Onolimit +Onoloop_unroll +Optrs_strongly_typed +Ostaticprediction
124: +Oaggressive +Onoparmsoverlap +Optrs_strongly_typed +Ostaticprediction
126: -DSPEC +Olibcalls +Onolimit +Ostaticprediction
129: +Olibcalls +Onofltacc +Onolimit +Optrs_strongly_typed +Owhole_program_mode
130: -lm +ESsfc +Oentrysched +Olibcalls +Onolimit +Onoloop_unroll +Onoptrs_to_globals +Owhole_program_mode
132: +ESsfc +Olibcalls +Onolimit +Optrs_strongly_typed +Owhole_program_mode
134: fastmem.o -lm +Olibcalls +Onolimit +Owhole_program_mode
147: fastmem.o -lm +Oentrysched +Olibcalls +Onolimit +Onoloop_unroll +Optrs_strongly_typed +Ostaticprediction
+Ofltacc +Owhole_program_mode +DC7200
Linker Flag:  All: -Wl,-aarchive

Note: The +I/+P indicates the use of profile based optimization.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org

-- Prepared By: --