SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Intergraph Computer Systems
InterServe 650

SPECint_rate95 = 152

SPECint_rate_base95 = 152

SPEC license # 7	Tested By: Intergraph	Test Date: Aug-97	Hardware Avail: Sep-96	Software Avail: Jun-96

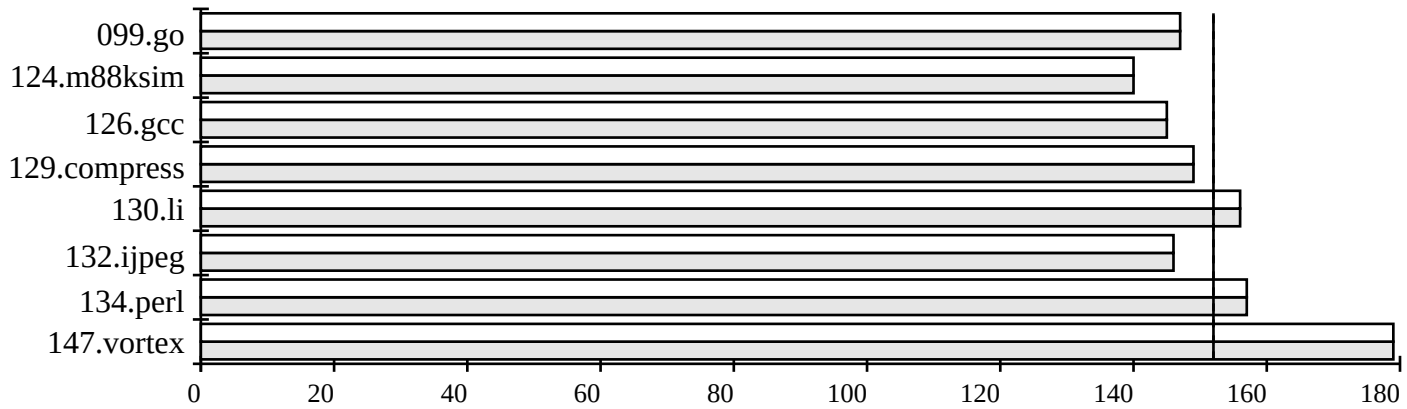

Hardware/Software Configuration for:
InterServe 650

Hardware

Model Name:	InterServe 650
CPU:	200MHz Pentium Pro
FPU:	Integrated
Number of CPU(s):	2
Primary Cache:	8KBI+8KBD
Secondary Cache:	512KB
Other Cache:	None
Memory:	256MB
Disk Subsystem:	3x 4GB Internal RAID
Other Hardware:	100Base-T NIC, InterSite Monitor

Software

Operating System:	Microsoft Windows NT 4.0 (SP1)
Compiler:	Intel C/C++ Compiler Plug-in 2.4
File System:	NTFS
System State:	N/A

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	2	565	147	2	565	147
124.m88ksim	2	245	140	2	245	140
126.gcc	2	212	145	2	212	145
129.compress	2	217	149	2	217	149
130.li	2	219	156	2	219	156
132.ijpeg	2	296	146	2	296	146
134.perl	2	218	157	2	218	157
147.vortex	2	271	179	2	271	179
SPECint_rate_base95 (G. Mean)			152			
			SPECint_rate95 (G. Mean)			152

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -G6 -Qipo -Qprof_gen -Qprof_dir c:/temp/IRCDB
Pass2: -G6 -Qipo -Qprof_use -Qprof_dir c:/temp/IRCDB
-prof_dir is a location flag and not an optimization flag
Portability: 124:-DNT -DLEHOST  125: -Qlowercase
Portability: 126: -D__TURBOC__ -D_MSDOS -D__STDC__=0 -DONLY_INT_FIELDS=0 -Dalloca=_alloca -DDeleteFile=remove
Portability: 132: -DMSDOS
Portability: 134: -DMSDOS -DI_TIME
The Intel Compiler 2.4 for Windows NT is shipped with VTune 2.4, see http://developer.intel.com/
Microsoft Visual C++ 5.0 is also installed for libraries
```