



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

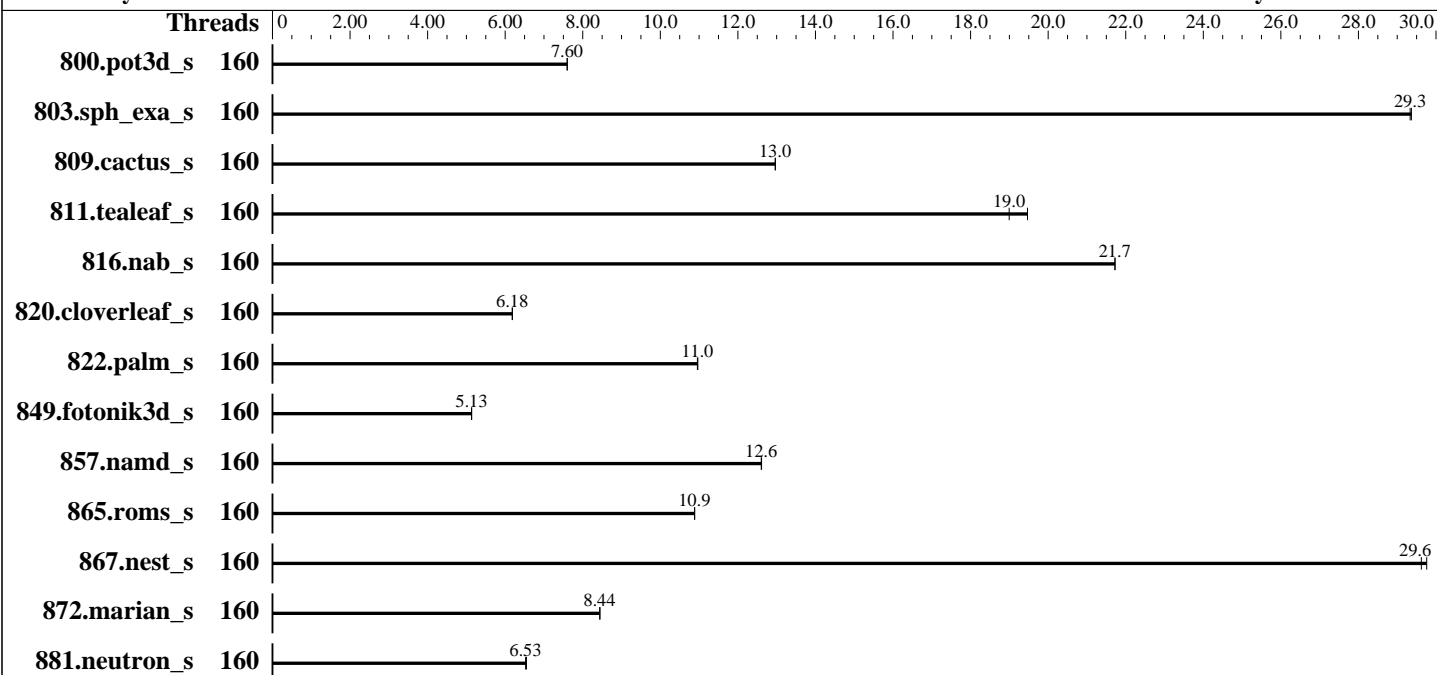

### Hardware

CPU Name: AMD EPYC 9845  
 Max MHz: 3700  
 Nominal: 2100  
 Enabled: 160 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip, 32 MB shared / 16 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)  
 Storage: 120 GB on tmpfs  
 Cooling: Air  
 Other: None

### Software

OS: Ubuntu 24.04.2 LTS  
 6.8.0-85-generic  
 Compiler: C/C++: Version 5.1.0 of AOCC  
 Fortran: Flang v22  
 Compiler Category: Vendor  
 Firmware: Version 1.5.3 released Oct-2025  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECSpeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Jan-2026

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	160	88.5	7.60	<b>88.6</b>	<b>7.60</b>			160	88.5	7.60	<b>88.6</b>	<b>7.60</b>		
803.sph_exa_s	160	<b>42.2</b>	<b>29.3</b>	42.2	29.4			160	<b>42.2</b>	<b>29.3</b>	42.2	29.4		
809.cactus_s	160	86.5	13.0	<b>86.6</b>	<b>13.0</b>			160	86.5	13.0	<b>86.6</b>	<b>13.0</b>		
811.tealeaf_s	160	<b>29.3</b>	<b>19.0</b>	28.6	19.5			160	<b>29.3</b>	<b>19.0</b>	28.6	19.5		
816.nab_s	160	51.8	21.7	<b>51.8</b>	<b>21.7</b>			160	51.8	21.7	<b>51.8</b>	<b>21.7</b>		
820.cloverleaf_s	160	139	6.18	<b>139</b>	<b>6.18</b>			160	139	6.18	<b>139</b>	<b>6.18</b>		
822.palm_s	160	112	11.0	<b>112</b>	<b>11.0</b>			160	112	11.0	<b>112</b>	<b>11.0</b>		
849.fotonik3d_s	160	129	5.13	<b>129</b>	<b>5.13</b>			160	129	5.13	<b>129</b>	<b>5.13</b>		
857.namd_s	160	<b>115</b>	<b>12.6</b>	115	12.6			160	<b>115</b>	<b>12.6</b>	115	12.6		
865.roms_s	160	<b>100</b>	<b>10.9</b>	100	10.9			160	<b>100</b>	<b>10.9</b>	100	10.9		
867.nest_s	160	<b>72.9</b>	<b>29.6</b>	72.6	29.8			160	<b>72.9</b>	<b>29.6</b>	72.6	29.8		
872.marian_s	160	<b>128</b>	<b>8.44</b>	128	8.45			160	<b>128</b>	<b>8.44</b>	128	8.45		
881.neutron_s	160	<b>125</b>	<b>6.53</b>	124	6.55			160	<b>125</b>	<b>6.53</b>	124	6.55		

SPECSpeed®2026\_fp\_base = 11.9

SPECSpeed®2026\_fp\_peak = 11.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>  
Flang v22 is available at <https://flang.llvm.org/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

## Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-159"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib:/mnt
/ramdisk/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04  
 Benchmark run from a 120 GB ramdisk created with the cmd: "mount -t tmpfs -o size=120G tmpfs /mnt/ramdisk"

## Platform Notes

```
BIOS Settings:
  Virtualization Technology : Disabled
    Logical Processor : Disabled
      System Profile : Custom
        CPU Power Management : Maximum Performance
          C-States : Disabled
            Memory Patrol Scrub : Disabled
              PCI ASPM L1 Link Power Management : Disabled
                Periodic Directory Rinse Tuning : Blended
                  Determinism Control : Manual
                    Determinism Slider : Power Determinism
                      Optimizer Mode : Enabled
                        Algorithm Performance Boost Disable : Enabled
                          ApbDis Fixed DF P-State : P0
                            Adaptive Allocation : Enabled
                              Dram Refresh Delay : Performance
```

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

**CPU2026 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on SLR7719-R7715 Fri Feb 6 08:10:46 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

-----  
1. uname -srvm  
Linux 6.8.0-85-generic #85-Ubuntu SMP PREEMPT\_DYNAMIC Thu Sep 18 15:26:59 UTC 2025 x86\_64

-----  
2. w  
08:10:46 up 1:46, 1 user, load average: 62.27, 35.20, 29.06  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 06:25 1:41m 3.04s 1.48s /bin/bash  
./amd\_speed\_aocc510\_flang22\_znver5\_A1.sh

-----  
3. Username  
From environment variable \$USER: root

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

```

4. ulimit -a
   time(seconds)          unlimited
   file(blocks)           unlimited
   data(kbytes)           unlimited
   stack(kbytes)          unlimited
   coredump(blocks)       0
   memory(kbytes)         unlimited
   locked memory(kbytes)  2097152
   process                 3091233
   nfiles                  1024
   vmemory(kbytes)        unlimited
   locks                   unlimited
   rtprio                  0

5. sysinfo process ancestry
   /sbin/init splash
   /bin/login -p --
   -bash
   /bin/bash /home/DellFiles/bin/DELL_speed.sh
   /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
   /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
   /bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format
   html, pdf, txt
   python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
   /bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
   runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-VERS=7.0_T01 --output_format html, pdf, txt fpspeed
   runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-VERS=7.0_T01 --output_format html, pdf, txt --nopower --runmode speed --tune base --size
   test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.002/tempslogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /mnt/ramdisk/cpu2026rc2

6. /proc/cpuinfo
   model name      : AMD EPYC 9845 160-Core Processor
   vendor_id       : AuthenticAMD
   cpu family      : 26
   model           : 17
   stepping        : 0
   microcode       : 0xb101054
   bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
   TLB size        : 192 4K pages

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

### Platform Notes (Continued)

```

cpu cores      : 160
siblings      : 160
1 physical ids (chips)
160 processors (hardware threads)
physical id 0: core ids 0-159
physical id 0: apicids 0-159

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      160
On-line CPU(s) list:         0-159
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              AMD
Model name:                   AMD EPYC 9845 160-Core Processor
BIOS Model name:             AMD EPYC 9845 160-Core Processor      CPU @ 2.1GHz
BIOS CPU family:             107
CPU family:                   26
Model:                       17
Thread(s) per core:          1
Core(s) per socket:          160
Socket(s):                   1
Stepping:                    0
Frequency boost:              enabled
CPU(s) scaling MHz:          177%
CPU max MHz:                  2100.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4193.88

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

## Platform Notes (Continued)

```

cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_llid debug_swap

```

```

L1d cache: 7.5 MiB (160 instances)
L1i cache: 5 MiB (160 instances)
L2 cache: 160 MiB (160 instances)
L3 cache: 320 MiB (10 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-159
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
disabled; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	1M	160M	16	Unified	2	1024	1	64
L3	32M	320M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-159
node 0 size: 772886 MB
node 0 free: 759093 MB
node distances:
node 0
0: 10

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 791435560 kB

10. who -r  
run-level 5 Feb 6 06:24

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)  
Default Target Status  
graphical degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* nvidia-persistenced.service loaded failed failed NVIDIA Persistence Daemon  
Legend: LOAD -> Reflects whether the unit definition was properly loaded.  
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.  
SUB -> The low-level unit activation state, values depend on unit type.  
1 loaded units listed.

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup containerd cron dmesg docker e2scrub\_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd munge mysql networkd-dispatcher nvidia-persistenced nvme-fc-boot-connections nvmmf-autoconnect open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb ssh switcheroo-control sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth  
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs  
disabled console-getty debug-shell iscsid nftables nvidia-cdi-refresh nvidia-hibernate nvidia-powerd nvidia-resume nvidia-suspend nvidia-suspend-then-hibernate rsync serial-getty@ slurmd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextd systemd-time-wait-sync upower gdrdrv  
generated gdrdrv  
indirect systemd-sysupdate systemd-sysupdate-reboot uidd  
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

## Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-85-generic
root=UUID=fa6e327f-d7c6-4a1a-a00f-34f4bd279a0c
ro
quiet
splash
modprobe.blacklist=nouveau
iommu=pt
pci=realloc=off
pcie_aspm=off
nohz=off
vt.handoff=7

```

15. cpupower frequency-info

```

analyzing CPU 93:
  current policy: frequency should be within 1.50 GHz and 2.10 GHz.
                  The governor "schedutil" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2100MHz

```

16. sysctl

```

kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Jan-2026

## Platform Notes (Continued)

```

-----
17. /sys/kernel/mm/transparent_hugepage
   defrag          [always] defer defer+madvise madvise never
   enabled         [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 24.04.2 LTS

```

```

-----
20. Disk information
   SPEC is set to: /mnt/ramdisk/cpu2026rc2
   Filesystem      Type  Size  Used Avail Use% Mounted on
   tmpfs            tmpfs 120G   11G  110G   9% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:          Dell Inc.
   Product:         PowerEdge R7715
   Product Family:  PowerEdge
   Serial:          SLR7719

```

```

-----
22. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     12x 80AD000080AD HMC94AHBRA283N 64 GB 2 rank 6400, configured at 5200

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Jan-2026

## Platform Notes (Continued)

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.5.3  
BIOS Date: 10/29/2025  
BIOS Revision: 1.5

## Compiler Version Notes

=====  
C | 811.tealeaf\_s(base) 816.nab\_s(base) 881.neutron\_s(base)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
C++ | 803.sph\_exa\_s(base) 857.namd\_s(base) 867.nest\_s(base)  
872.marian\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
C++, C | 809.cactus\_s(base)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
Fortran | 800.pot3d\_s(base) 820.cloverleaf\_s(base) 822.palm\_s(base)  
849.fotonik3d\_s(base) 865.roms\_s(base)

flang version 22.1.0-rc2 (<https://github.com/llvm/llvm-project>  
a47b42eb9f9b302167b4fc413e6c92798d65dd0b)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin  
-----

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

## Compiler Version Notes (Continued)

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang-22

Benchmarks using both C and C++:

clang++ clang

## Base Portability Flags

800.pot3d\_s: -DSPEC\_LP64  
 803.sph\_exa\_s: -DSPEC\_LP64  
 809.cactus\_s: -DSPEC\_LP64  
 811.tealeaf\_s: -DSPEC\_LP64  
 816.nab\_s: -DSPEC\_LP64  
 820.cloverleaf\_s: -DSPEC\_LP64  
 822.palm\_s: -DSPEC\_LP64  
 849.fotonik3d\_s: -DSPEC\_LP64  
 857.namd\_s: -DSPEC\_LP64  
 865.roms\_s: -DSPEC\_LP64  
 867.nest\_s: -fno-finite-math-only -DSPEC\_LP64  
 872.marian\_s: -DSPEC\_LP64  
 881.neutron\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
 -Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5  
 -fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining  
 -fstruct-layout=7 -mllvm -inline-threshold=1000  
 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt  
 -mrecip=none -fopenmp -DSPEC\_OPENMP -lamdalloc -lamdlibm

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECSpeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

## Base Optimization Flags (Continued)

C benchmarks (continued):

-fopenmp=libomp -lomp

C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5  
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC\_OPENMP  
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

Fortran benchmarks:

-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM  
-ffast-math -funroll-loops -DSPEC\_OPENMP -fopenmp  
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp  
-lomp

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5  
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining  
-fstruct-layout=7 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mrecip=none -fopenmp -DSPEC\_OPENMP -pthread -lamdalloc -lamdlibm  
-fopenmp=libomp -lomp

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Optimization Flags

C benchmarks:

811.tealeaf\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 11.9

PowerEdge R7715 (AMD EPYC 9845 160-Core Processor)

SPECspeed®2026\_fp\_peak = 11.9

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Peak Optimization Flags (Continued)

816.nab\_s: basepeak = yes

881.neutron\_s: basepeak = yes

C++ benchmarks:

803.sph\_exa\_s: basepeak = yes

857.namd\_s: basepeak = yes

867.nest\_s: basepeak = yes

872.marian\_s: basepeak = yes

Fortran benchmarks:

800.pot3d\_s: basepeak = yes

820.cloverleaf\_s: basepeak = yes

822.palm\_s: basepeak = yes

849.fotonik3d\_s: basepeak = yes

865.roms\_s: basepeak = yes

Benchmarks using both C and C++:

809.cactus\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-06 03:10:45-0500.

Report generated on 2026-05-04 23:32:18 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.