



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4276 HE

SPECint®2006 = 30.1

SPECint_base2006 = 25.2

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

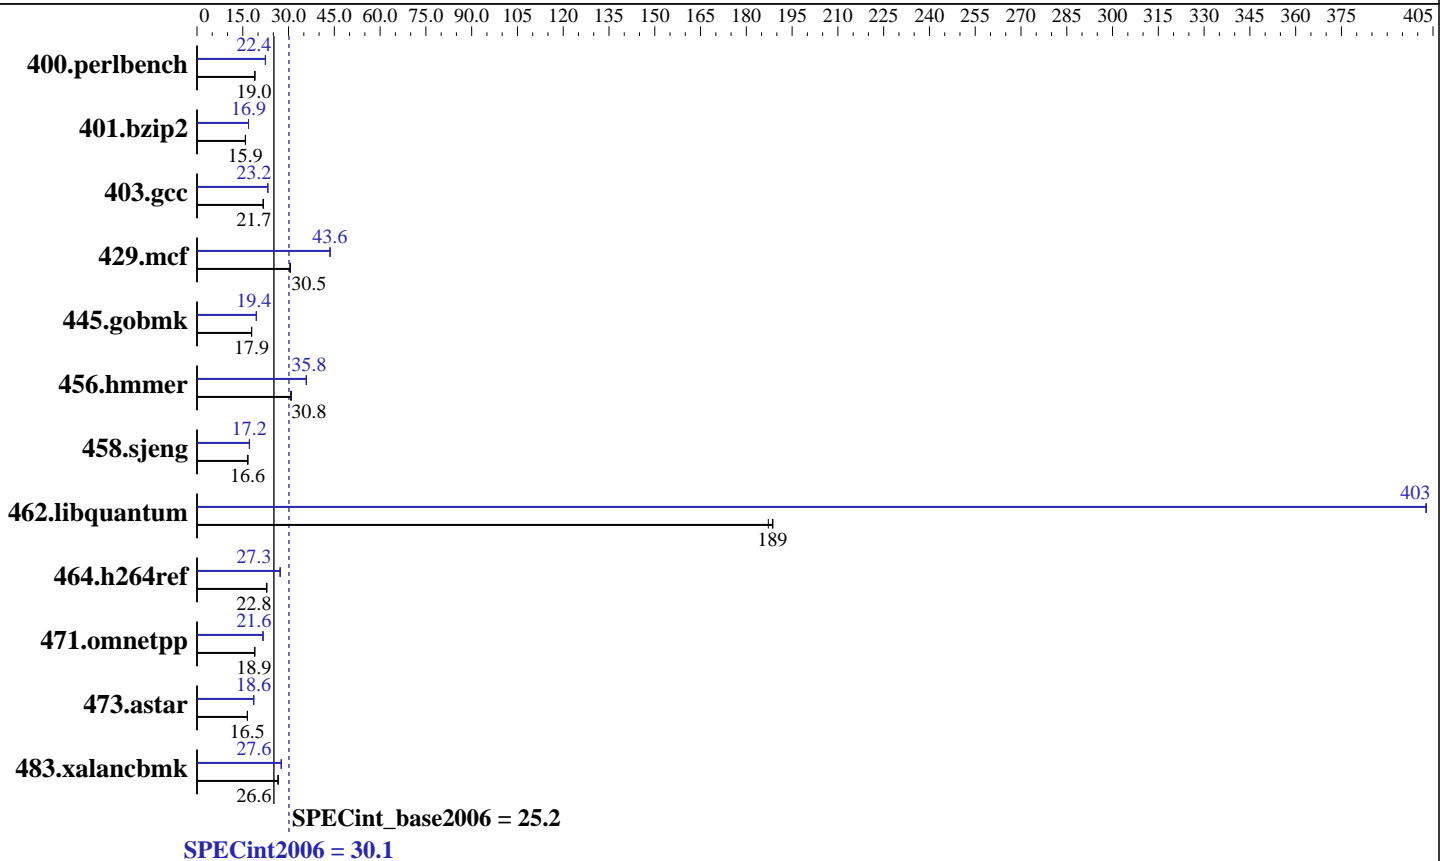

Hardware

CPU Name: AMD Opteron 4276 HE
 CPU Characteristics: AMD Turbo CORE technology up to 3.60 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 256 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 128 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
 Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4276 HE

SPECint2006 = 30.1

SPECint_base2006 = 25.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	516	18.9	515	19.0	516	19.0	436	22.4	436	22.4	436	22.4
401.bzip2	608	15.9	608	15.9	608	15.9	572	16.9	572	16.9	572	16.9
403.gcc	371	21.7	371	21.7	371	21.7	347	23.2	347	23.2	347	23.2
429.mcf	299	30.6	299	30.5	299	30.5	209	43.6	209	43.6	209	43.6
445.gobmk	586	17.9	586	17.9	586	17.9	539	19.4	539	19.4	540	19.4
456.hammer	303	30.8	303	30.8	303	30.8	260	35.8	260	35.8	260	35.8
458.sjeng	727	16.6	727	16.6	727	16.6	705	17.2	705	17.2	705	17.2
462.libquantum	110	189	110	189	111	187	51.4	403	51.4	403	51.5	403
464.h264ref	969	22.8	969	22.8	969	22.8	812	27.3	812	27.3	812	27.3
471.omnetpp	330	18.9	330	18.9	331	18.9	288	21.7	289	21.6	289	21.6
473.astar	425	16.5	425	16.5	425	16.5	378	18.6	378	18.6	378	18.6
483.xalancbmk	259	26.6	260	26.6	260	26.6	250	27.6	250	27.6	250	27.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Set kernel/randomize_va_space=0 in /etc/sysctl.conf
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr_hugepages=2000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "2000"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"

O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15"

O64_OMP_SPIN_COUNT = "800000"

O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4276 HE

SPECint2006 = 30.1

SPECint_base2006 = 25.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

General Notes (Continued)

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -CG:p2align=0
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m -LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4276 HE

SPECint2006 = 30.1

SPECint_base2006 = 25.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:load_exe=0 -CG:unroll_fb_req=on -CG:movext_icmp=off
 -HP:bdt=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off
 -GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bdt=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4276 HE

SPECint2006 = 30.1

SPECint_base2006 = 25.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-CG:p2align=1 -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:bdt=2m:heap=2m -WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -OPT:unroll_size=512
-OPT:unroll_times_max=8 -LNO:prefetch=2 -LNO:pf2=0
-CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m,limit=450 -apo

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -CG:gcm=off
-INLINE:aggressive=on -WOPT:if_conv=0 -WOPT:sib=on -m32
-HP:bdt=2m:heap=2m

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=0 -GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=0 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4276 HE

SPECint2006 = 30.1

SPECint_base2006 = 25.2

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:28:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 June 2012.