



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

### SPECint®\_rate2006 = 177

### Intel Server System S7000FC4UR (Intel Xeon E7420)

### SPECint\_rate\_base2006 = 166

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

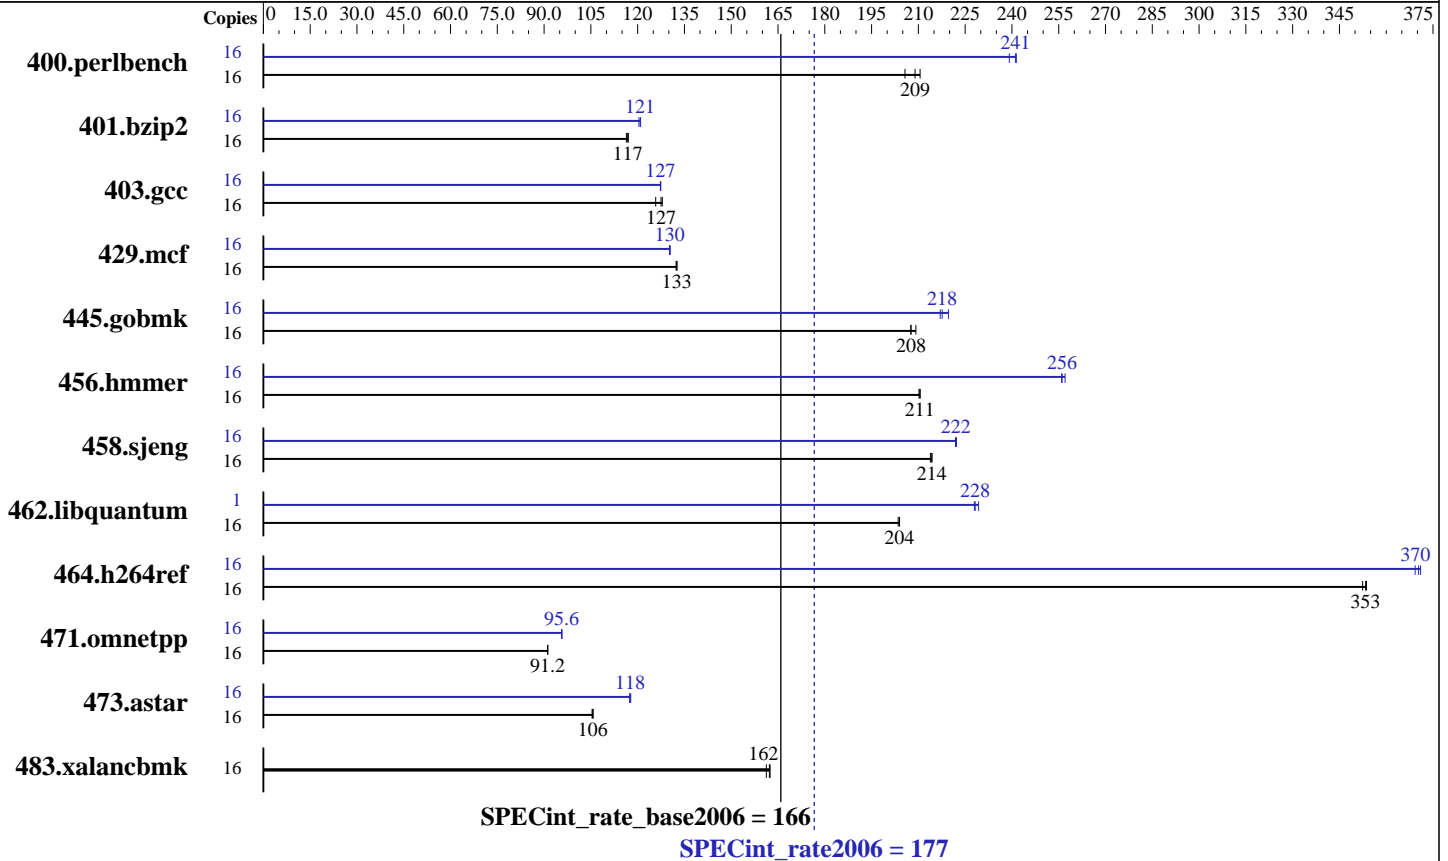

#### Hardware

CPU Name: Intel Xeon E7420  
 CPU Characteristics:  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 1,2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB(16x2GB Micron DDR2 5300F, C15-5-5, ECC)  
 Disk Subsystem: Seagate 73 GB SAS, 10K RPM  
 Other Hardware: None

#### Software

Operating System: SuSe Linux SLES10 SP2  
 Compiler: Intel C++ Compiler 11.0 for Linux  
 Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 177

Intel Server System S7000FC4UR (Intel Xeon E7420)

SPECint\_rate\_base2006 = 166

CPU2006 license: 13

Test date: Aug-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	760	206	742	211	<b>748</b>	<b>209</b>	16	<b>648</b>	<b>241</b>	654	239	648	241
401.bzip2	16	1327	116	<b>1322</b>	<b>117</b>	1320	117	16	1282	120	<b>1278</b>	<b>121</b>	1277	121
403.gcc	16	1024	126	<b>1010</b>	<b>127</b>	1007	128	16	1011	127	<b>1011</b>	<b>127</b>	1012	127
429.mcf	16	1101	133	1103	132	<b>1101</b>	<b>133</b>	16	<b>1120</b>	<b>130</b>	1119	130	1121	130
445.gobmk	16	<b>808</b>	<b>208</b>	809	208	802	209	16	764	220	773	217	<b>771</b>	<b>218</b>
456.hmmer	16	710	210	<b>709</b>	<b>211</b>	709	211	16	<b>583</b>	<b>256</b>	583	256	581	257
458.sjeng	16	903	214	905	214	<b>903</b>	<b>214</b>	16	872	222	871	222	<b>872</b>	<b>222</b>
462.libquantum	16	1629	204	<b>1626</b>	<b>204</b>	1625	204	1	<b>90.8</b>	<b>228</b>	90.4	229	90.9	228
464.h264ref	16	<b>1002</b>	<b>353</b>	1005	352	1001	354	16	959	369	<b>956</b>	<b>370</b>	954	371
471.omnetpp	16	<b>1097</b>	<b>91.2</b>	1097	91.2	1098	91.1	16	1044	95.8	1046	95.6	<b>1046</b>	<b>95.6</b>
473.astar	16	1066	105	1062	106	<b>1064</b>	<b>106</b>	16	957	117	954	118	<b>956</b>	<b>118</b>
483.xalancbmk	16	680	162	685	161	<b>681</b>	<b>162</b>	16	680	162	685	161	<b>681</b>	<b>162</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode  
 taskset was used to bind processes to cores except for 462.libquantum peak  
 OMP\_NUM\_THREADS set to number of processors  
 KMP\_AFFINITY set to "physical,0"  
 KMP\_STACKSIZE set to 64M  
 Hardware Prefetcher: Disabled  
 Adjacent Cache Line Prefetcher: Disabled  
 High Bandwidth Option: Disabled

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 177

Intel Server System S7000FC4UR (Intel Xeon E7420)

SPECint\_rate\_base2006 = 166

CPU2006 license: 13

Test date: Aug-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 177

Intel Server System S7000FC4UR (Intel Xeon E7420)

SPECint\_rate\_base2006 = 166

CPU2006 license: 13

Test date: Aug-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -parallel -par-runtime-control  
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 177

Intel Server System S7000FC4UR (Intel Xeon E7420)

SPECint\_rate\_base2006 = 166

CPU2006 license: 13

Test date: Aug-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.06.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.06.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:59:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 October 2008.