



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 258

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55


Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

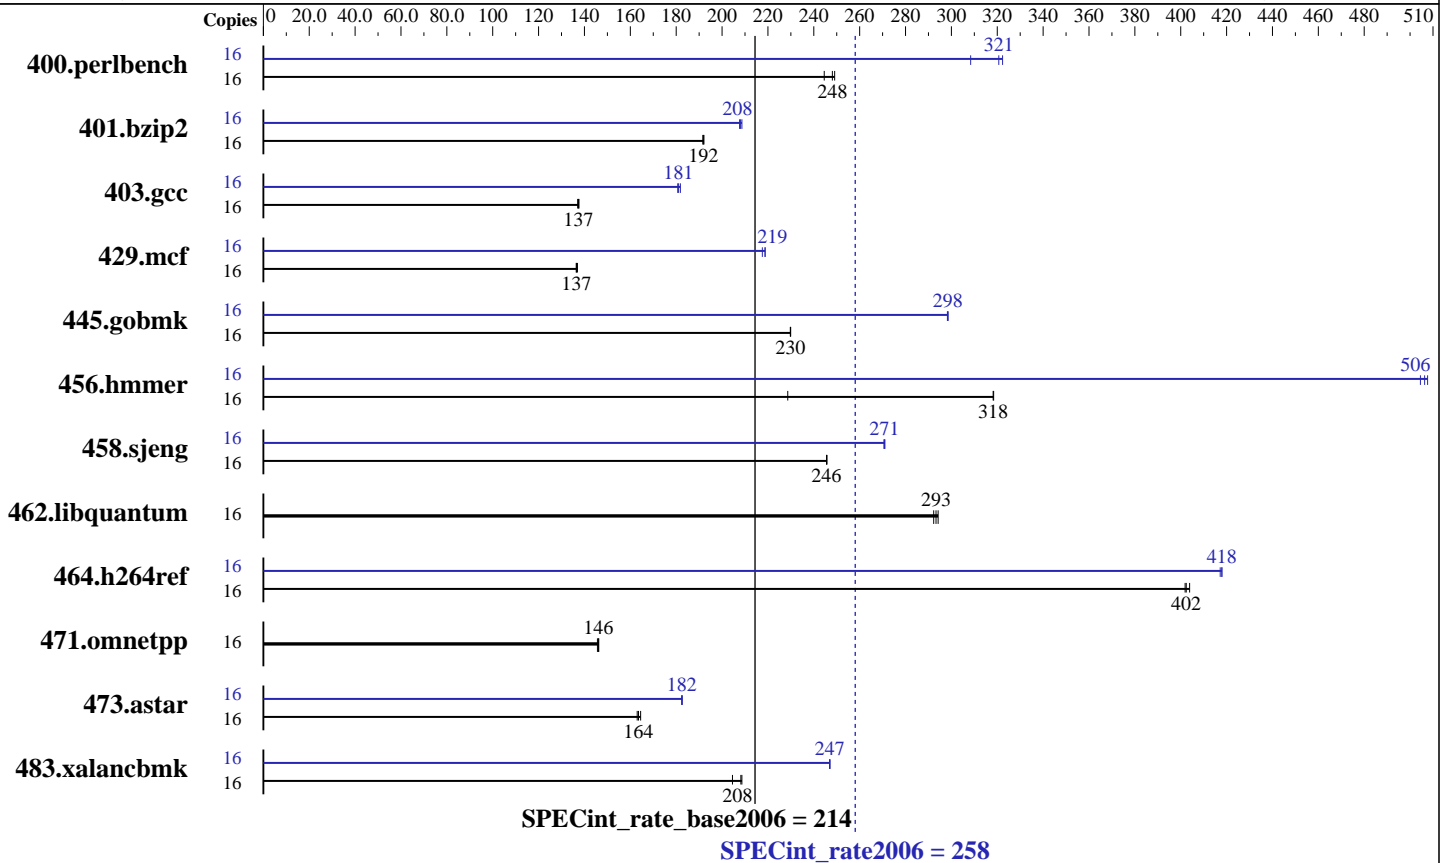

Hardware

CPU Name: AMD Opteron 8389
 CPU Characteristics:
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 73 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 32-bit and 64-bit libhugetlbfs libraries
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 258

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	639	245	628	249	630	248	16	487	321	507	308	485	322
401.bzip2	16	806	192	804	192	805	192	16	744	208	740	209	742	208
403.gcc	16	940	137	936	138	937	137	16	713	181	711	181	708	182
429.mcf	16	1066	137	1070	136	1069	137	16	667	219	671	218	667	219
445.gobmk	16	730	230	730	230	730	230	16	563	298	562	299	562	298
456.hammer	16	469	318	653	229	469	318	16	294	508	295	506	296	505
458.sjeng	16	788	246	788	246	788	246	16	714	271	715	271	715	271
462.libquantum	16	1130	293	1134	292	1127	294	16	1130	293	1134	292	1127	294
464.h264ref	16	881	402	877	404	880	402	16	847	418	849	417	847	418
471.omnetpp	16	684	146	687	146	684	146	16	684	146	687	146	684	146
473.astar	16	687	164	683	164	689	163	16	616	182	615	183	616	182
483.xalancbmk	16	540	205	530	208	529	209	16	447	247	447	247	447	247

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 258

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 258

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmcr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
 -IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
 -CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
 -OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
 -LNO:trip_count=256 -LNO:prefetch_ahead=10
 -CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -L/usr/lib -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 258

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
 -LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
 -LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: basepeak = yes

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
 --zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -L/root/work/libraries/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmcr: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 258

PowerEdge R905 (AMD Opteron 8389, 2.90 GHz)

SPECint_rate_base2006 = 214

CPU2006 license: 55

Test date: Feb-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html
<http://www.spec.org/cpu2006/flags/pathscale32-flags.html>
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml
<http://www.spec.org/cpu2006/flags/pathscale32-flags.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:04:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 May 2009.