



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®2006 = **22.0**

## IBM System x3650 M2 (Intel Xeon L5506)

SPECint\_base2006 = **19.9**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2001

Hardware Availability: Apr-2009

Software Availability: Feb-2009

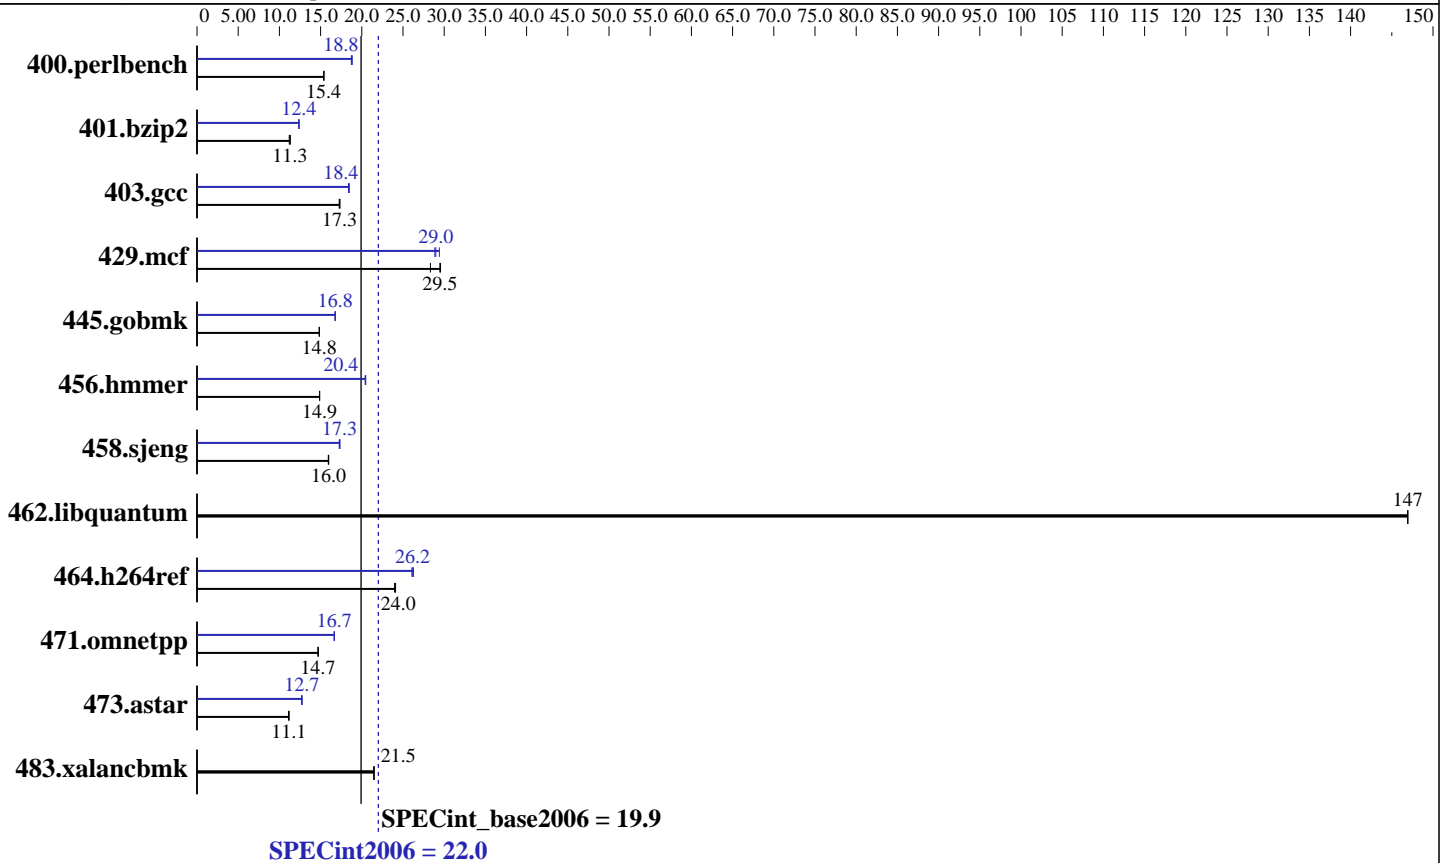

### Hardware

CPU Name: Intel Xeon L5506  
 CPU Characteristics:  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (12 x 2 GB PC3-10600R, 2 Rank, running at 800 MHz)  
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3 (x86\_64), Kernel 2.6.18-128.e15  
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.0

IBM System x3650 M2 (Intel Xeon L5506)

SPECint\_base2006 = 19.9

CPU2006 license: 11

Test date: Jan-2001

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	635	15.4	634	15.4	<u>635</u>	<u>15.4</u>	<u>520</u>	<u>18.8</u>	519	18.8	522	18.7
401.bzip2	862	11.2	853	11.3	<u>855</u>	<u>11.3</u>	779	12.4	781	12.4	<u>780</u>	<u>12.4</u>
403.gcc	<u>465</u>	<u>17.3</u>	464	17.4	466	17.3	<u>437</u>	<u>18.4</u>	438	18.4	436	18.5
429.mcf	322	28.3	309	29.6	<u>309</u>	<u>29.5</u>	310	29.4	<u>315</u>	<u>29.0</u>	316	28.9
445.gobmk	707	14.8	<u>707</u>	<u>14.8</u>	707	14.8	<u>625</u>	<u>16.8</u>	625	16.8	625	16.8
456.hammer	626	14.9	628	14.9	<u>627</u>	<u>14.9</u>	<u>457</u>	<u>20.4</u>	457	20.4	456	20.5
458.sjeng	759	15.9	757	16.0	<u>758</u>	<u>16.0</u>	698	17.3	<u>698</u>	<u>17.3</u>	701	17.3
462.libquantum	<u>141</u>	<u>147</u>	141	147	141	147	<u>141</u>	<u>147</u>	141	147	141	147
464.h264ref	<u>920</u>	<u>24.0</u>	923	24.0	918	24.1	<u>845</u>	<u>26.2</u>	849	26.1	842	26.3
471.omnetpp	<u>425</u>	<u>14.7</u>	425	14.7	425	14.7	375	16.7	376	16.6	<u>375</u>	<u>16.7</u>
473.astar	<u>630</u>	<u>11.1</u>	631	11.1	629	11.2	<u>551</u>	<u>12.7</u>	553	12.7	551	12.7
483.xalancbmk	321	21.5	<u>321</u>	<u>21.5</u>	321	21.5	<u>321</u>	<u>21.5</u>	<u>321</u>	<u>21.5</u>	321	21.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
Processor CPU C-States Enabled
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.0

IBM System x3650 M2 (Intel Xeon L5506)

SPECint\_base2006 = 19.9

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2001

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

icpc

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.0

IBM System x3650 M2 (Intel Xeon L5506)

SPECint\_base2006 = 19.9

CPU2006 license: 11

Test date: Jan-2001

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation SPECint2006 = 22.0

IBM System x3650 M2 (Intel Xeon L5506) SPECint\_base2006 = 19.9

<b>CPU2006 license:</b> 11	<b>Test date:</b> Jan-2001
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b> Apr-2009
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b> Feb-2009

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at <http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 00:41:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 June 2009.