



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 22.7

IBM System x iDataPlex dx360 M3 (Intel Xeon L5609)

SPECint_base2006 = 21.3

CPU2006 license: 11


Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

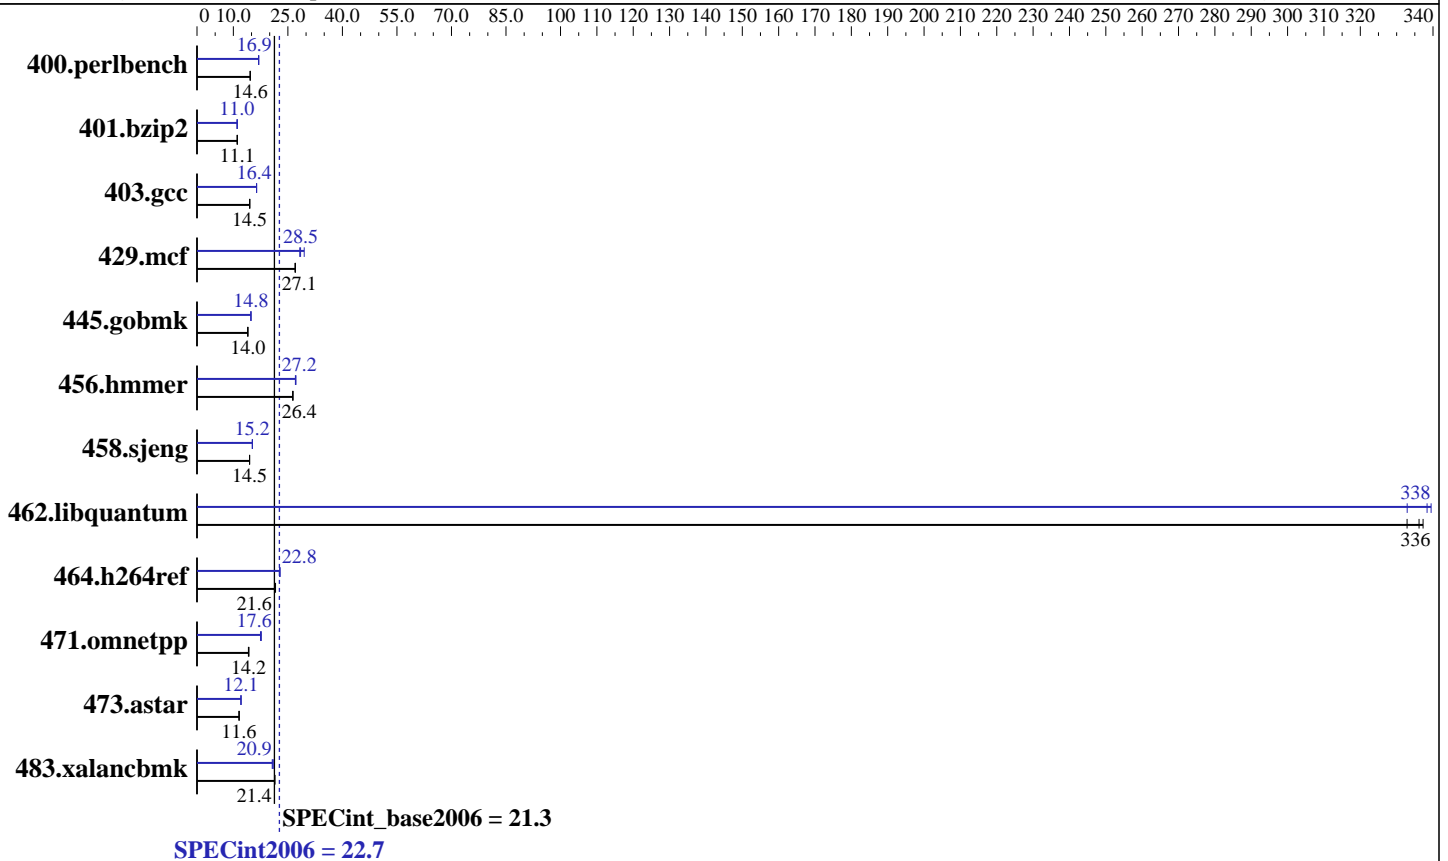

Hardware

CPU Name: Intel Xeon L5609
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.7

IBM System x iDataPlex dx360 M3 (Intel Xeon L5609)

SPECint_base2006 = 21.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	668	14.6	667	14.6	667	14.7	575	17.0	577	16.9	576	16.9
401.bzip2	870	11.1	874	11.0	870	11.1	869	11.1	875	11.0	875	11.0
403.gcc	555	14.5	556	14.5	554	14.5	491	16.4	492	16.4	491	16.4
429.mcf	338	27.0	337	27.1	337	27.1	323	28.3	320	28.5	309	29.5
445.gobmk	749	14.0	750	14.0	752	14.0	706	14.9	707	14.8	708	14.8
456.hammer	355	26.3	353	26.4	354	26.4	343	27.2	343	27.2	345	27.1
458.sjeng	837	14.5	837	14.5	836	14.5	794	15.2	794	15.2	795	15.2
462.libquantum	61.4	337	62.2	333	61.6	336	62.2	333	61.2	338	61.0	339
464.h264ref	1025	21.6	1024	21.6	1037	21.3	970	22.8	971	22.8	973	22.8
471.omnetpp	442	14.1	440	14.2	438	14.3	355	17.6	354	17.7	358	17.5
473.astar	606	11.6	606	11.6	607	11.6	580	12.1	580	12.1	580	12.1
483.xalancbmk	322	21.4	323	21.4	323	21.4	329	21.0	333	20.7	331	20.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Turbo Mode Enable
Turbo Boost set to Traditional
CPU C State Enable
Data Reuse Disable

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.7

IBM System x iDataPlex dx360 M3 (Intel Xeon L5609)

SPECint_base2006 = 21.3

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`429.mcf: icc -m32`

`445.gobmk: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.7

IBM System x iDataPlex dx360 M3 (Intel Xeon L5609)

SPECint_base2006 = 21.3

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation (Continued)

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
 -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 22.7

IBM System x iDataPlex dx360 M3 (Intel Xeon L5609)

SPECint_base2006 = 21.3

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:42:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 July 2010.