



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu SPARC Enterprise M5000

SPECint<sup>®</sup>\_rate2006 = 352

SPECint\_rate\_base2006 = 313

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

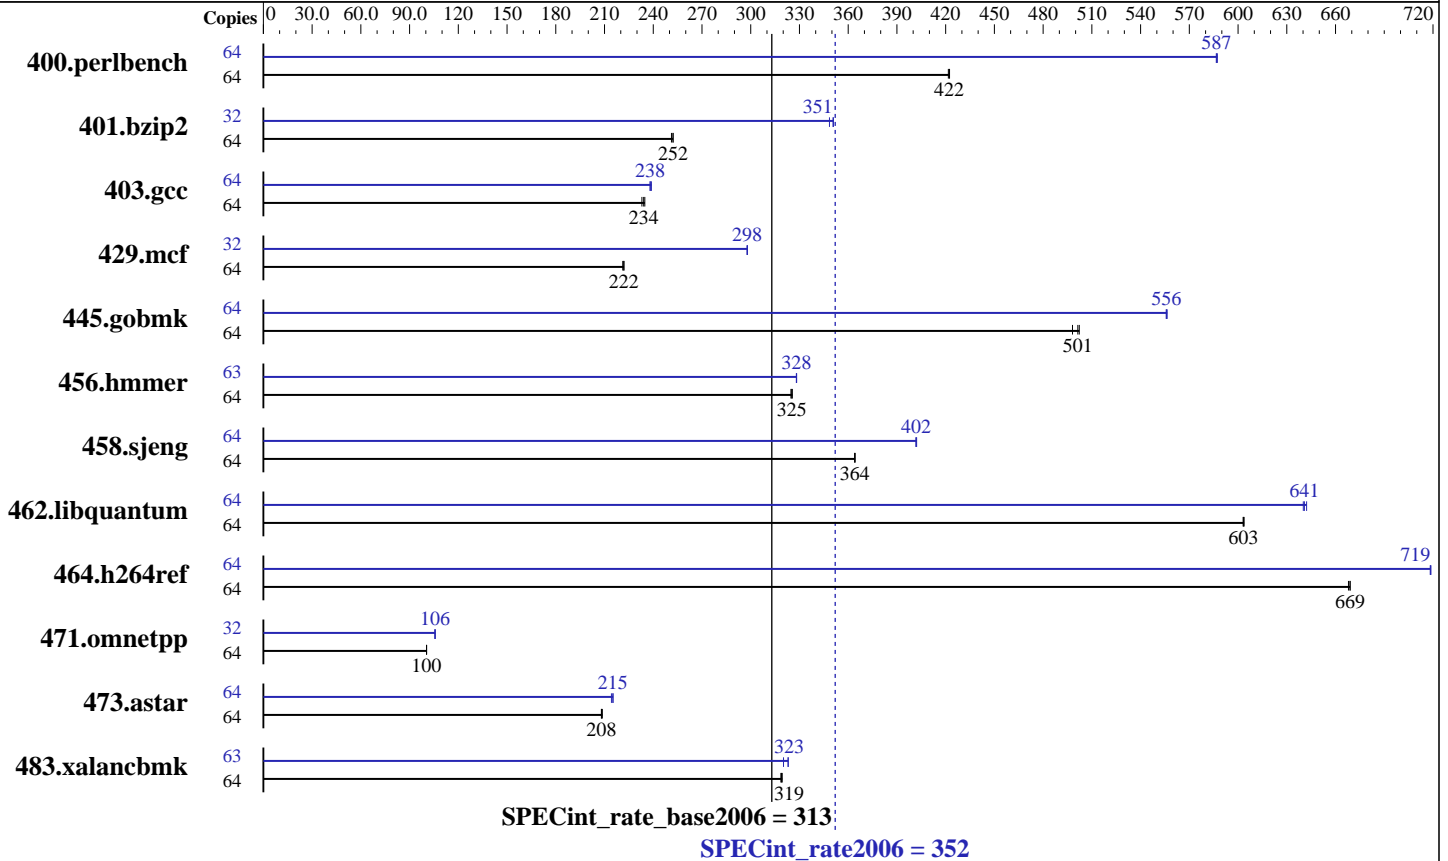

### Hardware

CPU Name: SPARC64 VII+  
 CPU Characteristics:  
 CPU MHz: 2660  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 to 4 CPUMs; each CPUM contains 2 CPU chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 11 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 128 GB (64 x 2 GB, 8-way interleaved)  
 Disk Subsystem: 134 GB on 2 x 72 GB 10K RPM SAS disks  
 Other Hardware: None

### Software

Operating System: Oracle Solaris 10 9/10  
 Compiler: Oracle Solaris Studio 12.2  
 Auto Parallel: No  
 File System: zfs with gzip compression  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu  
SPARC Enterprise M5000

SPECint\_rate2006 = 352  
SPECint\_rate\_base2006 = 313

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Oracle Corporation

Test date: Nov-2010  
Hardware Availability: Dec-2010  
Software Availability: Sep-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<b>1481</b>	<b>422</b>	1480	422	1483	422	64	<b>1066</b>	<b>587</b>	1066	587	1065	587
401.bzip2	64	2449	252	2458	251	<b>2449</b>	<b>252</b>	32	880	351	886	348	<b>881</b>	<b>351</b>
403.gcc	64	2194	235	<b>2201</b>	<b>234</b>	2211	233	64	2157	239	2165	238	<b>2163</b>	<b>238</b>
429.mcf	64	<b>2632</b>	<b>222</b>	2629	222	2638	221	32	980	298	<b>980</b>	<b>298</b>	979	298
445.gobmk	64	<b>1339</b>	<b>501</b>	1337	502	1348	498	64	1208	556	1207	556	<b>1208</b>	<b>556</b>
456.hammer	64	1834	326	<b>1836</b>	<b>325</b>	1839	325	63	1792	328	<b>1791</b>	<b>328</b>	1791	328
458.sjeng	64	2126	364	<b>2127</b>	<b>364</b>	2127	364	64	1928	402	<b>1927</b>	<b>402</b>	1926	402
462.libquantum	64	2197	604	2199	603	<b>2198</b>	<b>603</b>	64	<b>2069</b>	<b>641</b>	2071	640	2065	642
464.h264ref	64	2120	668	2117	669	<b>2117</b>	<b>669</b>	64	1972	718	1971	719	<b>1971</b>	<b>719</b>
471.omnetpp	64	<b>3983</b>	<b>100</b>	3983	100	3981	100	32	<b>1892</b>	<b>106</b>	1891	106	1893	106
473.astar	64	<b>2158</b>	<b>208</b>	2159	208	2153	209	64	<b>2089</b>	<b>215</b>	2097	214	2087	215
483.xalancbmk	64	1386	319	1383	319	<b>1385</b>	<b>319</b>	63	1345	323	1358	320	<b>1346</b>	<b>323</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches  
118683-05 119963-20 120753-08  
Oracle Solaris Studio 12.2 and patches are available at  
<http://oracle.com/goto/solarisstudio>

## Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

## Operating System Notes

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

```
/etc/system parameters
autoup=600
```

Causes pages older than the listed number of seconds to be written by fsflush.

```
tune_t_fsflushr=10
```

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**  
**SPARC Enterprise M5000**

**SPECint\_rate2006 = 352**

**SPECint\_rate\_base2006 = 313**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Oracle Corporation

**Test date:** Nov-2010  
**Hardware Availability:** Dec-2010  
**Software Availability:** Sep-2010

## Operating System Notes (Continued)

```
zfs:zfs_arc_min=0x10000000
zfs:zfs_arc_max=0x380000000
Limits the consumption of memory by the zfs file system
cache to 256 MB to 14 GB . (The arc_max sets the maximum
cache size; arc_min sets the minimum.)
kernel_cage_enable=0
Allows the kernel to use memory in any locality group.
In particular, allows ZFS file caches to be located on
any memory board.
lpg_alloc_prefer=1
Indicates that extra effort should be taken to ensure
that pages are created in the nearby lgroup (NUMA location).
The "webconsole" service was turned off using
svcadm disable webconsole
The system had 52 GB of swap space.
```

## Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M5000 server from Oracle. The SPARC Enterprise M5000 server from Oracle and from Fujitsu are electrically equivalent.

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**  
**SPARC Enterprise M5000**

**SPECint\_rate2006 = 352**

**SPECint\_rate\_base2006 = 313**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Oracle Corporation

**Test date:** Nov-2010  
**Hardware Availability:** Dec-2010  
**Software Availability:** Sep-2010

## Base Optimization Flags

C benchmarks:  
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias\_level=std -l12amm

C++ benchmarks:  
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias\_level=compatible  
-xdepend -library=stlport4 -lfast

## Base Other Flags

C benchmarks:  
-xjobs=32 -V -#

C++ benchmarks:  
-xjobs=32 -verbose=diags,version

## Peak Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC  
403.gcc: -DSPEC\_CPU\_SOLARIS  
462.libquantum: -DSPEC\_CPU\_SOLARIS  
483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-M /usr/lib/ld/map.bssalign -fma=fused -xipo=1  
-xalias\_level=std -xrestrict -Xc -xO4 -xprefetch=latx:0.5  
-lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xalias\_level=strong -xchip=generic

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**  
**SPARC Enterprise M5000**

**SPECint\_rate2006 = 352**

**SPECint\_rate\_base2006 = 313**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Oracle Corporation

**Test date:** Nov-2010  
**Hardware Availability:** Dec-2010  
**Software Availability:** Sep-2010

## Peak Optimization Flags (Continued)

403.gcc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xipo=2 -xalias\_level=std -xprefetch=no  
-xarch=sparcfmaf -l12amm

429.mcf: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xipo=2 -xprefetch\_auto\_type=indirect\_array\_access  
-xchip=generic -xlinkopt -W2,-Apf:l1list=3  
-W2,-Apf:noinnerl1list -lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xalias\_level=std -xrestrict -xlinkopt  
-xprefetch=no%auto -xunroll=6 -lfast -l12amm

456.hmmcr: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xipo=2

458.sjeng: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xipo=2 -xO4 -xlinkopt -xprefetch=no%auto  
-l12amm

462.libquantum: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch=no  
-lbsdmalloc

464.h264ref: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xipo=2 -xarch=sparcfmaf -xalias\_level=std -xprefetch=no  
-l12amm

### C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=compatible -xdepend -library=stlport4  
-fma=fused -xipo=2 -Qoption cg -Qlp-av=0 -xO4 -lfast

473.astar: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=compatible -xdepend -library=stlport4  
-M /usr/lib/ld/map.bssalign -fma=fused -xipo=2  
-xprefetch=no%auto -lfast -lbsdmalloc

483.xalancbmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=compatible -xdepend -library=stlport4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**  
**SPARC Enterprise M5000**

**SPECint\_rate2006 = 352**

**SPECint\_rate\_base2006 = 313**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Oracle Corporation

**Test date:** Nov-2010  
**Hardware Availability:** Dec-2010  
**Software Availability:** Sep-2010

## Peak Optimization Flags (Continued)

483.xalanbmk (continued):  
-fma=fused -xipo=2 -xprefetch=no -xO4 -lfast

## Peak Other Flags

C benchmarks:  
-xjobs=32 -V -#

C++ benchmarks:  
-xjobs=32 -verbose=diags,version

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:48:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 December 2010.