



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECint_rate2006 = 406

SGI Altix ICE 8400EX (Intel Xeon X5680, 3.33GHz)

SPECint_rate_base2006 = 376

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jan-2011

Hardware Availability: May-2010

Software Availability: Dec-2010

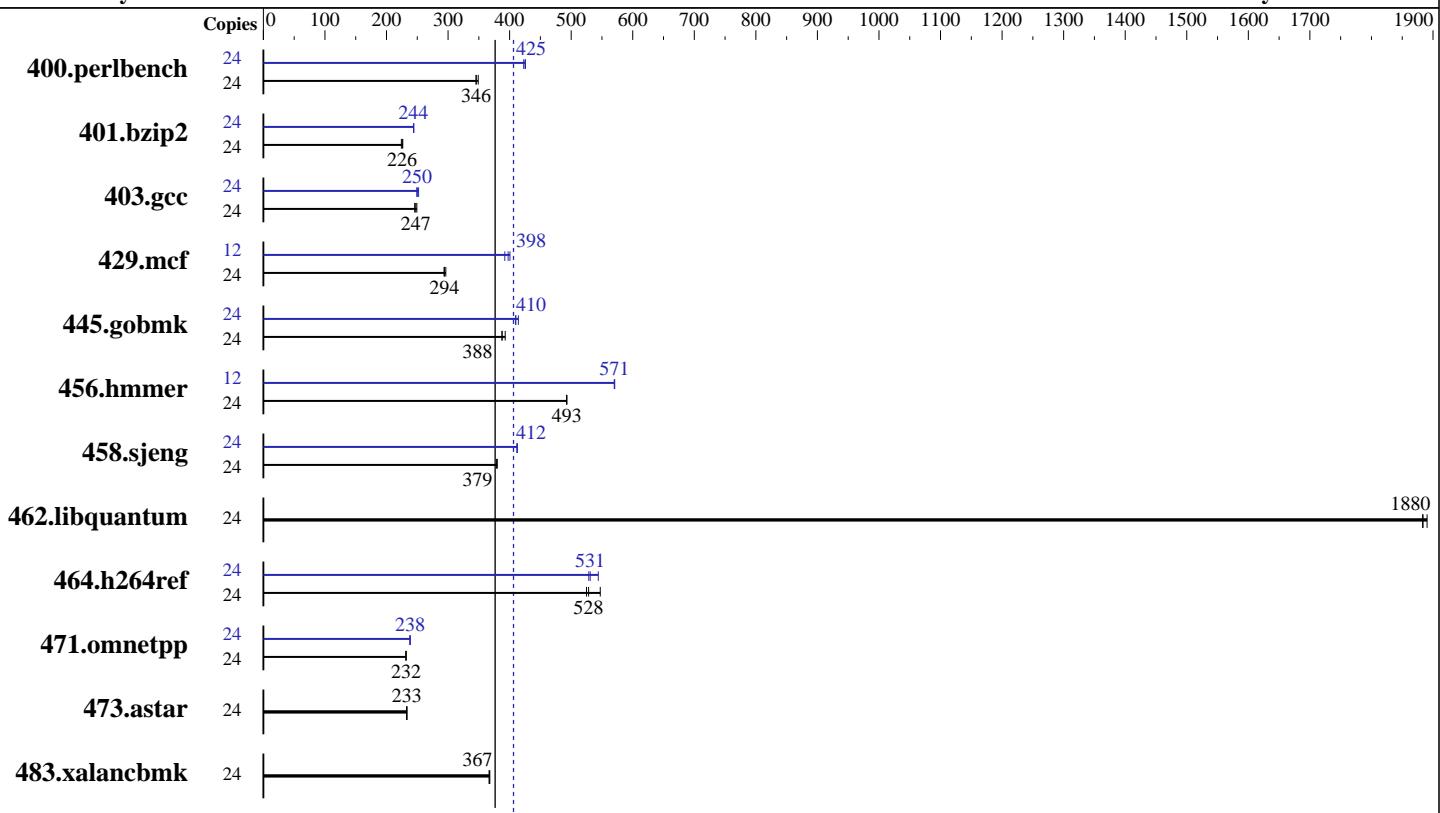

SPECint_rate_base2006 = 376

SPECint_rate2006 = 406

Hardware

CPU Name:	Intel Xeon X5680
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	8.8 TB RAID 5
Other Hardware:	60 x 146 GB SAS (Seagate Cheetah 15k.5)

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.13-0.4-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	NFSv3 IPoIB
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX (Intel Xeon X5680, 3.33GHz)

SPECint_rate2006 = 406

SPECint_rate_base2006 = 376

CPU2006 license: 4

Test date: Jan-2011

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Dec-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	678	346	672	349	679	345	24	555	423	552	425	551	426
401.bzip2	24	1027	226	1033	224	1023	226	24	949	244	948	244	949	244
403.gcc	24	775	249	781	247	786	246	24	766	252	773	250	775	249
429.mcf	24	744	294	739	296	745	294	12	279	392	273	401	275	398
445.gobmk	24	650	388	641	393	649	388	24	608	414	614	410	614	410
456.hammer	24	455	492	454	493	454	493	12	196	571	196	571	196	570
458.sjeng	24	766	379	766	379	765	380	24	704	412	705	412	704	412
462.libquantum	24	263	1890	264	1880	264	1880	24	263	1890	264	1880	264	1880
464.h264ref	24	1005	528	1012	525	971	547	24	1005	529	976	544	1000	531
471.omnetpp	24	647	232	647	232	648	231	24	629	238	630	238	629	238
473.astar	24	722	233	724	233	724	233	24	722	233	724	233	724	233
483.xalancbmk	24	450	368	451	367	451	367	24	450	368	451	367	451	367

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
Set 10800 in /proc/sys/vm/nr_hugepages
mount -t hugetlbfs nodev /tmp/hugepages

General Notes

Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX (Intel Xeon X5680, 3.33GHz)

SPECint_rate2006 = 406

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jan-2011

Hardware Availability: May-2010

Software Availability: Dec-2010

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX (Intel Xeon X5680, 3.33GHz)

SPECint_rate2006 = 406

SPECint_rate_base2006 = 376

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jan-2011

Hardware Availability: May-2010

Software Availability: Dec-2010

Peak Portability Flags (Continued)

456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX (Intel Xeon X5680, 3.33GHz)

SPECint_rate2006 = 406

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jan-2011

Hardware Availability: May-2010

Software Availability: Dec-2010

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:01:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 February 2011.