



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 126

NovaScale R460 F2 (Intel Xeon E5603, 1.60 GHz)

SPECint_rate_base2006 = 118

CPU2006 license: 20


Test date: Feb-2011

Test sponsor: Bull SAS

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

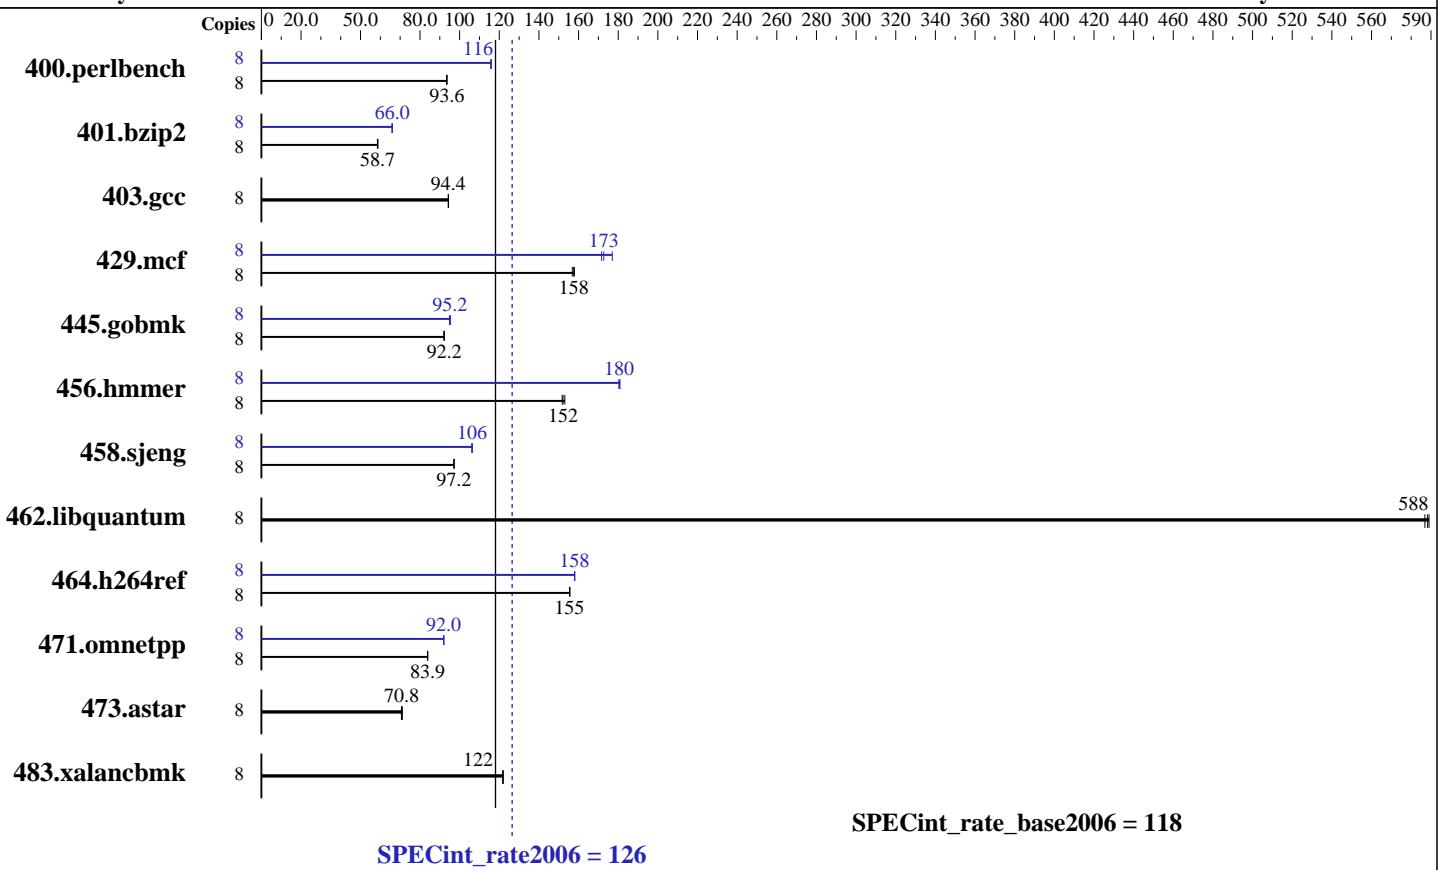

SPECint_rate_base2006 = 118

Hardware

CPU Name:	Intel Xeon E5603
CPU Characteristics:	
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem:	146 GB 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon E5603, 1.60 GHz)

SPECint_rate2006 = 126

SPECint_rate_base2006 = 118

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	835	93.6	835	93.6	837	93.4	8	674	116	674	116	675	116
401.bzip2	8	1316	58.7	1319	58.5	1314	58.8	8	1169	66.0	1170	66.0	1171	65.9
403.gcc	8	682	94.4	682	94.4	683	94.3	8	682	94.4	682	94.4	683	94.3
429.mcf	8	465	157	462	158	463	158	8	422	173	425	172	412	177
445.gobmk	8	910	92.2	911	92.1	910	92.2	8	884	94.9	881	95.3	881	95.2
456.hammer	8	491	152	488	153	492	152	8	414	180	413	181	414	180
458.sjeng	8	996	97.2	997	97.1	996	97.2	8	911	106	911	106	910	106
462.libquantum	8	282	588	282	587	281	589	8	282	588	282	587	281	589
464.h264ref	8	1137	156	1139	155	1139	155	8	1120	158	1120	158	1120	158
471.omnetpp	8	596	83.9	597	83.8	596	83.9	8	543	92.0	544	91.9	543	92.0
473.astar	8	794	70.8	790	71.1	795	70.6	8	794	70.8	790	71.1	795	70.6
483.xalancbmk	8	453	122	453	122	453	122	8	453	122	453	122	453	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' used to set the stacksize prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 7200 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Data Reuse = Disabled (Default = Enabled)

General Notes

The Dell PowerEdge R710 and
the Bull NovaScale R460 F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R710 model.
Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon E5603, 1.60 GHz)

SPECint_rate2006 = 126

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Feb-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:
 `icc -m32`

C++ benchmarks:
 `icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
 `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
 -B /usr/share/libhugetlbf/ -Wl,-hugetlbf-link=BDT`

C++ benchmarks:
 `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
 -L/smartheap -lsmartheap
 -B /usr/share/libhugetlbf/ -Wl,-hugetlbf-link=BDT`

Base Other Flags

C benchmarks:
 `403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
 `icc -m32`

400.perlbench: `icc -m64`
401.bzip2: `icc -m64`
456.hmmr: `icc -m64`
458.sjeng: `icc -m64`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon E5603, 1.60 GHz)

SPECint_rate2006 = 126

SPECint_rate_base2006 = 118

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon E5603, 1.60 GHz)

SPECint_rate2006 = 126

SPECint_rate_base2006 = 118

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/smarterheap -lsmarterheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:55:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2011.