



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c G7  
(1.6 GHz, Intel Xeon E5603)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 118**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

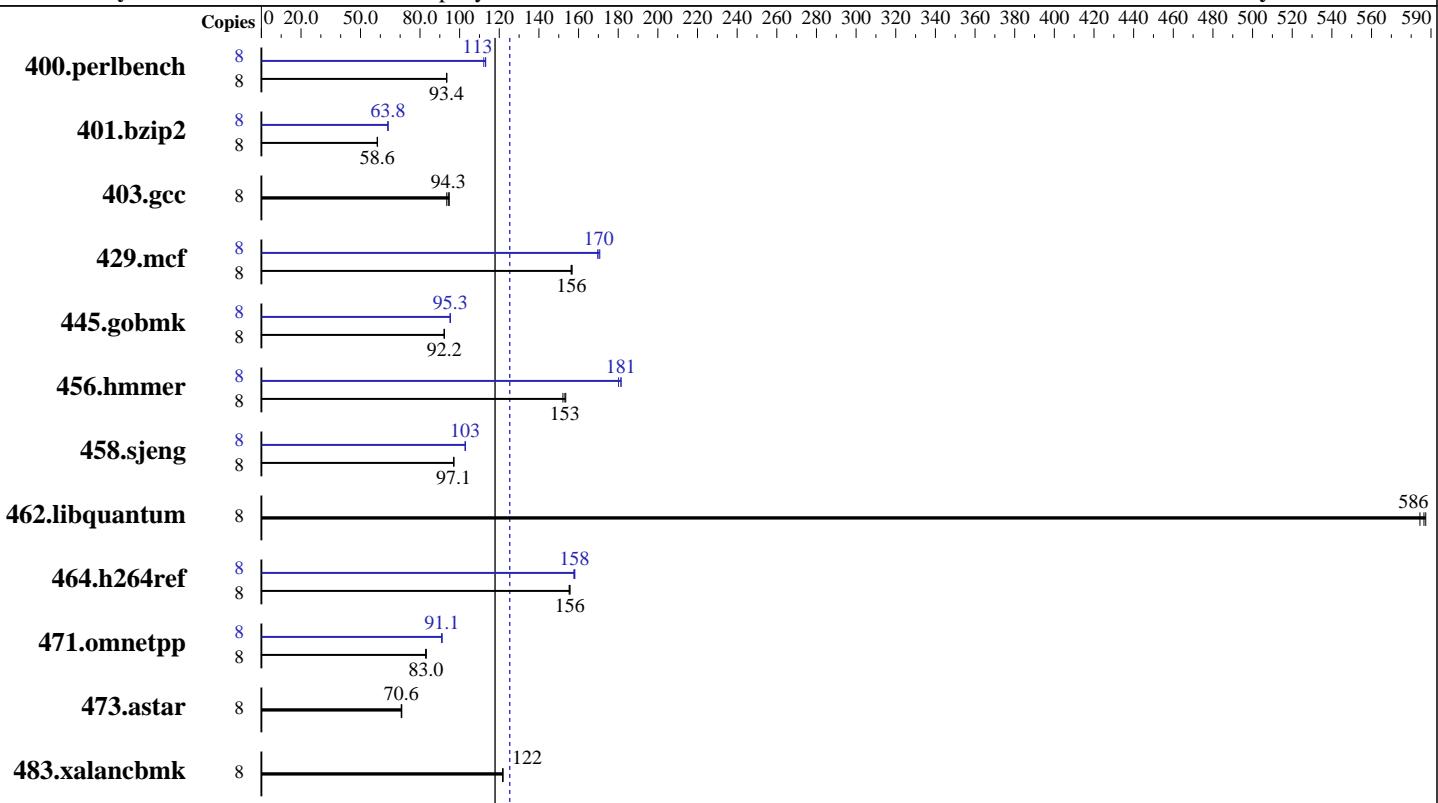

**SPECint\_rate\_base2006 = 118**

**SPECint\_rate2006 = 125**

### Hardware

CPU Name:	Intel Xeon E5603
CPU Characteristics:	
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz)
Disk Subsystem:	1 x 146 GB 10 K SAS
Other Hardware:	None

### Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c G7  
(1.6 GHz, Intel Xeon E5603)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 118**

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>837</b>	<b>93.4</b>	837	93.4	835	93.6	8	691	113	<b>691</b>	<b>113</b>	697	112
401.bzip2	8	1318	58.6	<b>1319</b>	<b>58.6</b>	1322	58.4	8	<b>1209</b>	<b>63.8</b>	1210	63.8	1209	63.9
403.gcc	8	679	94.8	689	93.5	<b>683</b>	<b>94.3</b>	8	679	94.8	689	93.5	<b>683</b>	<b>94.3</b>
429.mcf	8	467	156	465	157	<b>466</b>	<b>156</b>	8	<b>428</b>	<b>170</b>	430	170	427	171
445.gobmk	8	910	92.2	<b>910</b>	<b>92.2</b>	909	92.4	8	882	95.2	<b>880</b>	<b>95.3</b>	880	95.3
456.hmmer	8	<b>487</b>	<b>153</b>	486	154	491	152	8	<b>412</b>	<b>181</b>	414	180	411	181
458.sjeng	8	997	97.1	<b>997</b>	<b>97.1</b>	998	97.0	8	<b>941</b>	<b>103</b>	941	103	941	103
462.libquantum	8	282	587	<b>283</b>	<b>586</b>	284	584	8	282	587	<b>283</b>	<b>586</b>	284	584
464.h264ref	8	<b>1138</b>	<b>156</b>	1140	155	1137	156	8	1120	158	<b>1121</b>	<b>158</b>	1123	158
471.omnetpp	8	601	83.2	<b>602</b>	<b>83.0</b>	603	82.9	8	<b>549</b>	<b>91.1</b>	549	91.1	550	91.0
473.astar	8	<b>795</b>	<b>70.6</b>	793	70.8	795	70.6	8	<b>795</b>	<b>70.6</b>	793	70.8	795	70.6
483.xalancbmk	8	<b>453</b>	<b>122</b>	453	122	453	122	8	<b>453</b>	<b>122</b>	453	122	453	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores.

## Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'unlimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 3600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS configuration:  
 HP Power Profile set to Maximum Performance  
 Thermal Configuration set to Increased Cooling  
 Data Reuse set to Disabled

## General Notes

Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c G7  
(1.6 GHz, Intel Xeon E5603)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 118**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c G7  
(1.6 GHz, Intel Xeon E5603)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 118**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32 -ansi-alias
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias -auto-ilp32

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll14 -auto-ilp32
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll12 -ansi-alias
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c G7  
(1.6 GHz, Intel Xeon E5603)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 118**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Dec-2010

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/smartheap -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:42:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2011.