



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp®2006 =	40.6
IBM System x3650 M3 (Intel Xeon E5607)	SPECfp_base2006 =	38.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2011

Hardware Availability: Feb-2011

Software Availability: Apr-2011

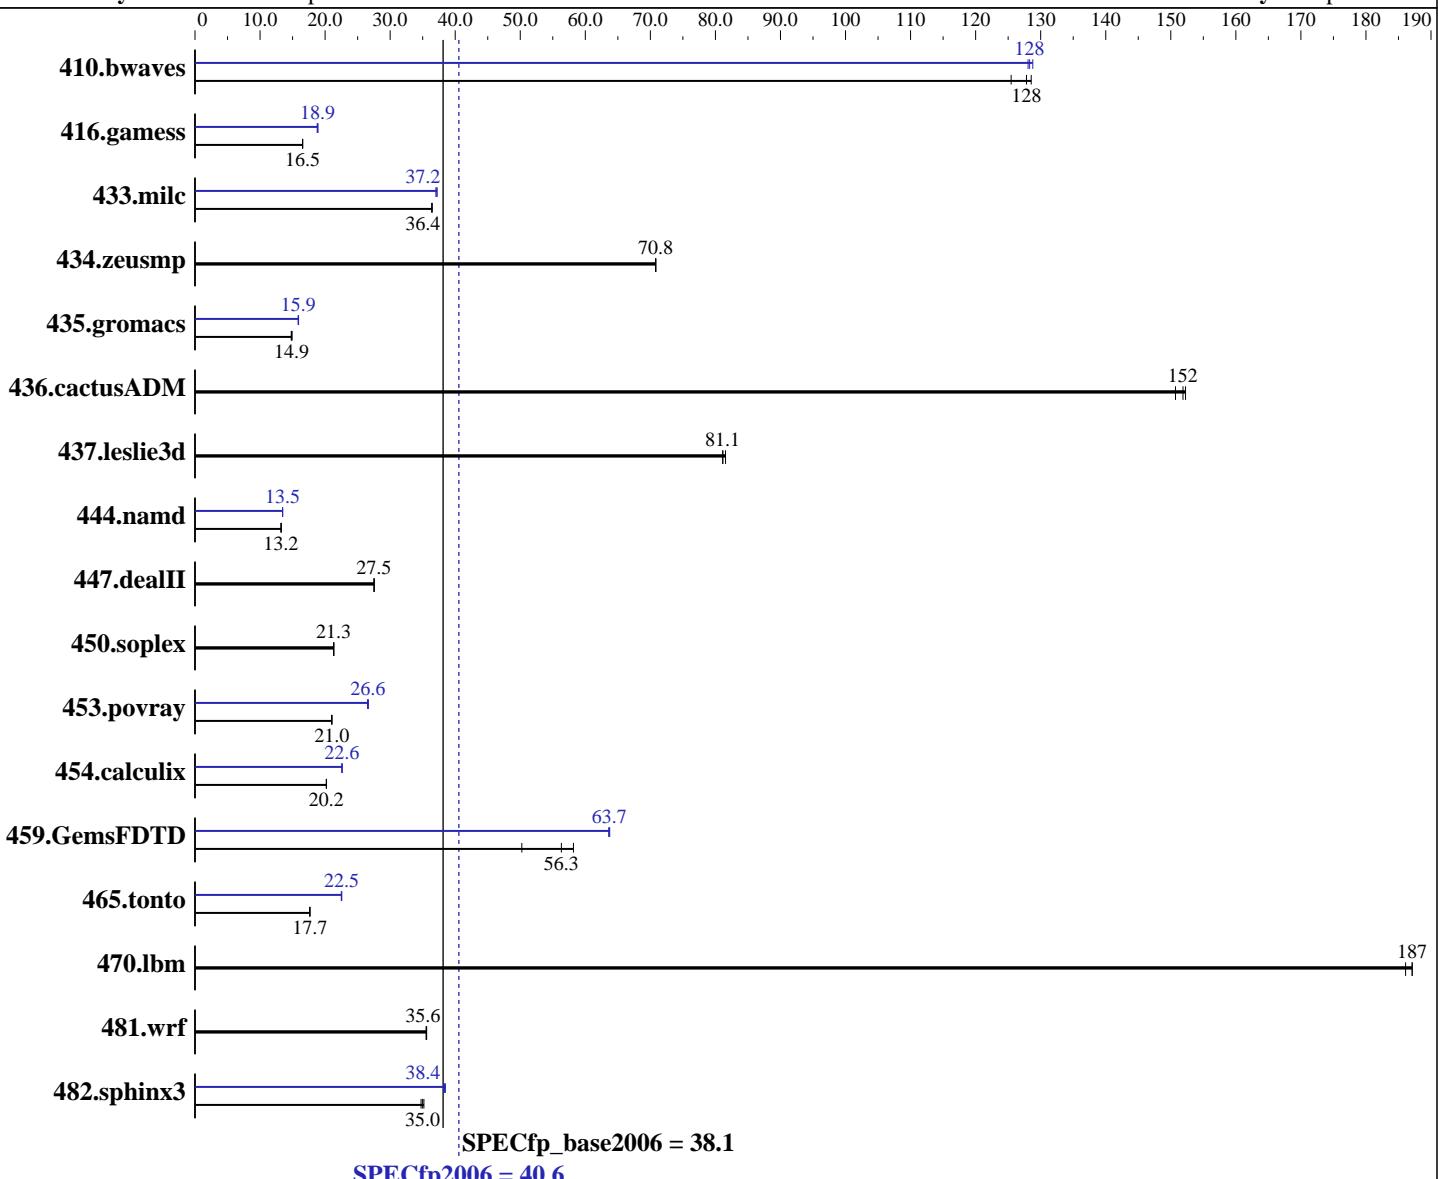

Hardware		Software	
CPU Name:	Intel Xeon E5607	Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
CPU Characteristics:	2267	Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64
CPU MHz:	2267	Auto Parallel:	Version 12.0 Update 3
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips	Base Pointers:	64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	256 KB I+D on chip per core		

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 40.6

IBM System x3650 M3 (Intel Xeon E5607)

SPECfp_base2006 = 38.1

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz)
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio								
410.bwaves	108	125	106	128	106	129	106	128	106	129	106	128
416.gamess	1184	16.5	1182	16.6	1184	16.5	1037	18.9	1043	18.8	1037	18.9
433.milc	252	36.4	252	36.4	252	36.4	247	37.2	247	37.2	248	37.0
434.zeusmp	128	70.8	128	70.8	128	70.8	128	70.8	128	70.8	128	70.8
435.gromacs	478	14.9	483	14.8	481	14.9	448	15.9	450	15.9	449	15.9
436.cactusADM	79.3	151	78.7	152	78.5	152	79.3	151	78.7	152	78.5	152
437.leslie3d	116	81.1	116	81.1	115	81.6	116	81.1	116	81.1	115	81.6
444.namd	606	13.2	606	13.2	606	13.2	596	13.5	596	13.5	595	13.5
447.dealII	415	27.5	416	27.5	415	27.5	415	27.5	416	27.5	415	27.5
450.soplex	391	21.3	391	21.3	391	21.3	391	21.3	391	21.3	391	21.3
453.povray	254	21.0	253	21.0	253	21.0	200	26.6	200	26.6	201	26.5
454.calculix	408	20.2	409	20.2	408	20.2	366	22.6	365	22.6	365	22.6
459.GemsFDTD	211	50.2	182	58.2	188	56.3	167	63.6	166	63.8	167	63.7
465.tonto	557	17.7	556	17.7	558	17.6	436	22.6	438	22.5	437	22.5
470.lbm	73.4	187	73.4	187	73.8	186	73.4	187	73.4	187	73.8	186
481.wrf	314	35.5	314	35.6	314	35.6	314	35.5	314	35.6	314	35.6
482.sphinx3	557	35.0	554	35.2	561	34.7	510	38.2	506	38.5	508	38.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Power C-State enabled in BIOS
 Data Reuse disabled in BIOS
 Demand Scrub disabled in BIOS



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	40.6
IBM System x3650 M3 (Intel Xeon E5607)	SPECfp_base2006 =	38.1
CPU2006 license: 11	Test date:	Apr-2011
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2011
Tested by: IBM Corporation	Software Availability:	Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores
Binaries compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 40.6

IBM System x3650 M3 (Intel Xeon E5607)

SPECfp_base2006 = 38.1

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	40.6
IBM System x3650 M3 (Intel Xeon E5607)	SPECfp_base2006 =	38.1
CPU2006 license: 11	Test date:	Apr-2011
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2011
Tested by: IBM Corporation	Software Availability:	Apr-2011

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xsSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
 -static

416.gamess: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -opt-prefetch -parallel
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
 -opt-malloc-options=3 -auto -unroll14
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xsSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 40.6

IBM System x3650 M3 (Intel Xeon E5607)

SPECfp_base2006 = 38.1

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 18:43:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 April 2011.