



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 40.6

IBM System x3630 M3 (Intel Xeon E5607)

SPECfp_base2006 = 38.0

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2011

Hardware Availability: Feb-2011

Software Availability: Apr-2011

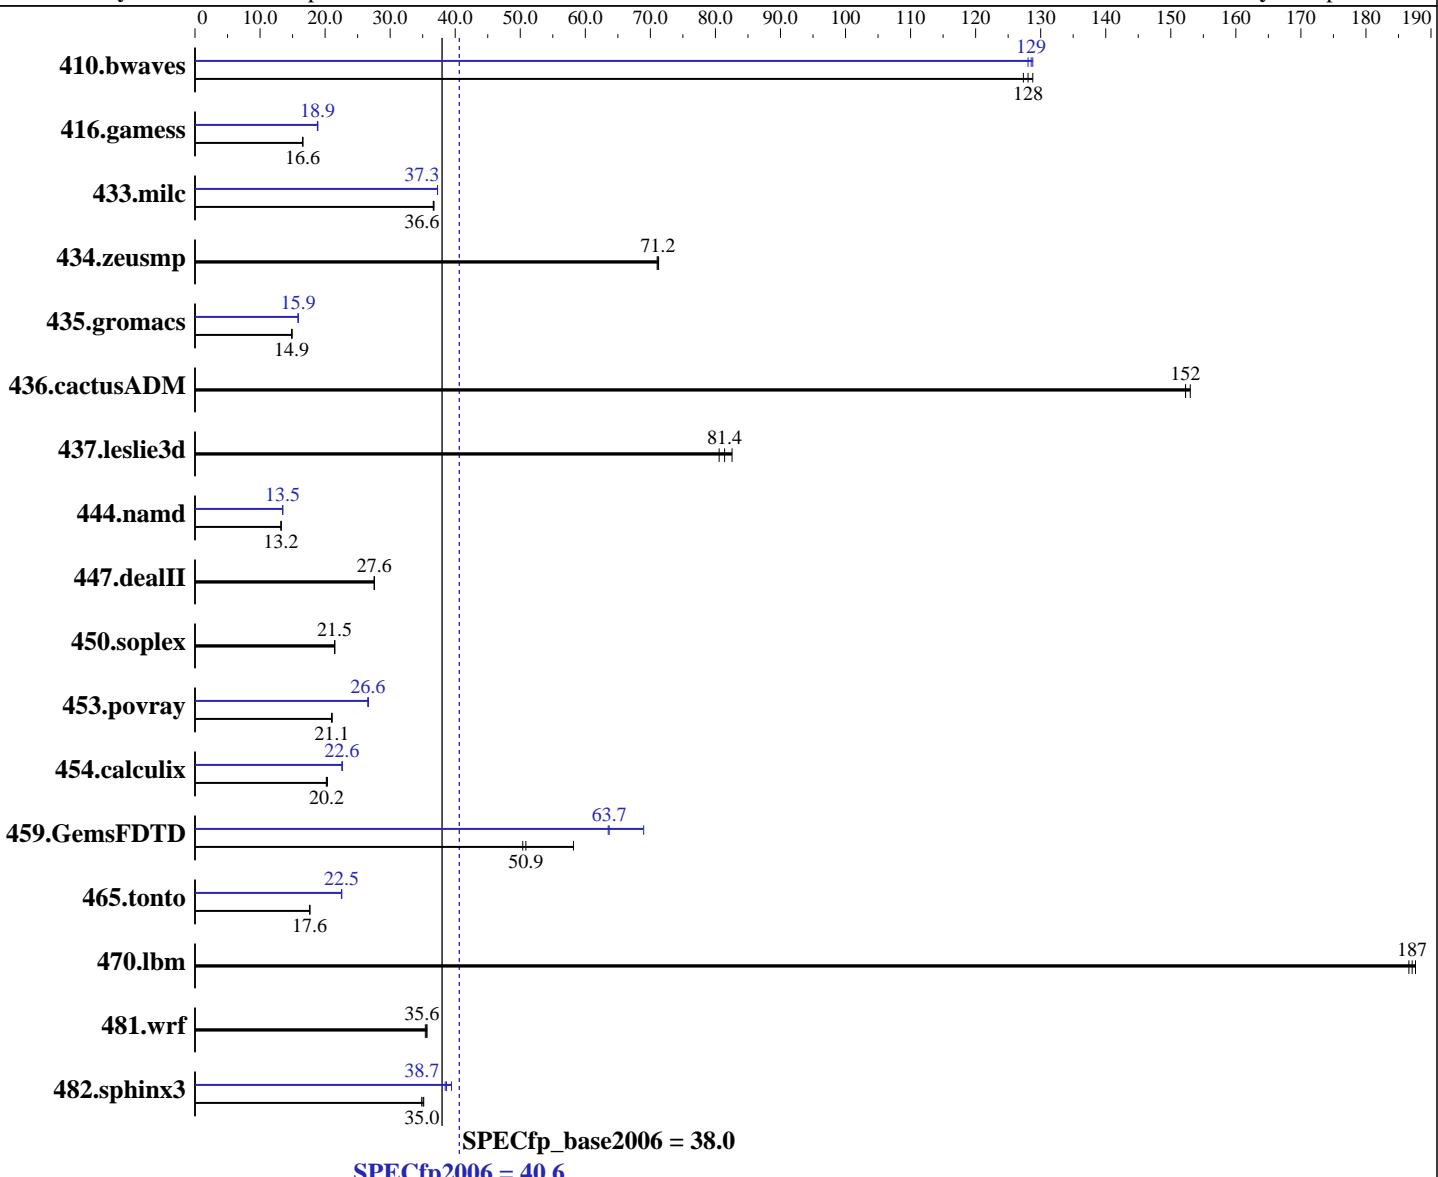

Hardware

CPU Name: Intel Xeon E5607
 CPU Characteristics:
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation		SPECfp2006 = 40.6	
IBM System x3630 M3 (Intel Xeon E5607)		SPECfp_base2006 = 38.0	
CPU2006 license:	11	Test date:	Apr-2011
Test sponsor:	IBM Corporation	Hardware Availability:	Feb-2011
Tested by:	IBM Corporation	Software Availability:	Apr-2011
L3 Cache:	8 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz)		
Disk Subsystem:	1 x 146 GB SAS, 15000 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	107	127	<u>106</u>	<u>128</u>	106	129	<u>106</u>	<u>128</u>	<u>106</u>	<u>129</u>	106	129
416.gamess	1181	16.6	<u>1182</u>	<u>16.6</u>	1183	16.6	<u>1041</u>	<u>18.8</u>	<u>1037</u>	<u>18.9</u>	<u>1038</u>	<u>18.9</u>
433.milc	<u>250</u>	<u>36.6</u>	251	36.6	250	36.7	<u>246</u>	<u>37.3</u>	<u>246</u>	<u>37.3</u>	<u>246</u>	<u>37.3</u>
434.zeusmp	<u>128</u>	<u>71.2</u>	128	71.0	128	71.3	<u>128</u>	<u>71.2</u>	128	71.0	128	71.3
435.gromacs	481	14.8	478	14.9	<u>480</u>	<u>14.9</u>	<u>450</u>	<u>15.9</u>	450	15.9	450	15.9
436.cactusADM	78.1	153	78.5	152	<u>78.5</u>	<u>152</u>	<u>78.1</u>	<u>153</u>	<u>78.5</u>	<u>152</u>	<u>78.5</u>	<u>152</u>
437.leslie3d	117	80.6	114	82.6	<u>115</u>	<u>81.4</u>	<u>117</u>	<u>80.6</u>	114	82.6	<u>115</u>	<u>81.4</u>
444.namd	606	13.2	606	13.2	<u>606</u>	<u>13.2</u>	<u>595</u>	<u>13.5</u>	595	13.5	595	13.5
447.dealII	415	27.6	<u>415</u>	<u>27.6</u>	415	27.6	<u>415</u>	<u>27.6</u>	<u>415</u>	<u>27.6</u>	415	27.6
450.soplex	<u>388</u>	<u>21.5</u>	388	21.5	389	21.5	<u>388</u>	<u>21.5</u>	388	21.5	389	21.5
453.povray	252	21.1	254	21.0	<u>253</u>	<u>21.1</u>	200	26.7	<u>200</u>	<u>26.6</u>	200	26.6
454.calculix	<u>407</u>	<u>20.2</u>	409	20.2	405	20.4	<u>365</u>	<u>22.6</u>	365	22.6	365	22.6
459.GemsFDTD	<u>209</u>	<u>50.9</u>	182	58.2	211	50.4	<u>154</u>	<u>69.0</u>	<u>167</u>	<u>63.7</u>	167	63.5
465.tonto	557	17.7	<u>558</u>	<u>17.6</u>	559	17.6	<u>436</u>	<u>22.6</u>	<u>437</u>	<u>22.5</u>	<u>437</u>	<u>22.5</u>
470.lbm	<u>73.4</u>	<u>187</u>	73.2	188	73.6	187	<u>73.4</u>	<u>187</u>	73.2	188	73.6	187
481.wrf	<u>314</u>	<u>35.6</u>	313	35.7	315	35.4	<u>314</u>	<u>35.6</u>	313	35.7	315	35.4
482.sphinx3	554	35.2	<u>556</u>	<u>35.0</u>	559	34.8	<u>504</u>	<u>38.7</u>	<u>507</u>	<u>38.5</u>	<u>494</u>	<u>39.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Power C-State enabled in BIOS
Data Reuse disabled in BIOS
Demand Scrub disabled in BIOS



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	40.6
IBM System x3630 M3 (Intel Xeon E5607)	SPECfp_base2006 =	38.0
CPU2006 license: 11	Test date:	Apr-2011
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2011
Tested by: IBM Corporation	Software Availability:	Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores
Binaries compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 40.6

IBM System x3630 M3 (Intel Xeon E5607)

SPECfp_base2006 = 38.0

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	40.6
IBM System x3630 M3 (Intel Xeon E5607)	SPECfp_base2006 =	38.0
CPU2006 license: 11	Test date:	Apr-2011
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2011
Tested by: IBM Corporation	Software Availability:	Apr-2011

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xsSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
 -static

416.gamess: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -opt-prefetch -parallel
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
 -opt-malloc-options=3 -auto -unroll14
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xsSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 40.6

IBM System x3630 M3 (Intel Xeon E5607)

SPECfp_base2006 = 38.0

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 18:55:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 April 2011.