



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 369

PowerEdge R910 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 343

CPU2006 license: 55


Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

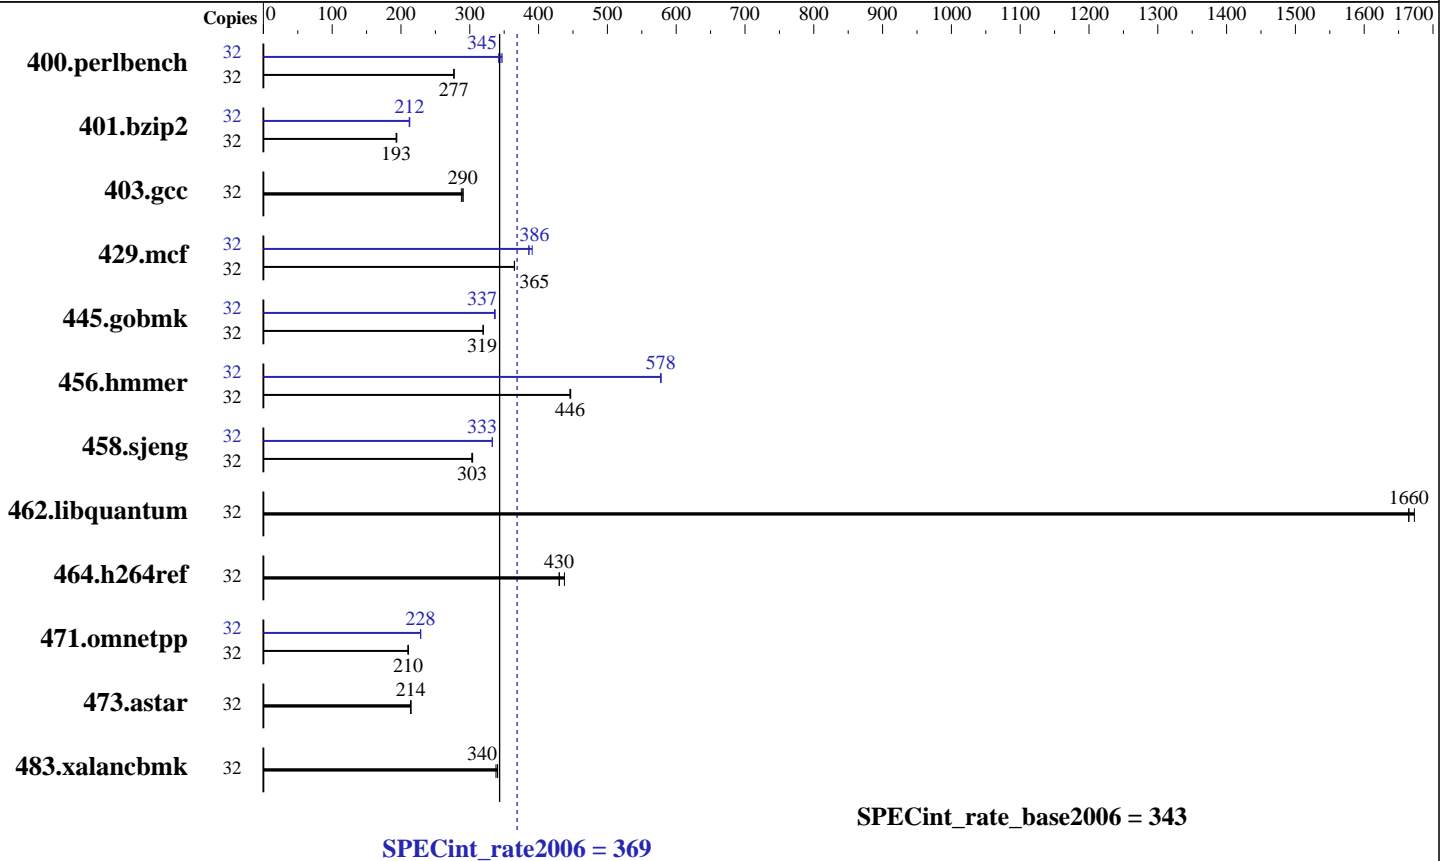

Hardware

CPU Name: Intel Xeon E7-4820
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 978 MHz)
 Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 369

PowerEdge R910 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 343

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1128	277	1130	277	<u>1129</u>	<u>277</u>	32	901	347	<u>905</u>	<u>345</u>	914	342
401.bzip2	32	1592	194	1599	193	<u>1598</u>	<u>193</u>	32	<u>1455</u>	<u>212</u>	1456	212	1451	213
403.gcc	32	887	290	<u>889</u>	<u>290</u>	895	288	32	887	290	<u>889</u>	<u>290</u>	895	288
429.mcf	32	<u>800</u>	<u>365</u>	800	365	799	365	32	<u>756</u>	<u>386</u>	747	391	756	386
445.gobmk	32	1050	320	1051	319	<u>1051</u>	<u>319</u>	32	997	337	1000	336	<u>997</u>	<u>337</u>
456.hammer	32	668	447	670	446	<u>669</u>	<u>446</u>	32	516	578	<u>517</u>	<u>578</u>	517	578
458.sjeng	32	<u>1277</u>	<u>303</u>	1277	303	1273	304	32	<u>1163</u>	<u>333</u>	1163	333	1164	333
462.libquantum	32	<u>398</u>	<u>1660</u>	398	1660	396	1670	32	<u>398</u>	<u>1660</u>	398	1660	396	1670
464.h264ref	32	1647	430	1618	438	<u>1647</u>	<u>430</u>	32	1647	430	1618	438	<u>1647</u>	<u>430</u>
471.omnetpp	32	948	211	<u>951</u>	<u>210</u>	951	210	32	874	229	876	228	<u>876</u>	<u>228</u>
473.astar	32	1049	214	<u>1048</u>	<u>214</u>	1048	214	32	1049	214	<u>1048</u>	<u>214</u>	1048	214
483.xalancbmk	32	649	340	653	338	<u>649</u>	<u>340</u>	32	649	340	653	338	<u>649</u>	<u>340</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 28800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R910 model. Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 369

PowerEdge R910 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 343

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 369

PowerEdge R910 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 343

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 369

PowerEdge R910 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 343

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110517.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110517.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:41:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 May 2011.