



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 31.0

PowerEdge M910 (Intel Xeon E7-2850, 2.00 GHz)

SPECint_base2006 = 28.7

CPU2006 license: 55


Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

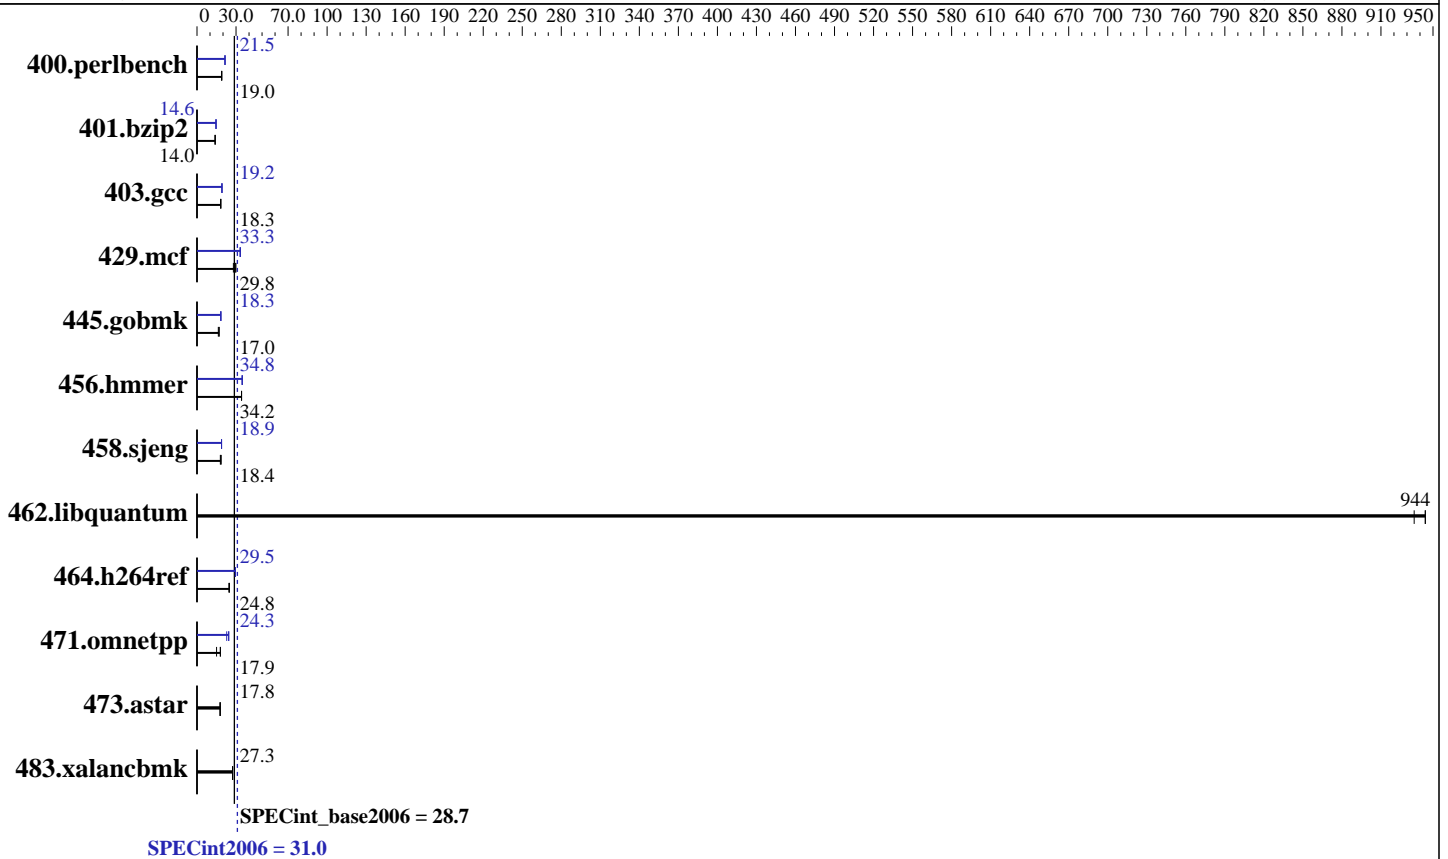

Hardware

CPU Name: Intel Xeon E7-2850
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3L-8500R-7, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 31.0

PowerEdge M910 (Intel Xeon E7-2850, 2.00 GHz)

SPECint_base2006 = 28.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	517	18.9	<u>514</u>	<u>19.0</u>	513	19.0	454	21.5	454	21.5	<u>454</u>	<u>21.5</u>
401.bzip2	692	14.0	691	14.0	<u>691</u>	<u>14.0</u>	660	14.6	<u>660</u>	<u>14.6</u>	661	14.6
403.gcc	441	18.3	441	18.3	<u>441</u>	<u>18.3</u>	422	19.1	418	19.2	<u>419</u>	<u>19.2</u>
429.mcf	306	29.8	326	28.0	<u>306</u>	<u>29.8</u>	275	33.1	273	33.4	<u>274</u>	<u>33.3</u>
445.gobmk	640	16.4	618	17.0	<u>618</u>	<u>17.0</u>	<u>573</u>	<u>18.3</u>	572	18.3	573	18.3
456.hammer	273	34.2	<u>272</u>	<u>34.2</u>	272	34.2	<u>268</u>	<u>34.8</u>	268	34.8	269	34.7
458.sjeng	<u>658</u>	<u>18.4</u>	674	17.9	654	18.5	<u>641</u>	<u>18.9</u>	641	18.9	641	18.9
462.libquantum	<u>21.9</u>	<u>944</u>	21.9	944	22.1	936	<u>21.9</u>	<u>944</u>	21.9	944	22.1	936
464.h264ref	<u>894</u>	<u>24.8</u>	889	24.9	899	24.6	<u>750</u>	<u>29.5</u>	749	29.6	750	29.5
471.omnetpp	348	18.0	416	15.0	<u>348</u>	<u>17.9</u>	256	24.4	274	22.8	<u>257</u>	<u>24.3</u>
473.astar	396	17.7	393	17.8	<u>394</u>	<u>17.8</u>	396	17.7	393	17.8	<u>394</u>	<u>17.8</u>
483.xalancbmk	<u>252</u>	<u>27.3</u>	252	27.4	253	27.3	<u>252</u>	<u>27.3</u>	252	27.4	253	27.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900> /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Logical Processor = Disabled (Default = Enabled)

General Notes

OMP_NUM_THREADS set to number of cores
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 31.0

PowerEdge M910 (Intel Xeon E7-2850, 2.00 GHz)

SPECint_base2006 = 28.7

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 31.0

PowerEdge M910 (Intel Xeon E7-2850, 2.00 GHz)

SPECint_base2006 = 28.7

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 456.hmmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -auto-ilp32 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 31.0

PowerEdge M910 (Intel Xeon E7-2850, 2.00 GHz)

SPECint_base2006 = 28.7

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 31.0

PowerEdge M910 (Intel Xeon E7-2850, 2.00 GHz)

SPECint_base2006 = 28.7

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:40:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 June 2011.