



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint<sup>®</sup>\_rate2006 = 295

NovaScale R440 F2 (Intel Xeon L5640, 2.26 GHz)

SPECint\_rate\_base2006 = 275

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

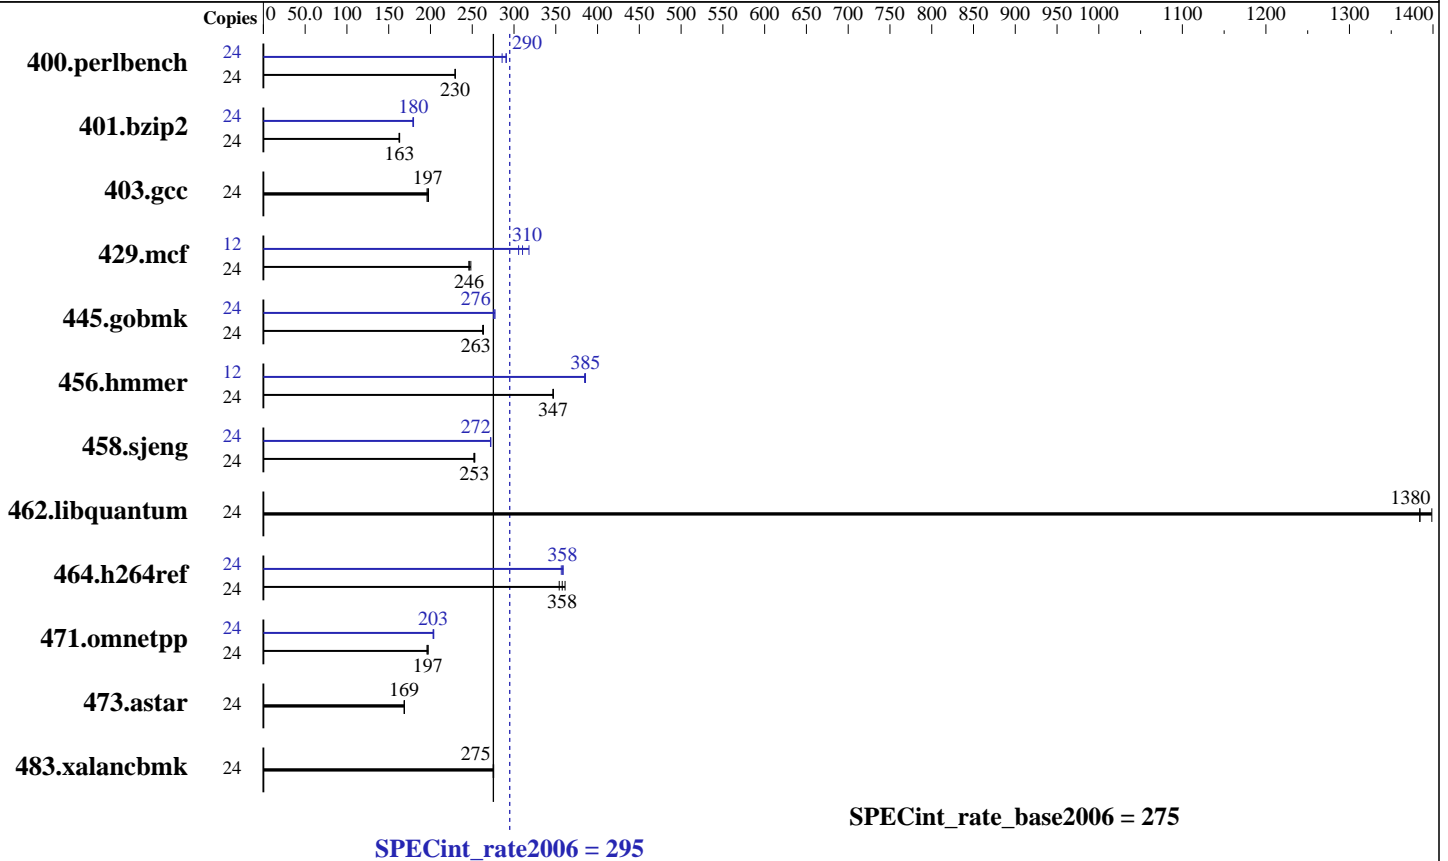

### Hardware

CPU Name: Intel Xeon L5640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 295

NovaScale R440 F2 (Intel Xeon L5640, 2.26 GHz)

SPECint\_rate\_base2006 = 275

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Apr-2011  
Hardware Availability: Mar-2010  
Software Availability: Jan-2011

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	1021	230	1022	230	<b>1021</b>	<b>230</b>	24	821	286	<b>807</b>	<b>290</b>	806	291		
401.bzip2	24	1426	162	<b>1423</b>	<b>163</b>	1420	163	24	1294	179	<b>1289</b>	<b>180</b>	1289	180		
403.gcc	24	<b>981</b>	<b>197</b>	977	198	986	196	24	<b>981</b>	<b>197</b>	977	198	986	196		
429.mcf	24	<b>888</b>	<b>246</b>	890	246	881	248	12	<b>353</b>	<b>310</b>	358	306	344	318		
445.gobmk	24	959	262	956	263	<b>956</b>	<b>263</b>	24	908	277	<b>911</b>	<b>276</b>	913	276		
456.hammer	24	646	347	<b>645</b>	<b>347</b>	645	347	12	291	385	<b>291</b>	<b>385</b>	290	386		
458.sjeng	24	1153	252	<b>1149</b>	<b>253</b>	1147	253	24	1067	272	1068	272	<b>1068</b>	<b>272</b>		
462.libquantum	24	356	1400	<b>359</b>	<b>1380</b>	359	1380	24	356	1400	<b>359</b>	<b>1380</b>	359	1380		
464.h264ref	24	1471	361	<b>1485</b>	<b>358</b>	1500	354	24	1489	357	1480	359	<b>1483</b>	<b>358</b>		
471.omnetpp	24	<b>763</b>	<b>197</b>	760	197	766	196	24	738	203	<b>738</b>	<b>203</b>	735	204		
473.astar	24	1000	169	998	169	<b>999</b>	<b>169</b>	24	1000	169	998	169	<b>999</b>	<b>169</b>		
483.xalancbmk	24	<b>601</b>	<b>275</b>	601	276	602	275	24	<b>601</b>	<b>275</b>	601	276	602	275		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
  
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages  
echo 10800 > /proc/sys/vm/nr\_hugepages  
export HUGETLB\_MORECORE=yes  
export LD\_PRELOAD=/usr/lib64/libhugetlbfs.so

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

The Dell PowerEdge R610 and the Bull NovaScale R440 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R610 model. Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 295**

NovaScale R440 F2 (Intel Xeon L5640, 2.26 GHz)

**SPECint\_rate\_base2006 = 275**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Apr-2011  
**Hardware Availability:** Mar-2010  
**Software Availability:** Jan-2011

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 295**

NovaScale R440 F2 (Intel Xeon L5640, 2.26 GHz)

**SPECint\_rate\_base2006 = 275**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Apr-2011  
**Hardware Availability:** Mar-2010  
**Software Availability:** Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 295**

NovaScale R440 F2 (Intel Xeon L5640, 2.26 GHz)

**SPECint\_rate\_base2006 = 275**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Apr-2011

**Hardware Availability:** Mar-2010

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/smartheap -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:12:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.