



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp®2006 = 47.2

PRIMERGY TX100 S3, Intel Core i3-2100, 3.10 GHz

SPECfp\_base2006 = 45.5

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

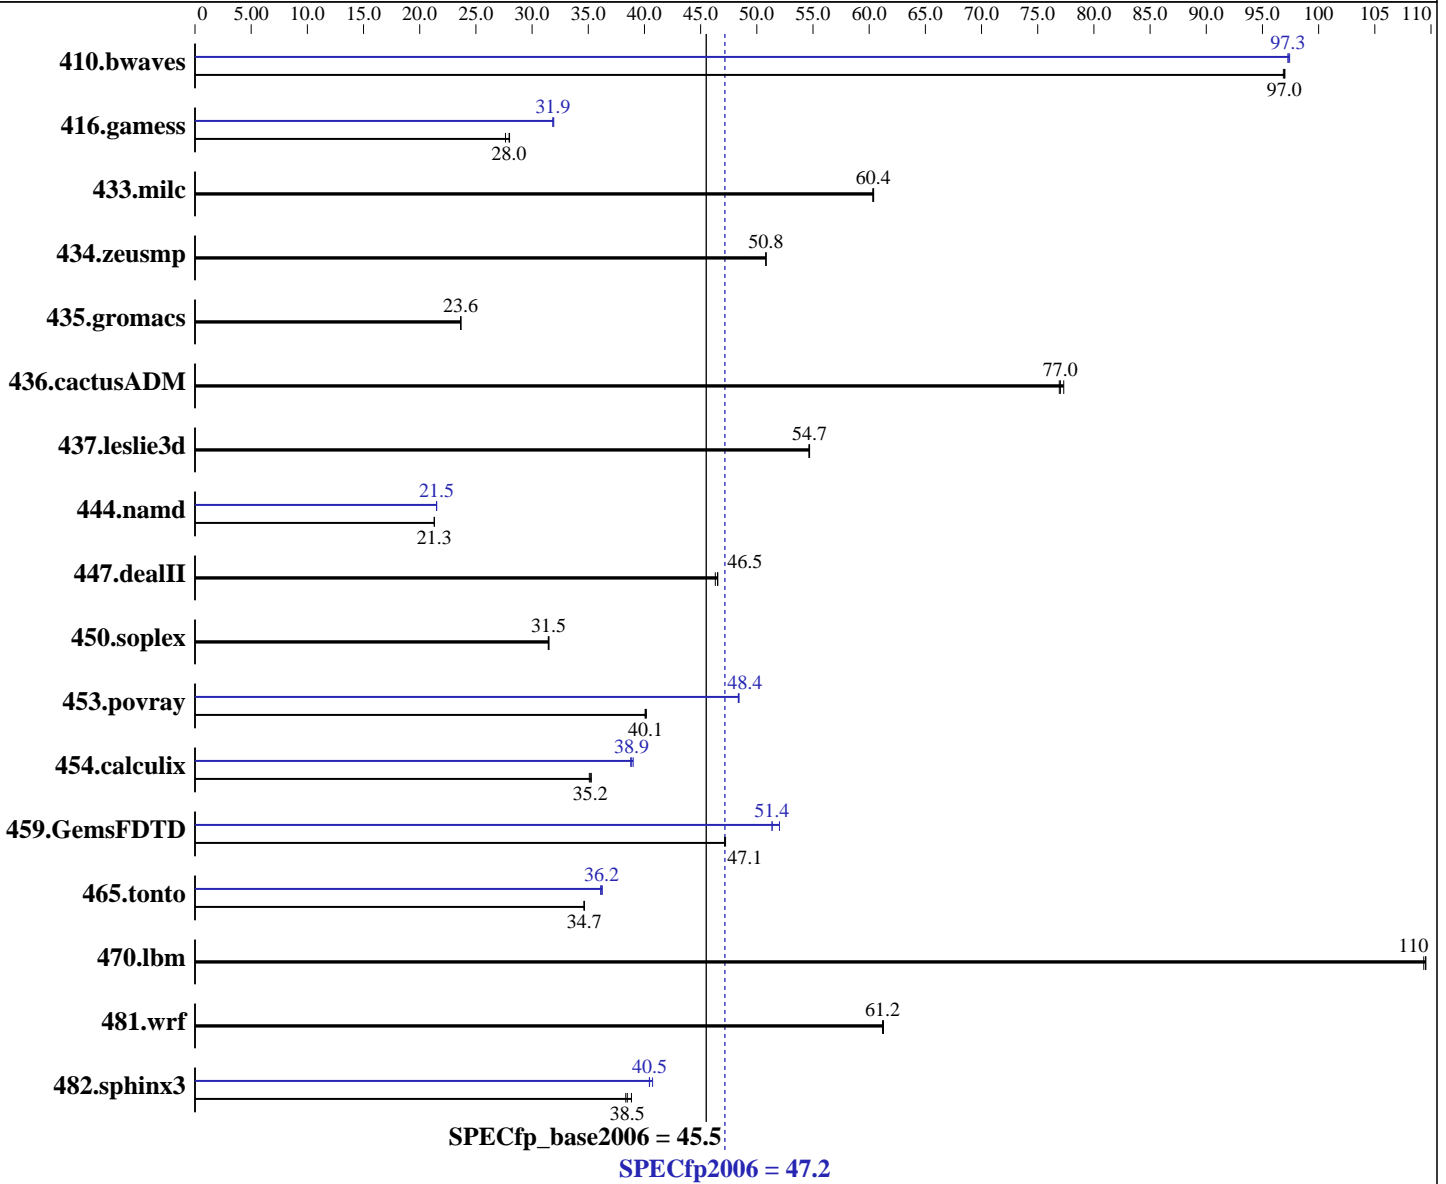

### Hardware

CPU Name: Intel Core i3-2100  
 CPU Characteristics:  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **47.2**

PRIMERGY TX100 S3, Intel Core i3-2100, 3.10 GHz

SPECfp\_base2006 = **45.5**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	140	96.9	<b>140</b>	<b>97.0</b>	140	97.0	139	97.4	140	97.3	<b>140</b>	<b>97.3</b>
416.gamess	709	27.6	699	28.0	<b>700</b>	<b>28.0</b>	<b>615</b>	<b>31.9</b>	615	31.9	613	31.9
433.milc	152	60.4	<b>152</b>	<b>60.4</b>	152	60.3	152	60.4	<b>152</b>	<b>60.4</b>	152	60.3
434.zeusmp	179	50.8	179	50.8	<b>179</b>	<b>50.8</b>	179	50.8	179	50.8	<b>179</b>	<b>50.8</b>
435.gromacs	<b>302</b>	<b>23.6</b>	302	23.7	302	23.6	<b>302</b>	<b>23.6</b>	302	23.7	302	23.6
436.cactusADM	155	77.3	155	76.9	<b>155</b>	<b>77.0</b>	155	77.3	155	76.9	<b>155</b>	<b>77.0</b>
437.leslie3d	172	54.6	172	54.7	<b>172</b>	<b>54.7</b>	172	54.6	172	54.7	<b>172</b>	<b>54.7</b>
444.namd	377	21.3	<b>377</b>	<b>21.3</b>	376	21.3	373	21.5	<b>373</b>	<b>21.5</b>	373	21.5
447.dealII	<b>246</b>	<b>46.5</b>	246	46.5	247	46.3	<b>246</b>	<b>46.5</b>	246	46.5	247	46.3
450.soplex	<b>265</b>	<b>31.5</b>	265	31.5	265	31.4	<b>265</b>	<b>31.5</b>	265	31.5	265	31.4
453.povray	132	40.2	<b>133</b>	<b>40.1</b>	133	40.1	110	48.4	110	48.4	<b>110</b>	<b>48.4</b>
454.calculix	<b>234</b>	<b>35.2</b>	235	35.1	234	35.3	212	39.0	213	38.8	<b>212</b>	<b>38.9</b>
459.GemsFDTD	225	47.2	<b>225</b>	<b>47.1</b>	225	47.1	<b>207</b>	<b>51.4</b>	204	52.0	207	51.4
465.tonto	284	34.6	<b>284</b>	<b>34.7</b>	284	34.7	273	36.1	271	36.2	<b>272</b>	<b>36.2</b>
470.lbm	126	109	<b>125</b>	<b>110</b>	125	110	126	109	<b>125</b>	<b>110</b>	125	110
481.wrf	182	61.3	183	61.2	<b>183</b>	<b>61.2</b>	182	61.3	183	61.2	<b>183</b>	<b>61.2</b>
482.sphinx3	<b>507</b>	<b>38.5</b>	508	38.3	502	38.8	479	40.7	482	40.4	<b>482</b>	<b>40.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'noddev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS configuration:  
Intel HT Technology = Disable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 47.2**

PRIMERGY TX100 S3, Intel Core i3-2100, 3.10 GHz

**SPECfp\_base2006 = 45.5**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Jun-2011  
**Hardware Availability:** Sep-2011  
**Software Availability:** Apr-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores  
For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 47.2**

PRIMERGY TX100 S3, Intel Core i3-2100, 3.10 GHz

**SPECfp\_base2006 = 45.5**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2011

**Hardware Availability:** Sep-2011

**Software Availability:** Apr-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

447.dealIII: `basepeak = yes`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 47.2**

PRIMERGY TX100 S3, Intel Core i3-2100, 3.10 GHz

**SPECfp\_base2006 = 45.5**

CPU2006 license: 19

Test date: Jun-2011

Test sponsor: Fujitsu

Hardware Availability: Sep-2011

Tested by: Fujitsu

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 47.2

PRIMERGY TX100 S3, Intel Core i3-2100, 3.10 GHz

SPECfp\_base2006 = 45.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 22:32:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 September 2011.