



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 319

PRIMERGY RX600 S6, Intel Xeon E7-8837, 2.67 GHz

SPECfp_rate_base2006 = 296

CPU2006 license: 19


Test date: Aug-2011

Test sponsor: Fujitsu

Hardware Availability: Jul-2011

Tested by: Fujitsu

Software Availability: Jul-2011

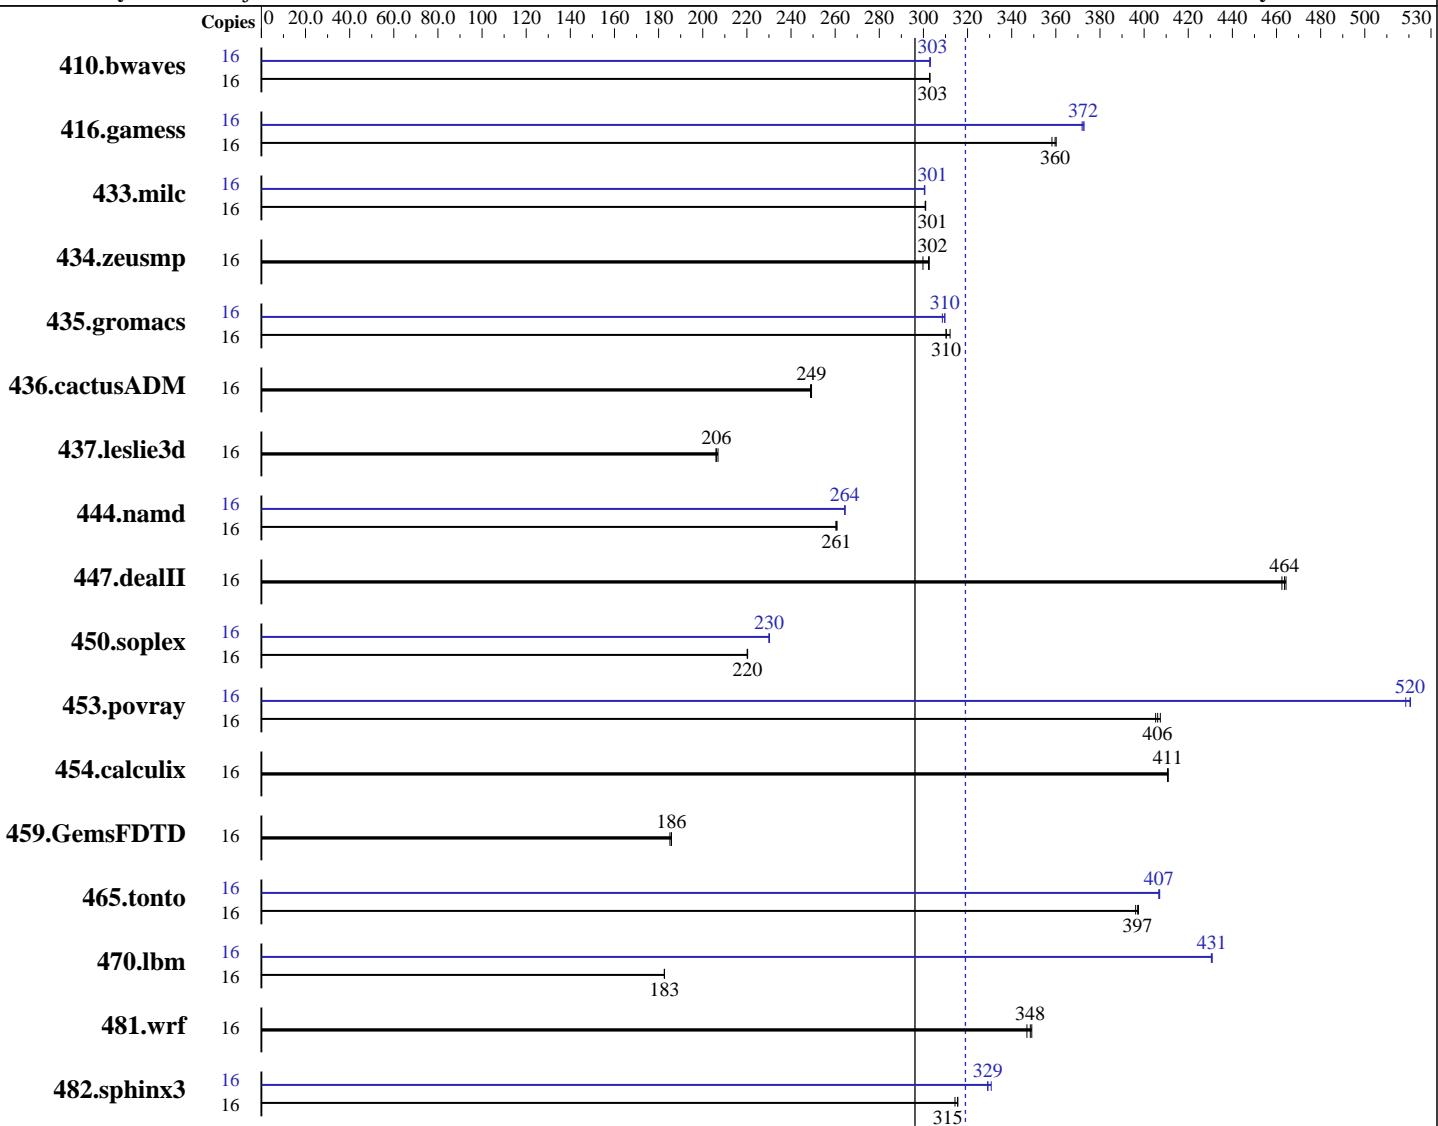

SPECfp_rate_base2006 = 296

SPECfp_rate2006 = 319

Hardware

CPU Name: Intel Xeon E7-8837
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.4.191 Build 20110427
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX600 S6, Intel Xeon E7-8837, 2.67 GHz

SPECfp_rate2006 = 319

SPECfp_rate_base2006 = 296

CPU2006 license: 19

Test date: Aug-2011

Test sponsor: Fujitsu

Hardware Availability: Jul-2011

Tested by: Fujitsu

Software Availability: Jul-2011

L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3L-8500R-7, ECC)
 Disk Subsystem: 1 x SAS, 600 GB, 10000 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	718	303	718	303	718	303	16	718	303	717	303	718	303
416.gamess	16	871	360	875	358	870	360	16	842	372	840	373	841	372
433.milc	16	488	301	488	301	488	301	16	489	301	489	301	489	300
434.zeusmp	16	481	303	482	302	486	300	16	481	303	482	302	486	300
435.gromacs	16	366	312	368	310	368	310	16	369	310	370	309	369	310
436.cactusADM	16	768	249	767	249	767	249	16	768	249	767	249	767	249
437.leslie3d	16	727	207	729	206	730	206	16	727	207	729	206	730	206
444.namd	16	493	260	492	261	492	261	16	485	264	485	264	485	264
447.dealII	16	394	464	395	464	396	462	16	394	464	395	464	396	462
450.soplex	16	606	220	606	220	606	220	16	580	230	580	230	580	230
453.povray	16	210	406	210	405	209	407	16	164	519	163	521	164	520
454.calculix	16	321	411	321	411	321	411	16	321	411	321	411	321	411
459.GemsFDTD	16	914	186	913	186	917	185	16	914	186	913	186	917	185
465.tonto	16	397	396	396	397	397	397	16	387	407	387	407	387	407
470.lbm	16	1203	183	1204	183	1204	183	16	510	431	511	430	510	431
481.wrf	16	512	349	513	348	515	347	16	512	349	513	348	515	347
482.sphinx3	16	992	314	988	315	988	316	16	948	329	947	329	943	331

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 14400 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX600 S6, Intel Xeon E7-8837, 2.67 GHz

SPECfp_rate2006 = 319

SPECfp_rate_base2006 = 296

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2011

Hardware Availability: Jul-2011

Software Availability: Jul-2011

Platform Notes

BIOS configuration:

Data Reuse Optimization = Disable

Performance/Power Setting = Traditional

General Notes

Binaries were compiled on RHEL5.5

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX600 S6, Intel Xeon E7-8837, 2.67 GHz

SPECfp_rate2006 = 319

SPECfp_rate_base2006 = 296

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2011

Hardware Availability: Jul-2011

Software Availability: Jul-2011

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX600 S6, Intel Xeon E7-8837, 2.67 GHz

SPECfp_rate2006 = 319

SPECfp_rate_base2006 = 296

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2011

Hardware Availability: Jul-2011

Software Availability: Jul-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbf / -Wl,-hugetlbf-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbf / -Wl,-melf_x86_64 -Wl,-hugetlbf-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX600 S6, Intel Xeon E7-8837, 2.67 GHz

SPECfp_rate2006 = 319

SPECfp_rate_base2006 = 296

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2011

Hardware Availability: Jul-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
           -inline-calloc -opt-malloc-options=3
           -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
              -static -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20110705.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20110705.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:37:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 September 2011.