



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 40.1

IBM System x3100 M4 (Intel Core i3-2100)

SPECint_base2006 = 38.2

CPU2006 license: 11


Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

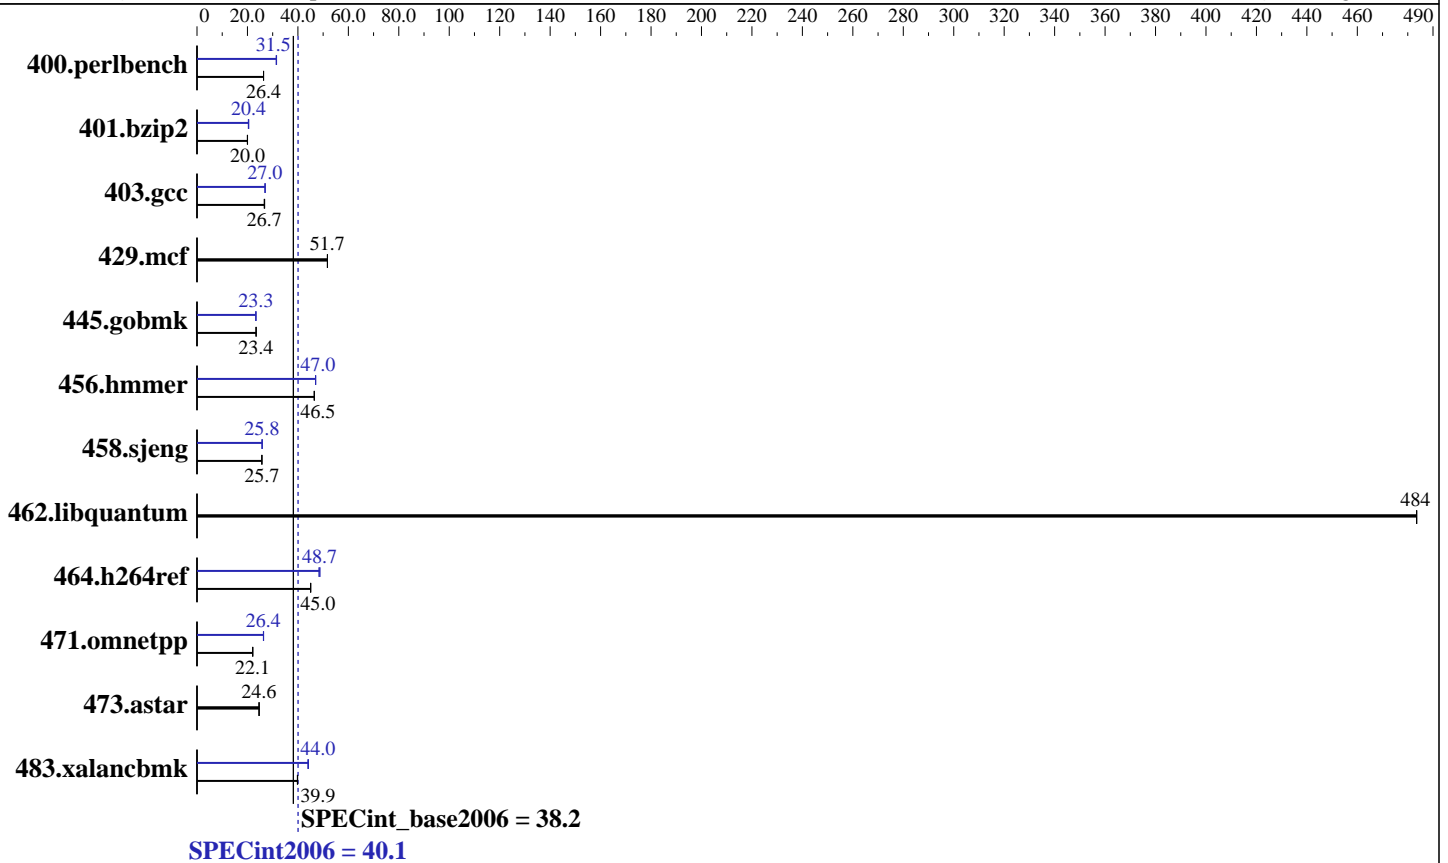

Hardware

CPU Name: Intel Core i3-2100
 CPU Characteristics:
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel Compiler XE Build 20110803
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 40.1

IBM System x3100 M4 (Intel Core i3-2100)

SPECint_base2006 = 38.2

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	370	26.4	370	26.4	370	26.4	311	31.4	310	31.5	310	31.5
401.bzip2	482	20.0	484	20.0	482	20.0	470	20.5	474	20.3	472	20.4
403.gcc	300	26.8	302	26.7	301	26.7	298	27.0	298	27.0	298	27.0
429.mcf	176	51.7	176	51.7	176	51.7	176	51.7	176	51.7	176	51.7
445.gobmk	447	23.4	448	23.4	448	23.4	449	23.3	449	23.3	449	23.3
456.hammer	201	46.5	201	46.5	201	46.5	198	47.0	198	47.0	198	47.0
458.sjeng	470	25.7	471	25.7	470	25.7	468	25.8	469	25.8	468	25.8
462.libquantum	42.9	484	42.9	483	42.9	484	42.9	484	42.9	483	42.9	484
464.h264ref	492	45.0	490	45.1	492	45.0	455	48.7	454	48.7	458	48.3
471.omnetpp	282	22.1	283	22.1	283	22.1	237	26.3	237	26.4	237	26.4
473.astar	285	24.6	285	24.6	285	24.6	285	24.6	285	24.6	285	24.6
483.xalancbmk	173	39.9	173	39.9	173	39.8	157	44.0	156	44.2	157	44.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS Settings:
C-State enabled in BIOS

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/SPECcpu12.1/smartheap:/root/SPECcpu12.1/ic12.1-libs/ia32:/root/SPECcpu12.1/ic12.1-libs/intel64"

OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory
using RHEL5.5 with binutils-2.17.50.0.6-14.el5

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 40.1

IBM System x3100 M4 (Intel Core i3-2100)

SPECint_base2006 = 38.2

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 40.1

IBM System x3100 M4 (Intel Core i3-2100)

SPECint_base2006 = 38.2

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
            -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
              -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
              -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 40.1

IBM System x3100 M4 (Intel Core i3-2100)

SPECint_base2006 = 38.2

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:23:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 December 2011.