



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 41.4

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECint_base2006 = 38.9

CPU2006 license: 9006


Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

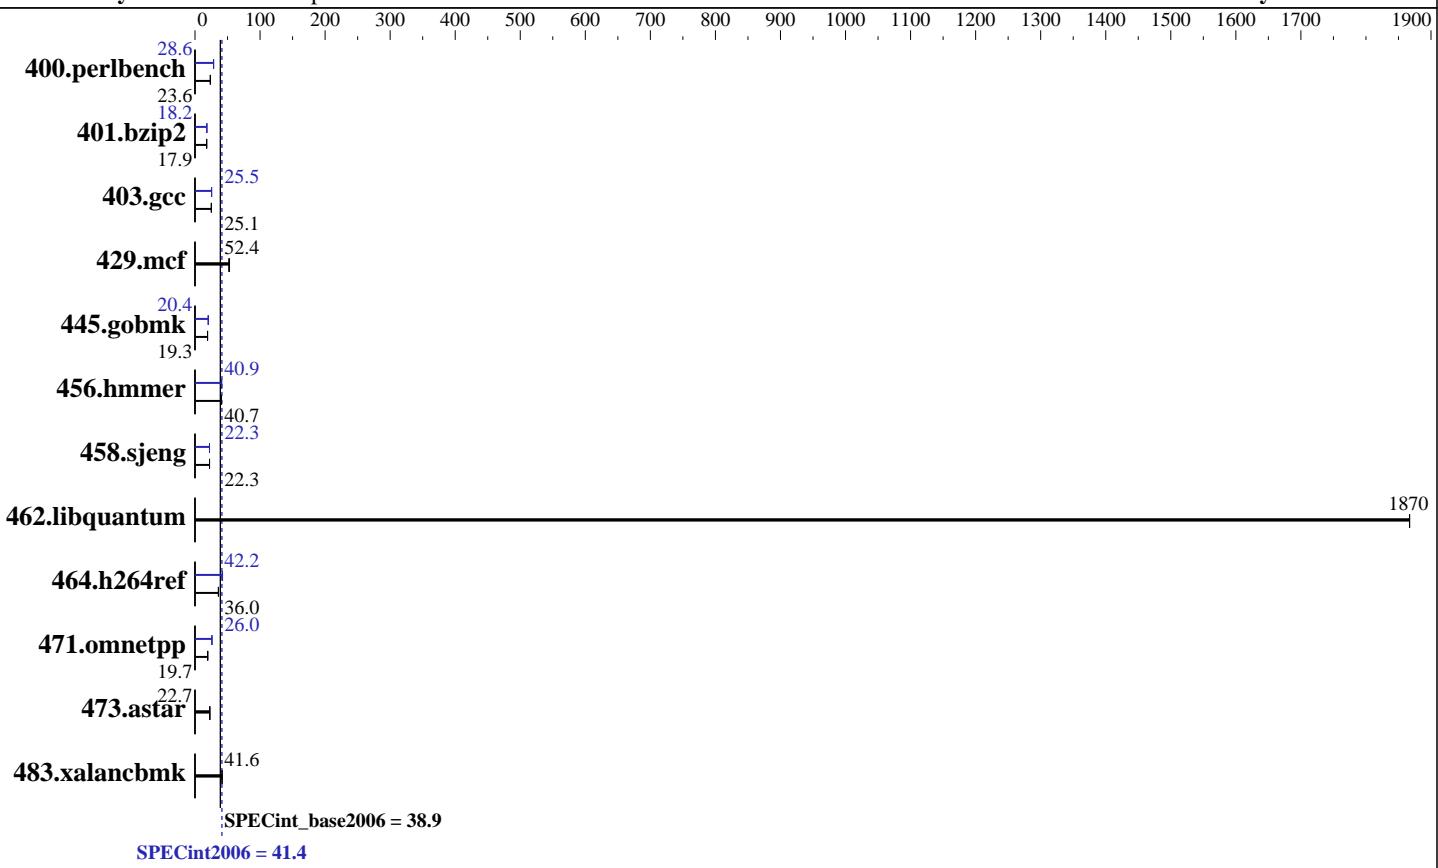

Hardware

CPU Name:	Intel Xeon E5-2430
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago)
	Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECint2006 = 41.4

SPECint_base2006 = 38.9

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	414	23.6	414	23.6	414	23.6	342	28.6	342	28.6	342	28.6
401.bzip2	536	18.0	539	17.9	540	17.9	531	18.2	531	18.2	531	18.2
403.gcc	320	25.2	320	25.1	320	25.1	316	25.5	315	25.5	315	25.5
429.mcf	175	52.0	174	52.4	172	53.1	175	52.0	174	52.4	172	53.1
445.gobmk	543	19.3	543	19.3	543	19.3	515	20.4	515	20.4	514	20.4
456.hmmer	229	40.7	229	40.7	230	40.6	228	40.9	228	41.0	228	40.9
458.sjeng	542	22.3	541	22.4	542	22.3	543	22.3	543	22.3	543	22.3
462.libquantum	11.1	1870	11.1	1870	11.1	1870	11.1	1870	11.1	1870	11.1	1870
464.h264ref	616	35.9	615	36.0	612	36.2	534	41.5	524	42.2	522	42.4
471.omnetpp	318	19.7	318	19.7	324	19.3	240	26.1	240	26.0	240	26.0
473.astar	310	22.6	310	22.7	305	23.0	310	22.6	310	22.7	305	23.0
483.xalancbmk	165	41.9	166	41.6	172	40.2	165	41.9	166	41.6	172	40.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

OMP_NUM_THREADS = "12"

The Express5800/R120d-1E and

the Express5800/R120d-2E models are electronically equivalent.

The results have been measured on the Express5800/R120d-1E model.

Added glibc-static-2.12-1.47.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECint2006 = 41.4

SPECint_base2006 = 38.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib64 -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECint2006 = 41.4

SPECint_base2006 = 38.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch`
`-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch`
`-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias`

456.hammer: `-xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`
`-ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECint2006 = 41.4

SPECint_base2006 = 38.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:33:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 June 2012.