



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp®\_rate2006 = 302**

**SPECfp\_rate\_base2006 = 295**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Feb-2012

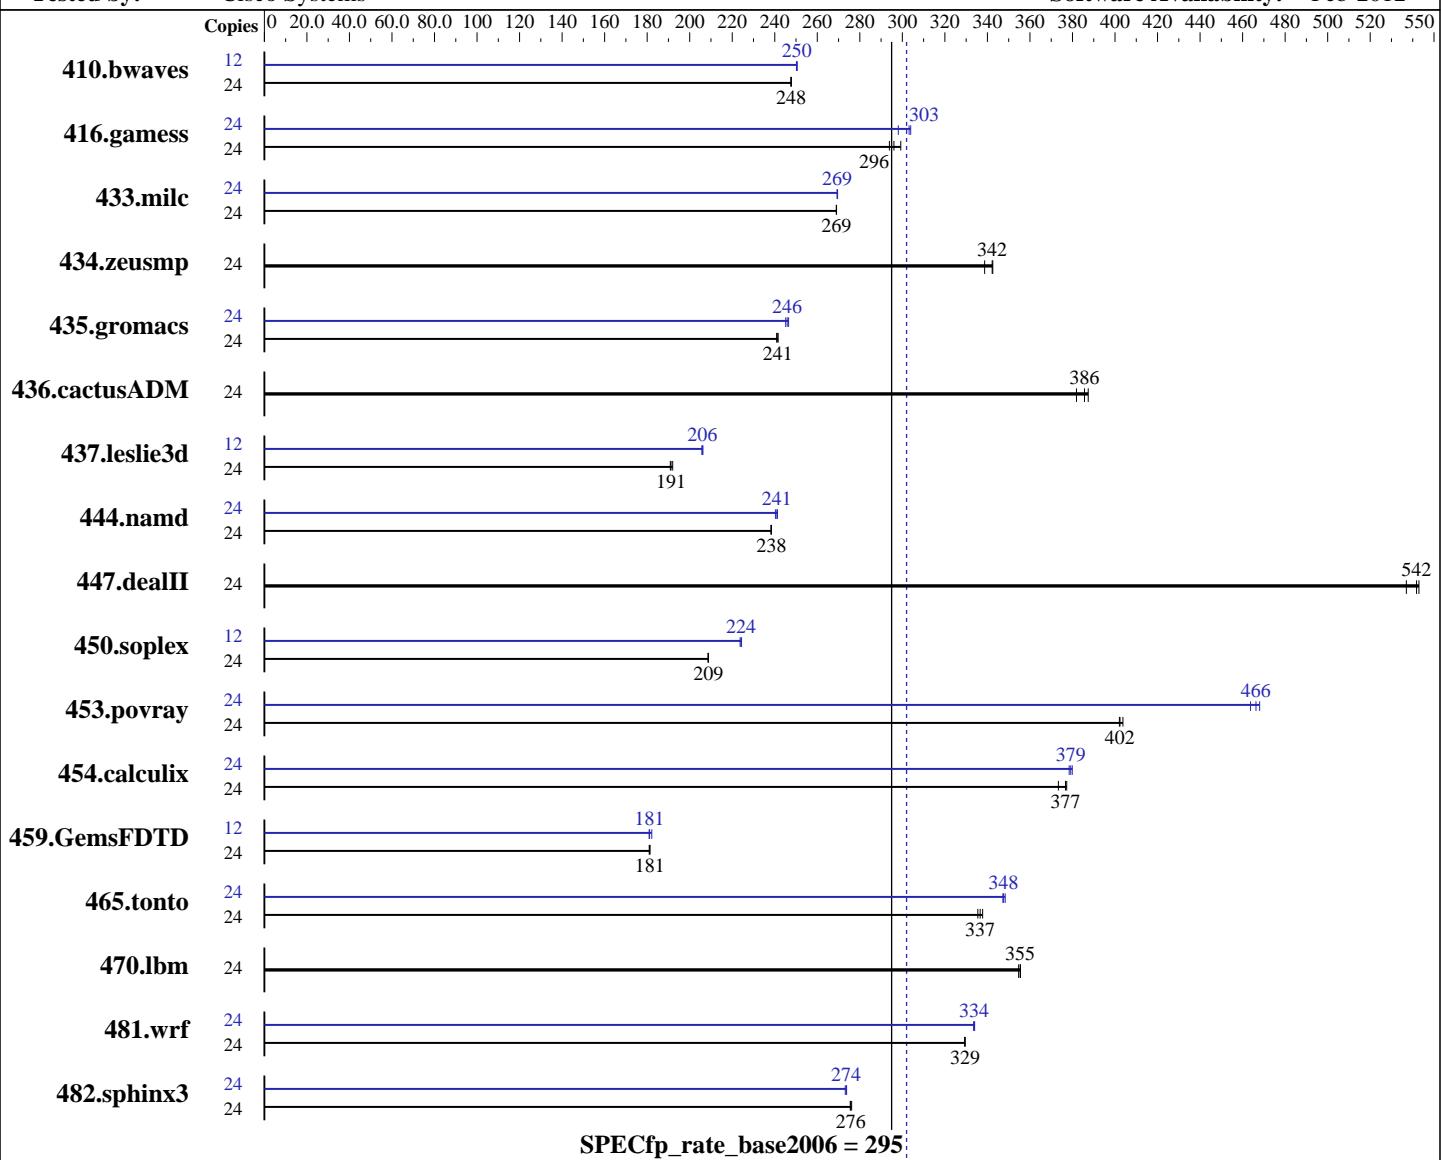

### Hardware

CPU Name: Intel Xeon E5-2430L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 No ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 302**

**SPECfp\_rate\_base2006 = 295**

**CPU2006 license:** 9019

**Test date:** Aug-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 X 146 GB 15000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>1316</b>	<b>248</b>	1316	248	1318	248	12	652	250	651	251	<b>651</b>	<b>250</b>		
416.gamess	24	1599	294	1570	299	<b>1587</b>	<b>296</b>	24	1576	298	<b>1550</b>	<b>303</b>	1546	304		
433.milc	24	<b>819</b>	<b>269</b>	819	269	819	269	24	818	269	817	270	<b>818</b>	<b>269</b>		
434.zeusmp	24	<b>638</b>	<b>342</b>	645	339	638	343	24	<b>638</b>	<b>342</b>	645	339	638	343		
435.gromacs	24	<b>710</b>	<b>241</b>	711	241	709	242	24	<b>697</b>	<b>246</b>	695	247	699	245		
436.cactusADM	24	740	387	<b>744</b>	<b>386</b>	751	382	24	740	387	<b>744</b>	<b>386</b>	751	382		
437.leslie3d	24	1175	192	1182	191	<b>1180</b>	<b>191</b>	12	547	206	548	206	<b>548</b>	<b>206</b>		
444.namd	24	807	238	<b>807</b>	<b>238</b>	808	238	24	<b>799</b>	<b>241</b>	801	240	798	241		
447.dealII	24	<b>507</b>	<b>542</b>	511	537	506	543	24	<b>507</b>	<b>542</b>	511	537	506	543		
450.soplex	24	<b>959</b>	<b>209</b>	959	209	959	209	12	447	224	446	224	<b>447</b>	<b>224</b>		
453.povray	24	318	402	<b>317</b>	<b>402</b>	316	404	24	273	468	275	464	<b>274</b>	<b>466</b>		
454.calculix	24	530	373	525	377	<b>526</b>	<b>377</b>	24	521	380	523	378	<b>522</b>	<b>379</b>		
459.GemsFDTD	24	1405	181	<b>1405</b>	<b>181</b>	1407	181	12	<b>703</b>	<b>181</b>	699	182	704	181		
465.tonto	24	704	335	699	338	<b>702</b>	<b>337</b>	24	<b>679</b>	<b>348</b>	680	347	678	348		
470.lbm	24	<b>928</b>	<b>355</b>	930	355	927	356	24	<b>928</b>	<b>355</b>	930	355	927	356		
481.wrf	24	<b>814</b>	<b>329</b>	814	329	814	329	24	<b>803</b>	<b>334</b>	804	333	803	334		
482.sphinx3	24	1694	276	<b>1697</b>	<b>276</b>	1698	275	24	1712	273	1708	274	<b>1710</b>	<b>274</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on localhost.localdomain Wed Aug 29 13:07:52 2012  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 302**

**SPECfp\_rate\_base2006 = 295**

**CPU2006 license:** 9019

**Test date:** Aug-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2430L 0 @ 2.00GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 6
        siblings : 12
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      99040980 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 29 13:06
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  134G   10G  118G   8%  /
```

Additional information from dmidecode:

```
Memory:
12x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 302**

**SPECfp\_rate\_base2006 = 295**

**CPU2006 license:** 9019

**Test date:** Aug-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Aug-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Intel HT Technology=enable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

Submitted\_by: "Sheshgiri I (shei)" <shei@cisco.com>

Submitted: Thu Sep 13 12:31:07 EDT 2012

Submission: cpu2006-20120903-24384.sub

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2430L, 2.00 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECfp\_rate2006 = 302**

**SPECfp\_rate\_base2006 = 295**

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Feb-2012

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: 

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: 

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: 

```
-DSPEC_CPU_LP64
```

  
416.gamess: 

```
-DSPEC_CPU_LP64
```

  
433.milc: 

```
-DSPEC_CPU_LP64
```

  
434.zeusmp: 

```
-DSPEC_CPU_LP64
```

  
435.gromacs: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
436.cactusADM: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
437.leslie3d: 

```
-DSPEC_CPU_LP64
```

  
444.namd: 

```
-DSPEC_CPU_LP64
```

  
447.dealII: 

```
-DSPEC_CPU_LP64
```

  
453.povray: 

```
-DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 302**

**SPECfp\_rate\_base2006 = 295**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xsSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
              -unroll12
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
           -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static
```

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
           -inline-level=0 -scalar-rep- -static
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 302**

**SPECfp\_rate\_base2006 = 295**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:19:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 September 2012.