



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp[®]_rate2006 = 154

ACTINA SOLAR 200 S5 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 178

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Dec-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

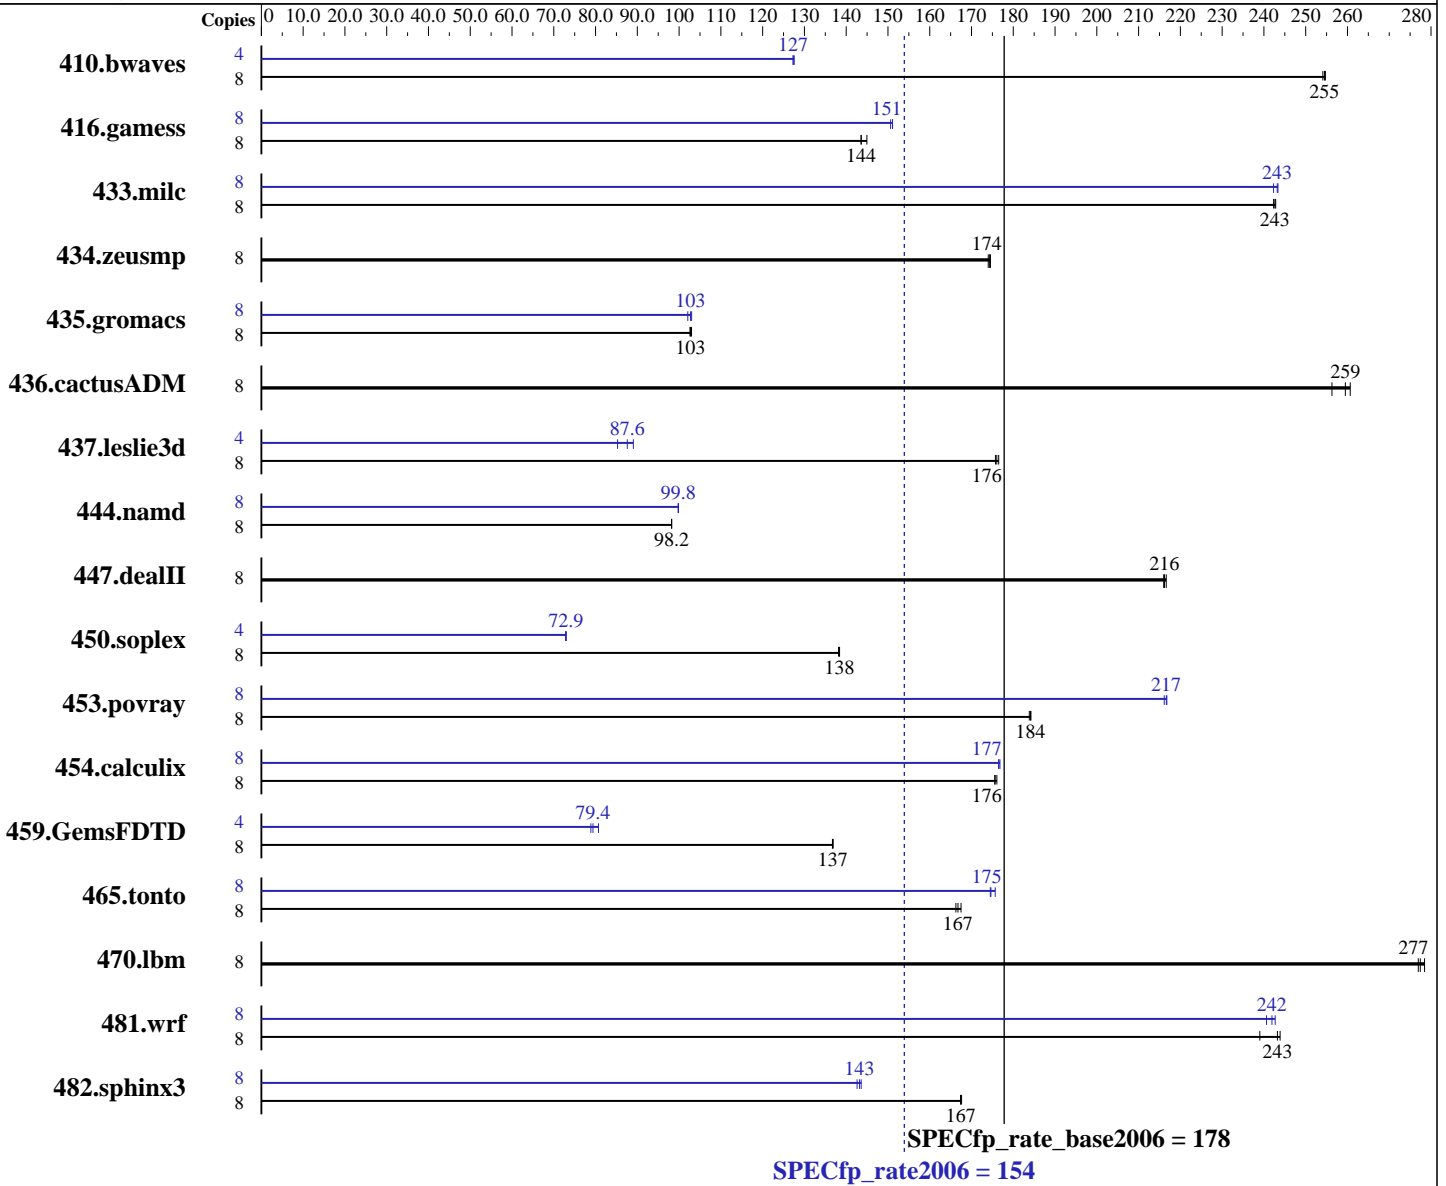

Hardware

CPU Name: Intel Xeon E5-2603
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 154

ACTINA SOLAR 200 S5 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 178

CPU2006 license: 9008

Test date: Dec-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	427	255	428	254	427	255	4	427	127	427	127	426	128		
416.gamess	8	1091	144	1091	144	1081	145	8	1040	151	1037	151	1037	151		
433.milc	8	303	242	302	243	303	243	8	302	243	303	242	302	243		
434.zeusmp	8	418	174	417	175	418	174	8	418	174	417	175	418	174		
435.gromacs	8	556	103	555	103	557	103	8	555	103	560	102	556	103		
436.cactusADM	8	373	256	367	261	368	259	8	373	256	367	261	368	259		
437.leslie3d	8	427	176	428	176	426	177	4	422	89.0	441	85.3	429	87.6		
444.namd	8	653	98.2	653	98.2	653	98.2	8	642	99.9	643	99.8	643	99.8		
447.dealII	8	423	216	422	217	424	216	8	423	216	422	217	424	216		
450.soplex	8	482	138	482	138	483	138	4	457	73.0	458	72.8	457	72.9		
453.povray	8	231	184	231	184	232	184	8	197	216	196	217	196	217		
454.calculix	8	376	176	376	176	375	176	8	374	177	373	177	374	177		
459.GemsFDTD	8	621	137	620	137	620	137	4	538	78.9	526	80.7	535	79.4		
465.tonto	8	470	167	473	166	472	167	8	451	175	451	175	448	176		
470.lbm	8	395	278	396	277	397	277	8	395	278	396	277	397	277		
481.wrf	8	367	243	374	239	366	244	8	369	242	371	241	368	243		
482.sphinx3	8	932	167	930	168	931	167	8	1089	143	1086	144	1093	143		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 154

ACTINA SOLAR 200 S5 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 178

CPU2006 license: 9008

Test date: Dec-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on SUT Sat Dec 22 01:22:38 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264521048 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux SUT 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012 (d73692b)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 21 14:07 last=S
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  1.6T   65G  1.5T   5% /
```

Additional information from dmidecode:

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 154

ACTINA SOLAR 200 S5 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 178

CPU2006 license: 9008

Test date: Dec-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 154

ACTINA SOLAR 200 S5 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 178

CPU2006 license: 9008

Test date: Dec-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

`410.bwaves: -DSPEC_CPU_LP64`

`416.gamess: -DSPEC_CPU_LP64`

`433.milc: -DSPEC_CPU_LP64`

`434.zeusmp: -DSPEC_CPU_LP64`

`435.gromacs: -DSPEC_CPU_LP64 -nofor_main`

`436.cactusADM: -DSPEC_CPU_LP64 -nofor_main`

`437.leslie3d: -DSPEC_CPU_LP64`

`444.namd: -DSPEC_CPU_LP64`

`447.deallI: -DSPEC_CPU_LP64`

`453.povray: -DSPEC_CPU_LP64`

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 154

ACTINA SOLAR 200 S5 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 178

CPU2006 license: 9008

Test date: Dec-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 154

ACTINA SOLAR 200 S5 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 178

CPU2006 license: 9008

Test date: Dec-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:50:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 January 2013.