



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2027R-72RFTP+ (X9DRW-7TPF+, Intel Xeon E5-2690)

SPECint®_rate2006 = 692

SPECint_rate_base2006 = 664

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2013

Hardware Availability: Feb-2013

Software Availability: Oct-2011

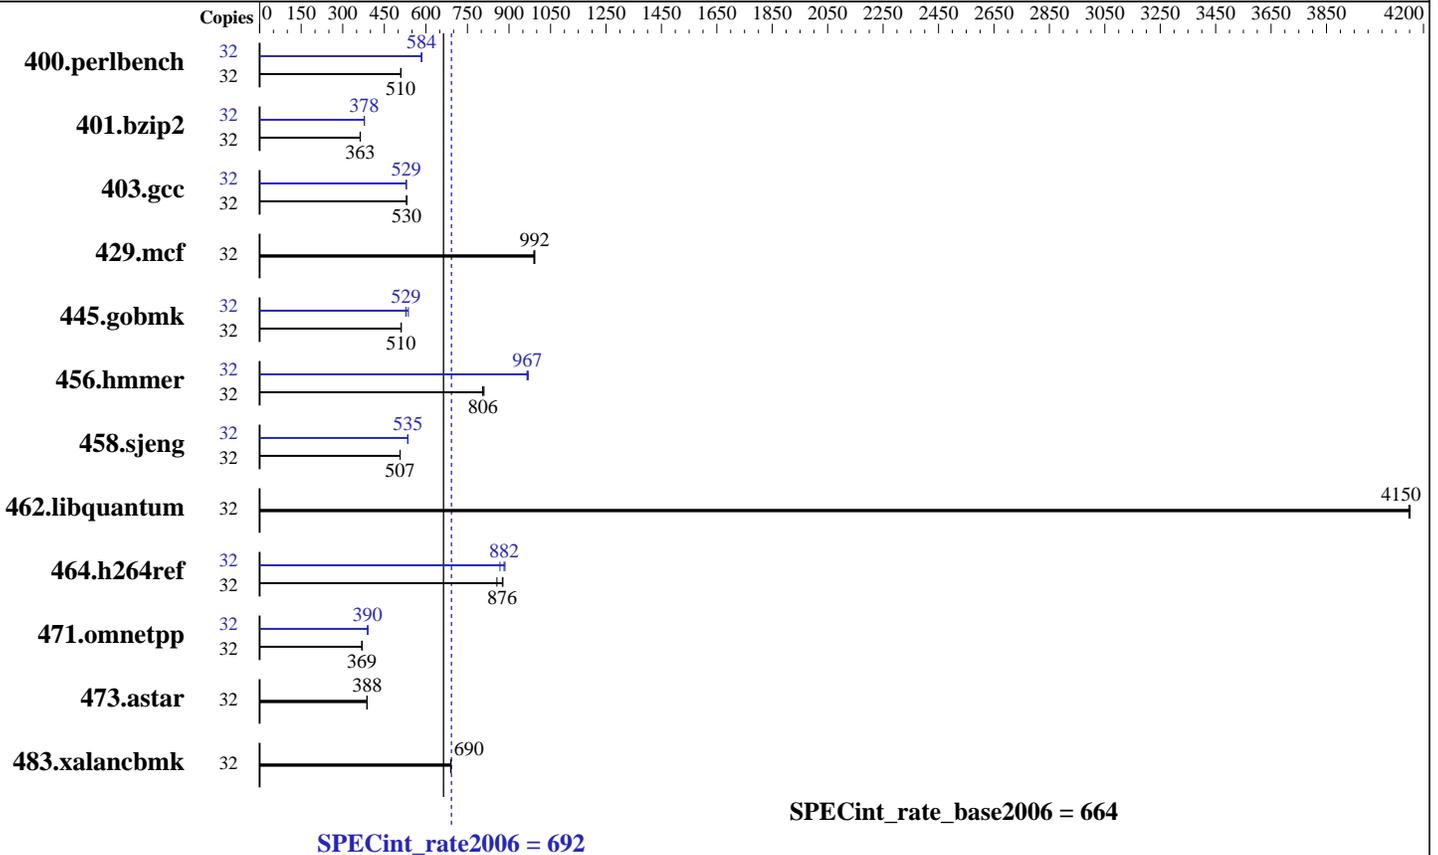

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x Toshiba MBF2600RC
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2027R-72RFTP+ (X9DRW-7TPF+, Intel Xeon E5-2690)

SPECint_rate2006 = 692

SPECint_rate_base2006 = 664

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Feb-2013
Hardware Availability: Feb-2013
Software Availability: Oct-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	613	510	614	510	613	510	32	535	584	534	586	536	583
401.bzip2	32	852	363	850	363	850	363	32	818	377	817	378	817	378
403.gcc	32	485	531	486	530	486	530	32	488	528	486	530	487	529
429.mcf	32	294	993	295	990	294	992	32	294	993	295	990	294	992
445.gobmk	32	658	510	658	510	656	511	32	635	529	625	537	636	528
456.hammer	32	371	805	369	810	370	806	32	308	969	309	967	309	965
458.sjeng	32	764	507	764	507	763	507	32	723	535	724	535	724	535
462.libquantum	32	160	4150	160	4150	160	4150	32	160	4150	160	4150	160	4150
464.h264ref	32	808	876	806	878	827	856	32	816	867	800	885	803	882
471.omnetpp	32	542	369	541	369	541	369	32	512	391	513	390	513	390
473.astar	32	580	387	579	388	579	388	32	580	387	579	388	579	388
483.xalancbmk	32	320	689	320	691	320	690	32	320	689	320	691	320	690

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2027R-72RFTP+ (X9DRW-7TPF+, Intel Xeon E5-2690)

SPECint_rate2006 = 692

SPECint_rate_base2006 = 664

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Feb-2013
Hardware Availability: Feb-2013
Software Availability: Oct-2011

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2027R-72RFTP+ (X9DRW-7TPF+, Intel Xeon E5-2690)

SPECint_rate2006 = 692

SPECint_rate_base2006 = 664

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2013

Hardware Availability: Feb-2013

Software Availability: Oct-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
 -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
 -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2027R-72RFTP+ (X9DRW-7TPF+, Intel Xeon E5-2690)

SPECint_rate2006 = 692

SPECint_rate_base2006 = 664

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Feb-2013
Hardware Availability: Feb-2013
Software Availability: Oct-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:13:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 March 2013.