



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp®2006 = **67.8**

ProLiant DL380p Gen8  
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECfp\_base2006 = **66.0**

CPU2006 license: 3


Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

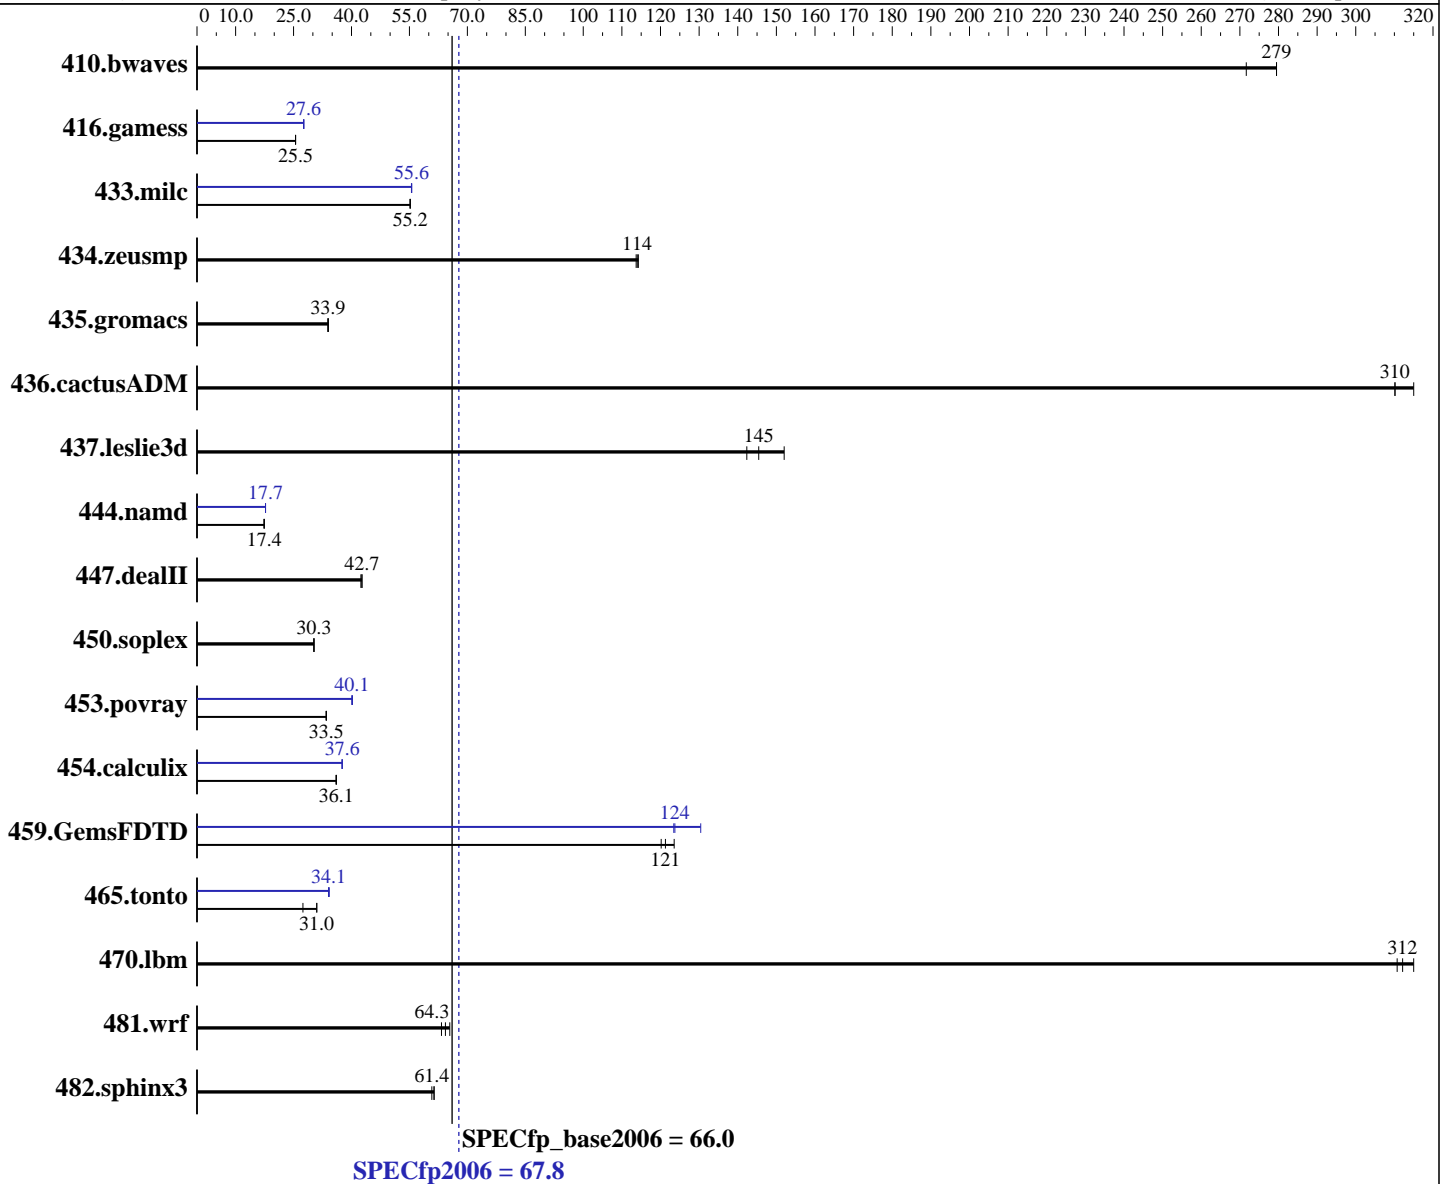

Hardware	
CPU Name:	Intel Xeon E5-2609 v2
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Software	
Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP3 Kernel 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **67.8**

ProLiant DL380p Gen8  
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECfp\_base2006 = **66.0**

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 1 x 146 GB 15 K SAS, RAID 0  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>48.6</b>	<b>279</b>	48.6	279	50.0	272	<b>48.6</b>	<b>279</b>	48.6	279	50.0	272
416.gamess	767	25.5	768	25.5	<b>767</b>	<b>25.5</b>	708	27.6	709	27.6	<b>709</b>	<b>27.6</b>
433.milc	166	55.2	166	55.2	<b>166</b>	<b>55.2</b>	<b>165</b>	<b>55.6</b>	165	55.6	165	55.5
434.zeusmp	79.6	114	80.0	114	<b>79.8</b>	<b>114</b>	79.6	114	80.0	114	<b>79.8</b>	<b>114</b>
435.gromacs	211	33.9	<b>210</b>	<b>33.9</b>	210	34.0	211	33.9	<b>210</b>	<b>33.9</b>	210	34.0
436.cactusADM	37.9	315	<b>38.5</b>	<b>310</b>	38.5	310	37.9	315	<b>38.5</b>	<b>310</b>	38.5	310
437.leslie3d	66.0	142	<b>64.6</b>	<b>145</b>	61.8	152	66.0	142	<b>64.6</b>	<b>145</b>	61.8	152
444.namd	<b>461</b>	<b>17.4</b>	461	17.4	461	17.4	452	17.7	452	17.7	<b>452</b>	<b>17.7</b>
447.dealII	268	42.7	270	42.4	<b>268</b>	<b>42.7</b>	268	42.7	270	42.4	<b>268</b>	<b>42.7</b>
450.soplex	276	30.3	275	30.3	<b>275</b>	<b>30.3</b>	276	30.3	275	30.3	<b>275</b>	<b>30.3</b>
453.povray	159	33.5	<b>159</b>	<b>33.5</b>	159	33.4	132	40.3	<b>133</b>	<b>40.1</b>	133	40.1
454.calculix	<b>229</b>	<b>36.1</b>	229	36.1	229	36.0	<b>220</b>	<b>37.6</b>	220	37.6	219	37.6
459.GemsFDTD	<b>87.5</b>	<b>121</b>	88.3	120	85.9	124	<b>85.8</b>	<b>124</b>	86.0	123	81.4	130
465.tonto	<b>317</b>	<b>31.0</b>	317	31.0	359	27.4	287	34.2	<b>288</b>	<b>34.1</b>	289	34.0
470.lbm	44.2	311	<b>44.0</b>	<b>312</b>	43.6	315	44.2	311	<b>44.0</b>	<b>312</b>	43.6	315
481.wrf	<b>174</b>	<b>64.3</b>	171	65.4	176	63.3	<b>174</b>	<b>64.3</b>	171	65.4	176	63.3
482.sphinx3	318	61.4	321	60.8	<b>318</b>	<b>61.4</b>	318	61.4	321	60.8	<b>318</b>	<b>61.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Reclaim mode enabled with:
  echo 1 > /proc/sys/vm/zone_reclaim_mode
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
  echo 1 > /proc/sys/vm/drop_caches
Disabled unused Linux services through "stop_services.sh" before running.
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = 67.8

ProLiant DL380p Gen8  
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECfp\_base2006 = 66.0

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

### Platform Notes

#### BIOS Configuration:

HP Power Profile set to Maximum Performance  
Minimum Processor Idle Power Core State set to C1E  
Minimum Processor Idle Power Package State set to C6 (retention)  
Energy/Performance Bias is set to Maximum Performance  
Memory Power Savings Mode set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
Dynamic Power Capping Functionality set to Disabled  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on dl380p-gen8-0s9 Wed Oct 16 16:02:24 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132130192 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux dl380p-gen8-0s9 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 16 15:49 last=S
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **67.8**

ProLiant DL380p Gen8  
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECfp\_base2006 = **66.0**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

### Platform Notes (Continued)

SPEC is set to: /cpu2006  
Filesystem      Type    Size    Used Avail Use% Mounted on  
/dev/sda1        ext3    135G    14G  121G  10% /

Additional information from dmidecode:

BIOS HP P70 09/08/2013  
Memory:  
16x HP 689911-071 8 GB 1333 MHz  
8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should read as the following:

16x HP 689911-071 8 GB 1333 MHz

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"  
OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 67.8**

ProLiant DL380p Gen8  
(2.50 GHz, Intel Xeon E5-2609 v2)

**SPECfp\_base2006 = 66.0**

**CPU2006 license:** 3

**Test date:** Oct-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 67.8**

ProLiant DL380p Gen8  
(2.50 GHz, Intel Xeon E5-2609 v2)

**SPECfp\_base2006 = 66.0**

**CPU2006 license:** 3

**Test date:** Oct-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 67.8**

ProLiant DL380p Gen8  
(2.50 GHz, Intel Xeon E5-2609 v2)

**SPECfp\_base2006 = 66.0**

**CPU2006 license:** 3

**Test date:** Oct-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 19:08:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 November 2013.