



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®_rate2006 = 239

Express5800/E120e-M (Intel Xeon E5-2407 v2)

SPECfp_rate_base2006 = 234

CPU2006 license: 9006


Test date: Apr-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

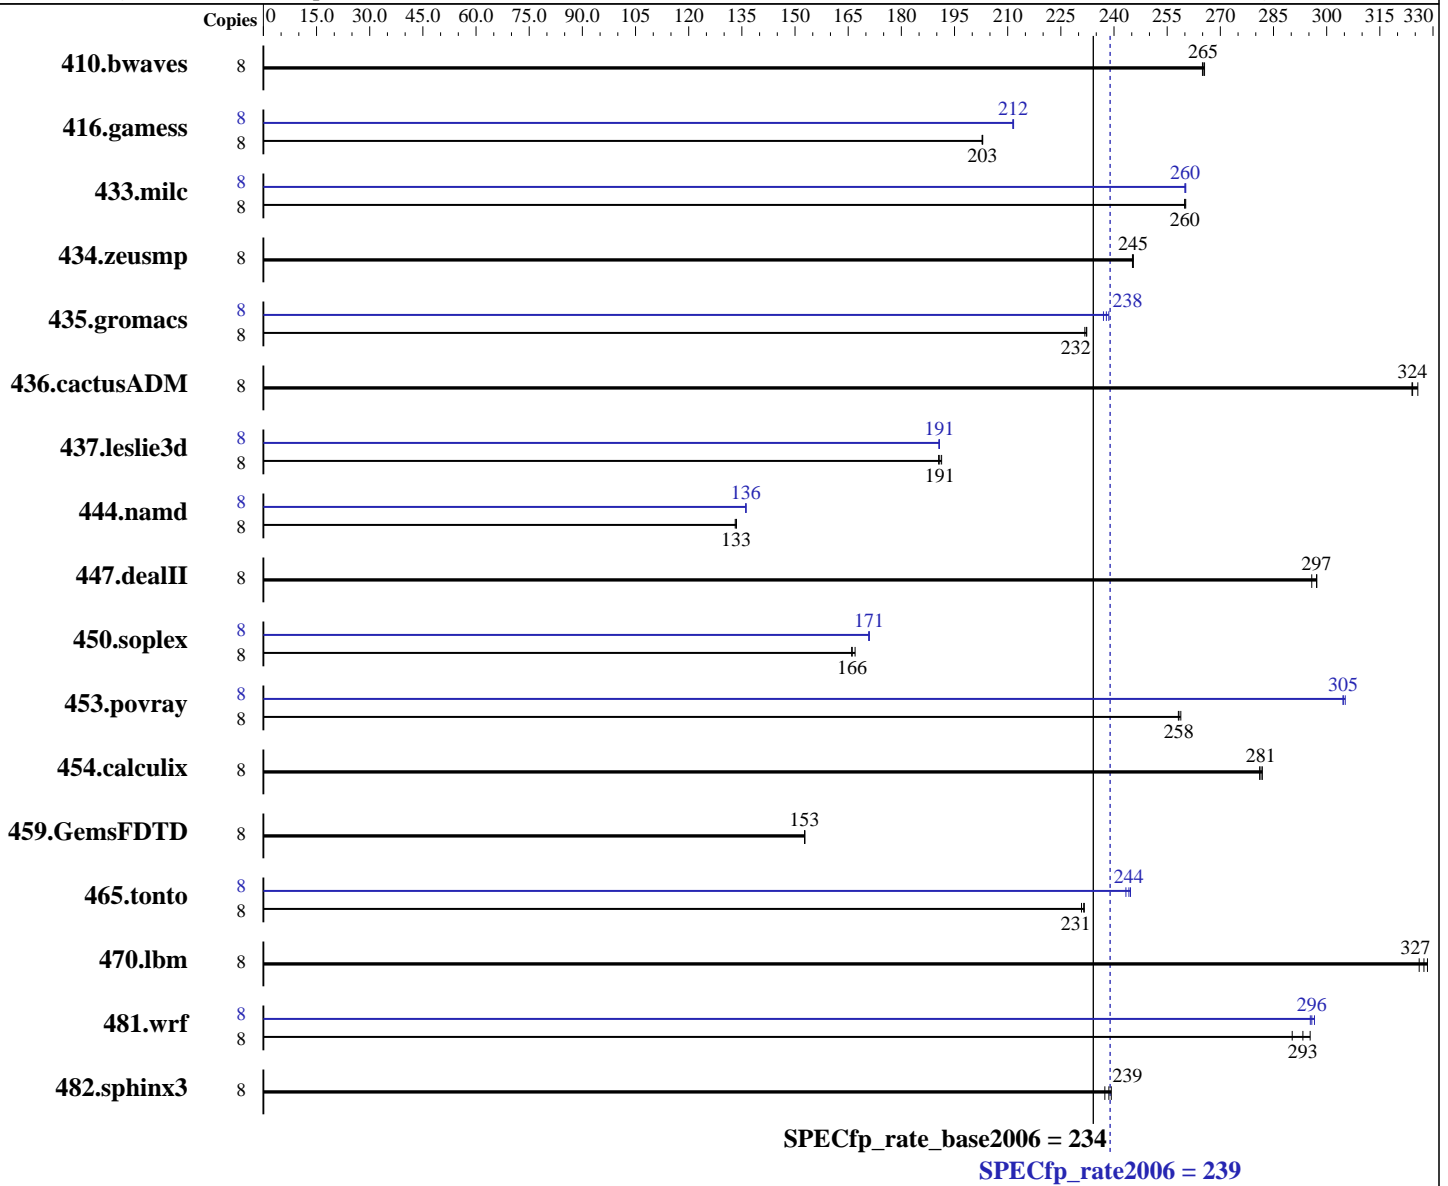

Hardware

CPU Name: Intel Xeon E5-2407 v2
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.23.2.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **239**

Express5800/E120e-M (Intel Xeon E5-2407 v2)

SPECfp_rate_base2006 = **234**

CPU2006 license: 9006

Test date: Apr-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	410	265	410	265	409	266	8	410	265	410	265	409	266
416.gamess	8	772	203	772	203	772	203	8	740	212	741	211	740	212
433.milc	8	283	260	282	260	282	260	8	282	260	282	260	282	260
434.zeusmp	8	297	245	297	245	297	245	8	297	245	297	245	297	245
435.gromacs	8	246	232	246	232	246	232	8	240	238	241	237	239	239
436.cactusADM	8	295	324	295	324	293	326	8	295	324	295	324	293	326
437.leslie3d	8	395	191	394	191	393	191	8	395	191	394	191	394	191
444.namd	8	481	133	482	133	481	133	8	471	136	471	136	471	136
447.dealII	8	309	296	308	297	308	297	8	309	296	308	297	308	297
450.soplex	8	400	167	402	166	402	166	8	390	171	391	171	390	171
453.povray	8	165	258	164	259	165	258	8	140	305	139	305	140	305
454.calculix	8	234	282	234	281	235	281	8	234	282	234	281	235	281
459.GemsFDTD	8	556	153	556	153	556	153	8	556	153	556	153	556	153
465.tonto	8	341	231	340	232	340	231	8	322	245	322	244	323	243
470.lbm	8	337	326	336	327	335	328	8	337	326	336	327	335	328
481.wrf	8	305	293	303	295	308	290	8	301	297	303	295	302	296
482.sphinx3	8	652	239	654	239	657	237	8	652	239	654	239	657	237

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Energy Performance: Performance
 Memory Voltage: 1.5 V



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 239

Express5800/E120e-M (Intel Xeon E5-2407 v2)

SPECfp_rate_base2006 = 234

CPU2006 license: 9006

Test date: Apr-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 239

Express5800/E120e-M (Intel Xeon E5-2407 v2)

SPECfp_rate_base2006 = 234

CPU2006 license: 9006

Test date: Apr-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 239

Express5800/E120e-M (Intel Xeon E5-2407 v2)

SPECfp_rate_base2006 = 234

CPU2006 license: 9006

Test date: Apr-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 239

Express5800/E120e-M (Intel Xeon E5-2407 v2)

SPECfp_rate_base2006 = 234

CPU2006 license: 9006

Test date: Apr-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:14:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 April 2014.