



# SPEC<sup>®</sup> CINT2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**  
**Huawei RH2288H v2**

**SPECint<sup>®</sup>\_rate2006 = 671**  
**SPECint\_rate\_base2006 = 648**

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

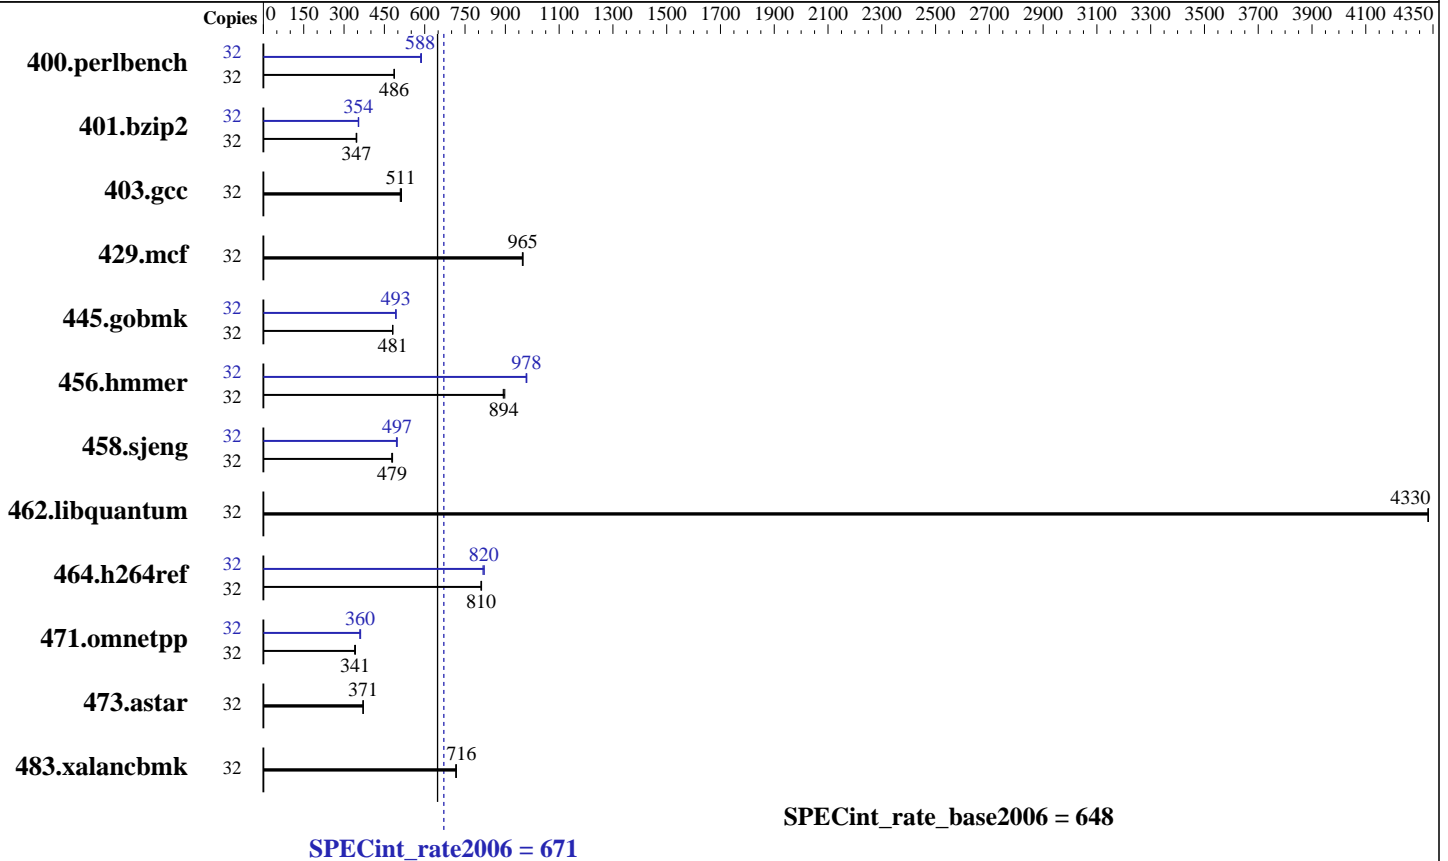

## Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei RH2288H v2

SPECint\_rate2006 = 671  
SPECint\_rate\_base2006 = 648

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	642	487	<b>643</b>	<b>486</b>	643	486	32	535	585	532	588	<b>532</b>	<b>588</b>
401.bzip2	32	890	347	895	345	<b>891</b>	<b>347</b>	32	875	353	872	354	<b>872</b>	<b>354</b>
403.gcc	32	501	514	<b>504</b>	<b>511</b>	506	509	32	501	514	<b>504</b>	<b>511</b>	506	509
429.mcf	32	<b>302</b>	<b>965</b>	303	963	302	966	32	<b>302</b>	<b>965</b>	303	963	302	966
445.gobmk	32	699	480	<b>697</b>	<b>481</b>	697	481	32	<b>681</b>	<b>493</b>	680	494	682	492
456.hammer	32	<b>334</b>	<b>894</b>	333	898	335	892	32	305	980	<b>305</b>	<b>978</b>	306	977
458.sjeng	32	806	481	811	477	<b>808</b>	<b>479</b>	32	778	497	783	495	<b>779</b>	<b>497</b>
462.libquantum	32	153	4330	<b>153</b>	<b>4330</b>	153	4330	32	153	4330	<b>153</b>	<b>4330</b>	153	4330
464.h264ref	32	875	809	<b>874</b>	<b>810</b>	873	812	32	867	817	862	821	<b>863</b>	<b>820</b>
471.omnetpp	32	589	339	584	343	<b>586</b>	<b>341</b>	32	553	362	557	359	<b>556</b>	<b>360</b>
473.astar	32	605	372	<b>606</b>	<b>371</b>	606	371	32	605	372	<b>606</b>	<b>371</b>	606	371
483.xalancbmk	32	308	716	<b>308</b>	<b>716</b>	308	718	32	308	716	<b>308</b>	<b>716</b>	308	718

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /spec/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on huawei Wed Apr 2 12:31:01 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 671

Huawei RH2288H v2

SPECint\_rate\_base2006 = 648

CPU2006 license: 3175

Test date: Apr-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132103760 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux huawei 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 2 12:25
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  193G   56G  128G  31% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV372 12/21/2013
Memory:
16x NO DIMM NO DIMM
2x Samsung M393B2G70DB0-CMA 16 GB 1866 MHz 2 rank
6x Samsung M393B2G70QH0-CMA 16 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

The Huawei RH2288H v2 and Huawei RH2288 v2 and the Huawei RH1288 v2 models  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2

SPECint\_rate2006 = 671

SPECint\_rate\_base2006 = 648

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## General Notes (Continued)

are electronically equivalent, and the results have been measured on a Huawei RH2288H v2 model.

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei RH2288H v2

SPECint\_rate2006 = 671  
SPECint\_rate\_base2006 = 648

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei RH2288H v2

SPECint\_rate2006 = 671  
SPECint\_rate\_base2006 = 648

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:18:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 May 2014.