



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2643 v3, 3.40 GHz)

SPECint®_rate2006 = 690

SPECint_rate_base2006 = 669

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

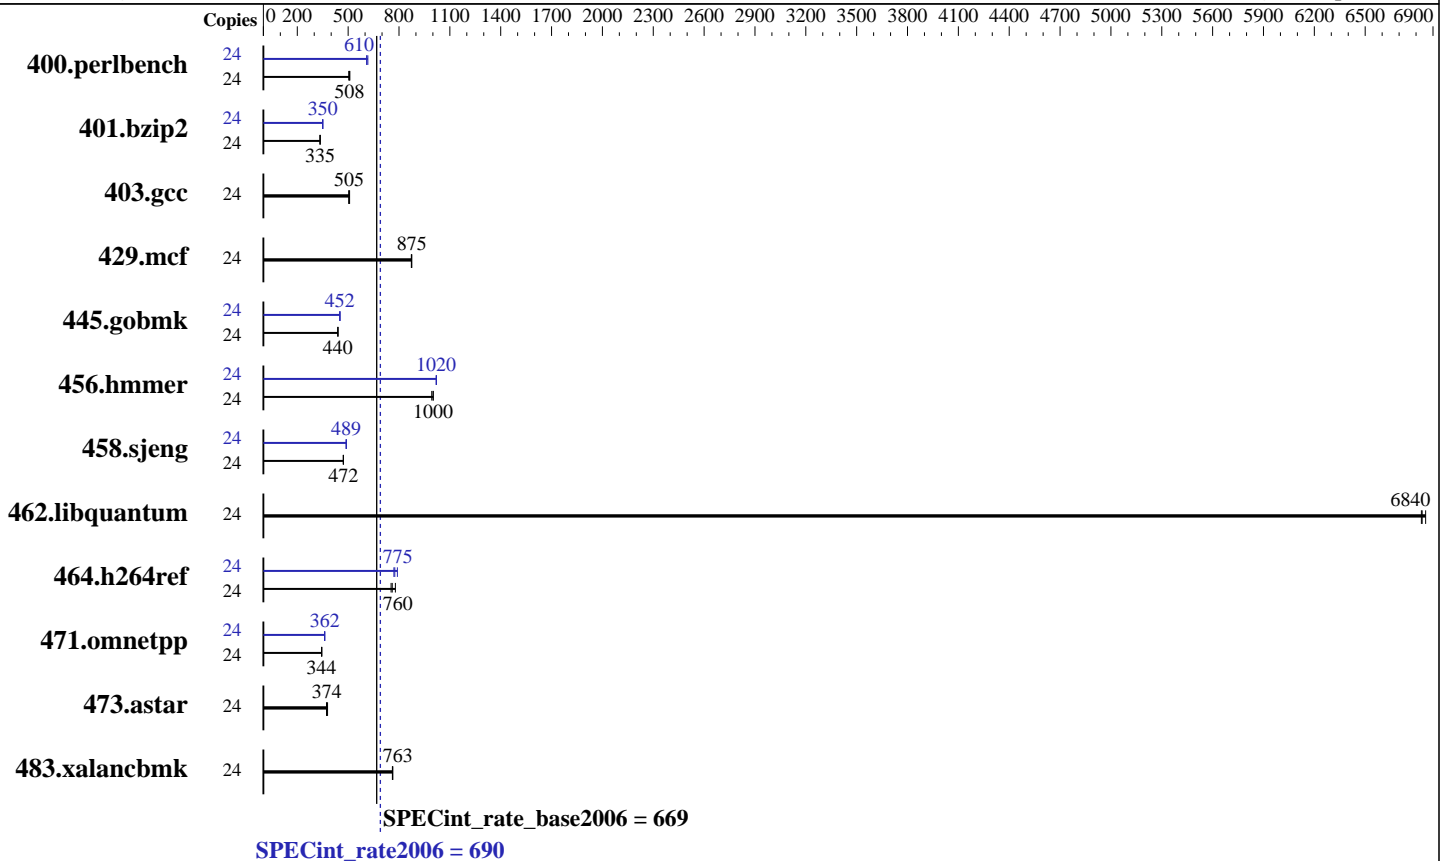

Hardware

CPU Name: Intel Xeon E5-2643 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2643 v3, 3.40 GHz)

SPECint_rate2006 = 690

SPECint_rate_base2006 = 669

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	466	503	460	510	<u>461</u>	<u>508</u>	24	380	616	385	609	<u>384</u>	<u>610</u>
401.bzip2	24	690	336	<u>692</u>	<u>335</u>	694	334	24	660	351	662	350	<u>661</u>	<u>350</u>
403.gcc	24	<u>382</u>	<u>505</u>	380	509	384	504	24	<u>382</u>	<u>505</u>	380	509	384	504
429.mcf	24	<u>250</u>	<u>875</u>	250	875	251	873	24	<u>250</u>	<u>875</u>	250	875	251	873
445.gobmk	24	572	440	573	439	<u>573</u>	<u>440</u>	24	559	450	557	452	<u>557</u>	<u>452</u>
456.hammer	24	225	993	223	1000	<u>224</u>	<u>1000</u>	24	220	1020	<u>220</u>	<u>1020</u>	219	1020
458.sjeng	24	616	471	<u>615</u>	<u>472</u>	615	472	24	<u>594</u>	<u>489</u>	594	489	594	489
462.libquantum	24	72.5	6860	72.8	6830	<u>72.7</u>	<u>6840</u>	24	72.5	6860	72.8	6830	<u>72.7</u>	<u>6840</u>
464.h264ref	24	682	779	705	753	<u>699</u>	<u>760</u>	24	690	770	<u>685</u>	<u>775</u>	672	791
471.omnetpp	24	435	345	437	344	<u>436</u>	<u>344</u>	24	<u>415</u>	<u>362</u>	415	361	414	362
473.astar	24	445	379	452	373	<u>450</u>	<u>374</u>	24	445	379	452	373	<u>450</u>	<u>374</u>
483.xalancbmk	24	<u>217</u>	<u>763</u>	217	763	218	761	24	<u>217</u>	<u>763</u>	217	763	218	761

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Early Snoop

Virtualization Technology disabled

Execute Disable disabled

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on linux Fri Jun 27 15:36:44 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2643 v3 @ 3.40GHz

2 "physical id"s (chips)

24 "processors"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 690

PowerEdge R730 (Intel Xeon E5-2643 v3, 3.40 GHz)

SPECint_rate_base2006 = 669

CPU2006 license: 55

Test date: Jun-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      264572220 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 27 15:36 last=S

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  267G  8.8G  257G   4% /
```

Additional information from dmidecode:

```
BIOS Dell Inc. 0.3.24 06/12/2014
Memory:
1x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2133 MHz
8x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2133 MHz
7x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2133 MHz
8x Not Specified Not Specified
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org
http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 690

PowerEdge R730 (Intel Xeon E5-2643 v3, 3.40 GHz)

SPECint_rate_base2006 = 669

CPU2006 license: 55

Test date: Jun-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

General Notes (Continued)

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarthearp

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2643 v3,
3.40 GHz)

SPECint_rate2006 = 690

SPECint_rate_base2006 = 669

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2643 v3, 3.40 GHz)

SPECint_rate2006 = 690

SPECint_rate_base2006 = 669

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jun-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:20:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2014.