



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint®\_rate2006 = 903

Lenovo ThinkServer RD450 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 869

CPU2006 license: 9017


Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

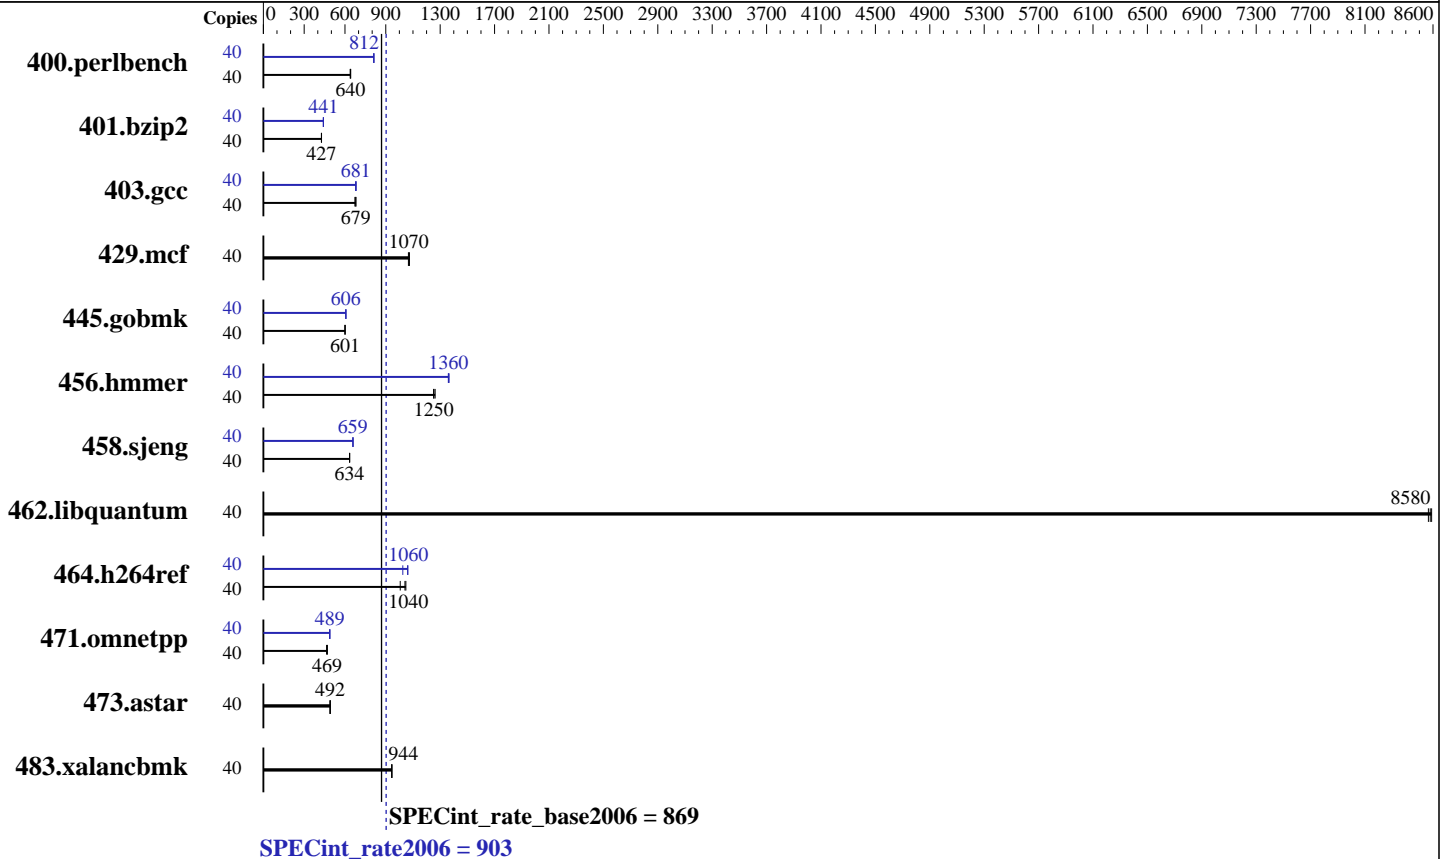

### Hardware

CPU Name: Intel Xeon E5-2660 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD450 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECint\_rate2006 = 903

SPECint\_rate\_base2006 = 869

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	608	642	<b>611</b>	<b>640</b>	612	639	40	<b>481</b>	<b>812</b>	481	813	482	811
401.bzip2	40	905	427	<b>904</b>	<b>427</b>	903	428	40	<b>875</b>	<b>441</b>	875	441	874	442
403.gcc	40	<b>474</b>	<b>679</b>	473	681	479	673	40	472	682	<b>473</b>	<b>681</b>	475	678
429.mcf	40	340	1070	342	1070	<b>341</b>	<b>1070</b>	40	340	1070	342	1070	<b>341</b>	<b>1070</b>
445.gobmk	40	698	601	<b>699</b>	<b>601</b>	699	600	40	691	607	<b>692</b>	<b>606</b>	692	606
456.hammer	40	298	1250	<b>298</b>	<b>1250</b>	295	1260	40	274	1360	<b>274</b>	<b>1360</b>	273	1370
458.sjeng	40	764	633	<b>764</b>	<b>634</b>	763	635	40	<b>735</b>	<b>659</b>	735	659	735	658
462.libquantum	40	96.8	8570	96.5	8590	<b>96.6</b>	<b>8580</b>	40	96.8	8570	96.5	8590	<b>96.6</b>	<b>8580</b>
464.h264ref	40	880	1010	845	1050	<b>850</b>	<b>1040</b>	40	<b>835</b>	<b>1060</b>	863	1030	833	1060
471.omnetpp	40	<b>533</b>	<b>469</b>	532	470	538	465	40	511	489	<b>512</b>	<b>489</b>	513	487
473.astar	40	<b>571</b>	<b>492</b>	571	492	574	489	40	<b>571</b>	<b>492</b>	571	492	574	489
483.xalancbmk	40	292	944	<b>292</b>	<b>944</b>	292	945	40	292	944	<b>292</b>	<b>944</b>	292	945

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```

BIOS configuration:
Cluster On Die set to Enabled
Early Snoop set to Disabled
Performance Profile set to Custom
C1E Support set to Disabled
Core C3 set to Disabled
Core C6 set to Disabled
Thermal Profile set to High Fan Speed
Memory Power Savings set to Disabled
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on RD450 Wed Oct 29 23:33:17 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 903

Lenovo ThinkServer RD450 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 869

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 5
  siblings  : 10
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB

```

```

From /proc/meminfo
MemTotal:      263856844 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux RD450 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 29 23:31

```

SPEC is set to: /usr/cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2       xfs       741G      82G  659G  12% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO VB3TS110 10/05/2014

Memory:  
16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 903**

Lenovo ThinkServer RD450 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 869**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Platform Notes (Continued)

(End of data from sysinfo program)  
RD450 support 4 channels and 8 DIMMs per processor, total 8 channels and 16 DIMMs. All 16 DIMM slots installed with 16 GB DIMM for this run.

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32  
C++ benchmarks:  
icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 903**

Lenovo ThinkServer RD450 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 869**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 903**

Lenovo ThinkServer RD450 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 869**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-HSW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-HSW-revC.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD450 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECint\_rate2006 = 903

SPECint\_rate\_base2006 = 869

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014

**Hardware Availability:** Dec-2014

**Software Availability:** Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jan 14 10:28:36 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 January 2015.