



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 1590

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 1550

CPU2006 license: 55


Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

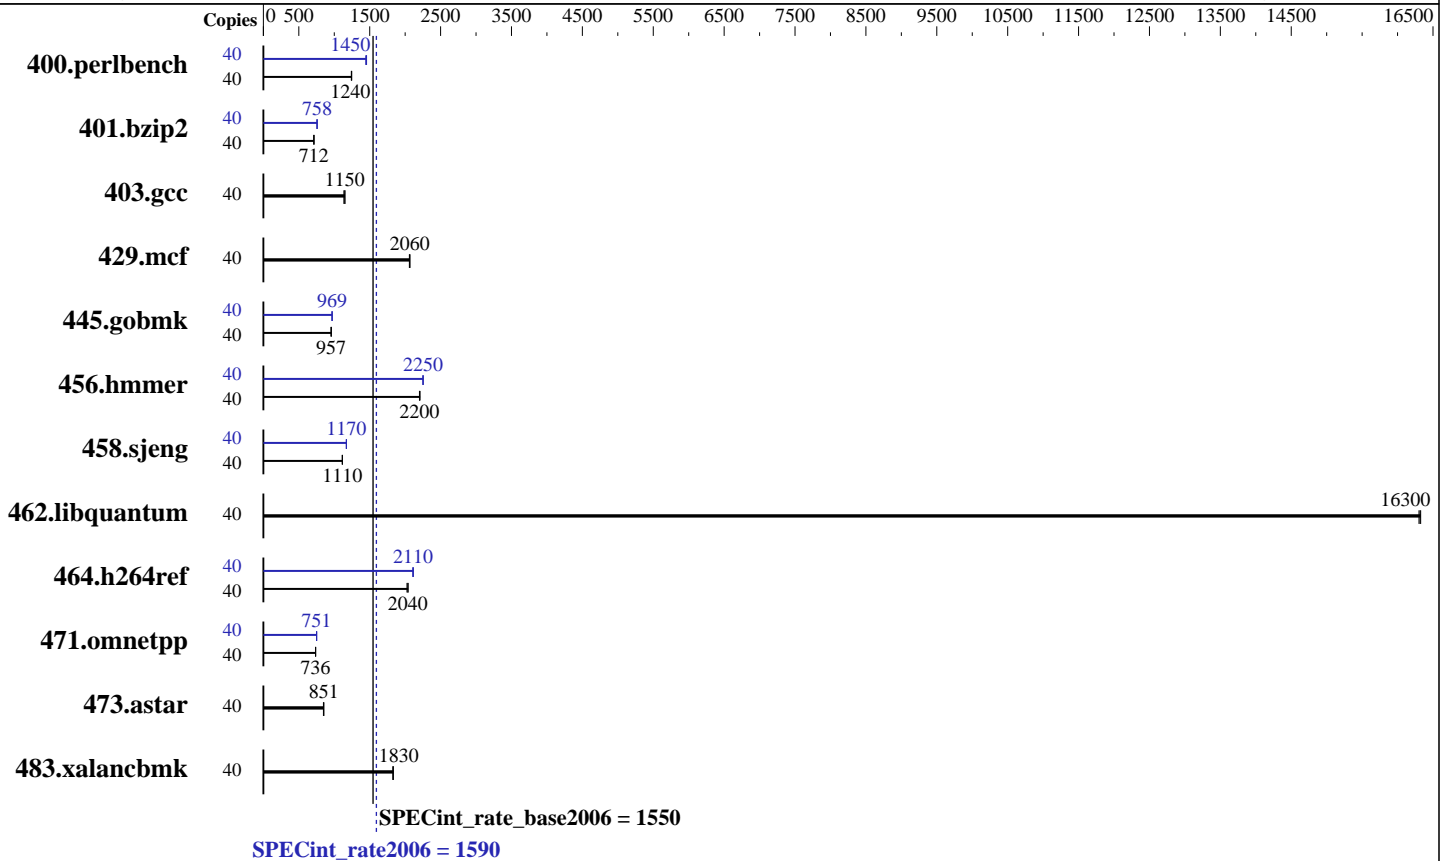

## Hardware

CPU Name: Intel Xeon E5-4627 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip  
 CPU(s) orderable: 4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 400 GB 7200 RPM SATA  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12  
 3.12.28-4-default  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1590

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 1550

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	40	315	1240	<b><u>314</u></b>	<b><u>1240</u></b>	314	1250	40	271	1440	268	1460	<b><u>269</u></b>	<b><u>1450</u></b>		
401.bzip2	40	541	713	<b><u>542</u></b>	<b><u>712</u></b>	542	712	40	<b><u>509</u></b>	<b><u>758</u></b>	509	758	510	757		
403.gcc	40	280	1150	<b><u>280</u></b>	<b><u>1150</u></b>	284	1140	40	280	1150	<b><u>280</u></b>	<b><u>1150</u></b>	284	1140		
429.mcf	40	<b><u>177</u></b>	<b><u>2060</u></b>	177	2060	176	2070	40	<b><u>177</u></b>	<b><u>2060</u></b>	177	2060	176	2070		
445.gobmk	40	439	957	439	957	<b><u>439</u></b>	<b><u>957</u></b>	40	433	970	<b><u>433</u></b>	<b><u>969</u></b>	433	969		
456.hammer	40	169	2210	<b><u>169</u></b>	<b><u>2200</u></b>	169	2200	40	166	2250	166	2250	<b><u>166</u></b>	<b><u>2250</u></b>		
458.sjeng	40	434	1110	<b><u>434</u></b>	<b><u>1110</u></b>	435	1110	40	<b><u>413</u></b>	<b><u>1170</u></b>	413	1170	414	1170		
462.libquantum	40	50.8	16300	50.8	16300	<b><u>50.8</u></b>	<b><u>16300</u></b>	40	50.8	16300	50.8	16300	<b><u>50.8</u></b>	<b><u>16300</u></b>		
464.h264ref	40	434	2040	<b><u>434</u></b>	<b><u>2040</u></b>	437	2030	40	<b><u>419</u></b>	<b><u>2110</u></b>	420	2110	419	2110		
471.omnetpp	40	<b><u>339</u></b>	<b><u>736</u></b>	339	738	340	735	40	<b><u>333</u></b>	<b><u>751</u></b>	333	750	332	752		
473.astar	40	331	847	<b><u>330</u></b>	<b><u>851</u></b>	329	853	40	331	847	<b><u>330</u></b>	<b><u>851</u></b>	329	853		
483.xalancbmk	40	151	1830	<b><u>151</u></b>	<b><u>1830</u></b>	151	1830	40	151	1830	<b><u>151</u></b>	<b><u>1830</u></b>	151	1830		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Early Snoop

Virtualization Technology disabled

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-3aq4 Fri Feb 6 21:38:29 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-4627 v3 @ 2.60GHz

4 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1590

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 1550

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 10
siblings  : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

```

From /proc/meminfo

```

MemTotal:      529334376 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0

```

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

```

NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

```

uname -a:

```

Linux linux-3aq4 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 6 21:37 last=5

SPEC is set to: /root/cpu2006-1.2

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  267G  11G  256G   4% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 01/08/2015

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1590

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 1550

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

## Platform Notes (Continued)

Memory:

32x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz  
16x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1590

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 1550

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1590

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 1550

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1590

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECint\_rate\_base2006 = 1550

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 2 12:38:24 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 June 2015.