



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-M motherboard  
(C7Z170-M, Intel Core i5-6400T)

SPECfp®\_rate2006 = 153

SPECfp\_rate\_base2006 = 149

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

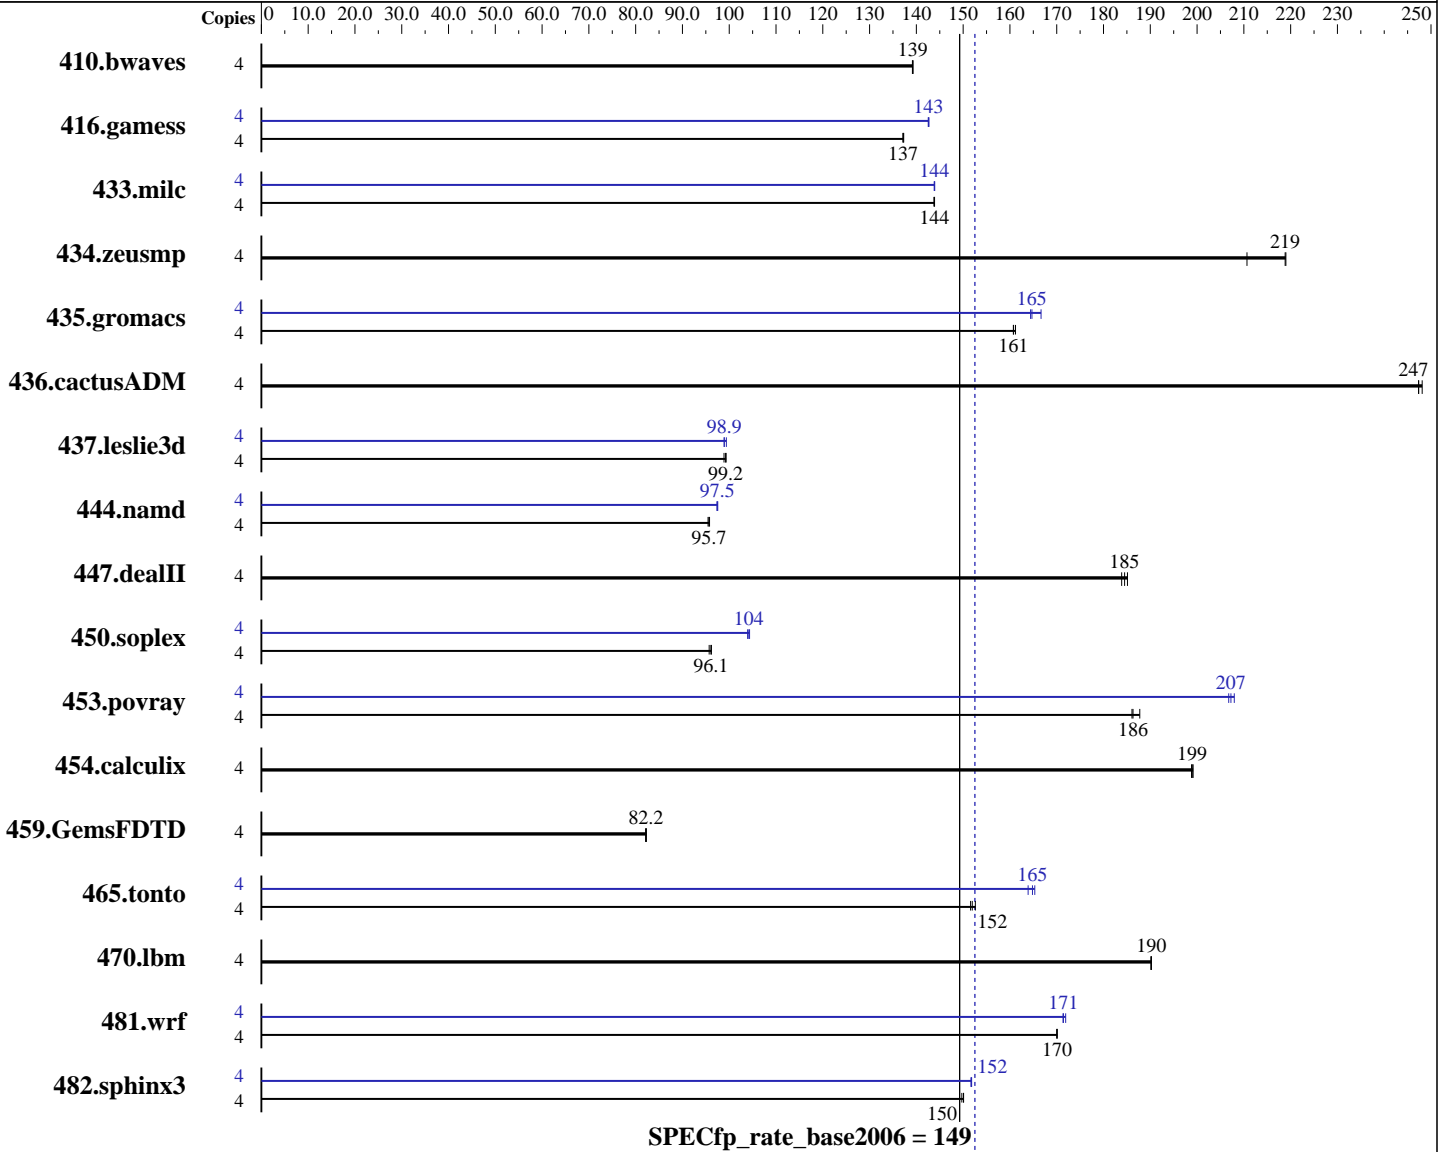

### Hardware

CPU Name: Intel Core i5-6400T  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-M motherboard  
(C7Z170-M, Intel Core i5-6400T)

SPECfp\_rate2006 = 153

SPECfp\_rate\_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB 1Rx8 PC4-2666P-U, running at 2133 MHz)  
Disk Subsystem: 1 x 200 GB SATA III SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<b>390</b>	<b>139</b>	391	139	390	139	4	<b>390</b>	<b>139</b>	391	139	390	139
416.gamess	4	571	137	570	137	<b>571</b>	<b>137</b>	4	549	143	<b>549</b>	<b>143</b>	549	143
433.milc	4	<b>255</b>	<b>144</b>	255	144	255	144	4	<b>255</b>	<b>144</b>	255	144	255	144
434.zeusmp	4	173	211	<b>166</b>	<b>219</b>	166	219	4	173	211	<b>166</b>	<b>219</b>	166	219
435.gromacs	4	<b>178</b>	<b>161</b>	178	161	177	161	4	174	164	<b>173</b>	<b>165</b>	171	167
436.cactusADM	4	<b>193</b>	<b>247</b>	193	248	193	247	4	<b>193</b>	<b>247</b>	193	248	193	247
437.leslie3d	4	380	98.9	379	99.3	<b>379</b>	<b>99.2</b>	4	380	98.9	<b>380</b>	<b>98.9</b>	378	99.4
444.namd	4	335	95.8	336	95.5	<b>335</b>	<b>95.7</b>	4	329	97.5	<b>329</b>	<b>97.5</b>	329	97.4
447.dealII	4	249	184	247	185	<b>248</b>	<b>185</b>	4	249	184	247	185	<b>248</b>	<b>185</b>
450.soplex	4	<b>347</b>	<b>96.1</b>	349	95.7	347	96.2	4	320	104	<b>320</b>	<b>104</b>	321	104
453.povray	4	113	188	114	186	<b>114</b>	<b>186</b>	4	103	207	<b>103</b>	<b>207</b>	102	208
454.calculix	4	166	199	166	199	<b>166</b>	<b>199</b>	4	166	199	166	199	<b>166</b>	<b>199</b>
459.GemsFDTD	4	<b>516</b>	<b>82.2</b>	516	82.3	517	82.1	4	<b>516</b>	<b>82.2</b>	516	82.3	517	82.1
465.tonto	4	260	152	<b>259</b>	<b>152</b>	258	153	4	238	165	<b>239</b>	<b>165</b>	240	164
470.lbm	4	<b>289</b>	<b>190</b>	289	190	289	190	4	<b>289</b>	<b>190</b>	289	190	289	190
481.wrf	4	<b>263</b>	<b>170</b>	263	170	263	170	4	260	172	261	171	<b>261</b>	<b>171</b>
482.sphinx3	4	521	150	519	150	<b>519</b>	<b>150</b>	4	514	152	<b>514</b>	<b>152</b>	514	152

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-M motherboard  
(C7Z170-M, Intel Core i5-6400T)

SPECfp\_rate2006 = 153

SPECfp\_rate\_base2006 = 149

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2015  
**Hardware Availability:** Sep-2015  
**Software Availability:** Sep-2014

### Platform Notes

As tested, the system used a Supermicro CSE-731i-300B chassis.  
The chassis is configured with a PWS-305-PQ power supply, 1 SNK-P0046A4 heatsink, as well as 1 FAN-0108L4 rear cooling fan.  
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on C7Z170-01 Fri Oct 30 08:02:31 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Core(TM) i5-6400T CPU @ 2.20GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 6144 KB
```

```
From /proc/meminfo
MemTotal:      16334556 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux C7Z170-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 30 01:22

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   183G   36G  147G  20% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-M motherboard  
(C7Z170-M, Intel Core i5-6400T)

SPECfp\_rate2006 = 153

SPECfp\_rate\_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. T20151015150001 10/15/2015

Memory:

4x 0420 F4-2666C15-4GRR 4 GB 1 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-M motherboard  
(C7Z170-M, Intel Core i5-6400T)

SPECfp\_rate2006 = 153

SPECfp\_rate\_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias
```

### C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias
```

### Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

### Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias
```

## Peak Compiler Invocation

### C benchmarks:

```
icc -m64
```

### C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

### Fortran benchmarks:

```
ifort -m64
```

### Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-M motherboard  
(C7Z170-M, Intel Core i5-6400T)

SPECfp\_rate2006 = 153

SPECfp\_rate\_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -prof-gen(pass 1) -ipo -O3 -no-prec-div
            -prof-use(pass 2) -unroll2

```

### C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

### Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7Z170-M motherboard  
(C7Z170-M, Intel Core i5-6400T)

**SPECfp\_rate2006 = 153**

**SPECfp\_rate\_base2006 = 149**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2015

**Hardware Availability:** Sep-2015

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:14:38 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.