



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp®2006 = 71.2

SPECfp_base2006 = 69.2

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

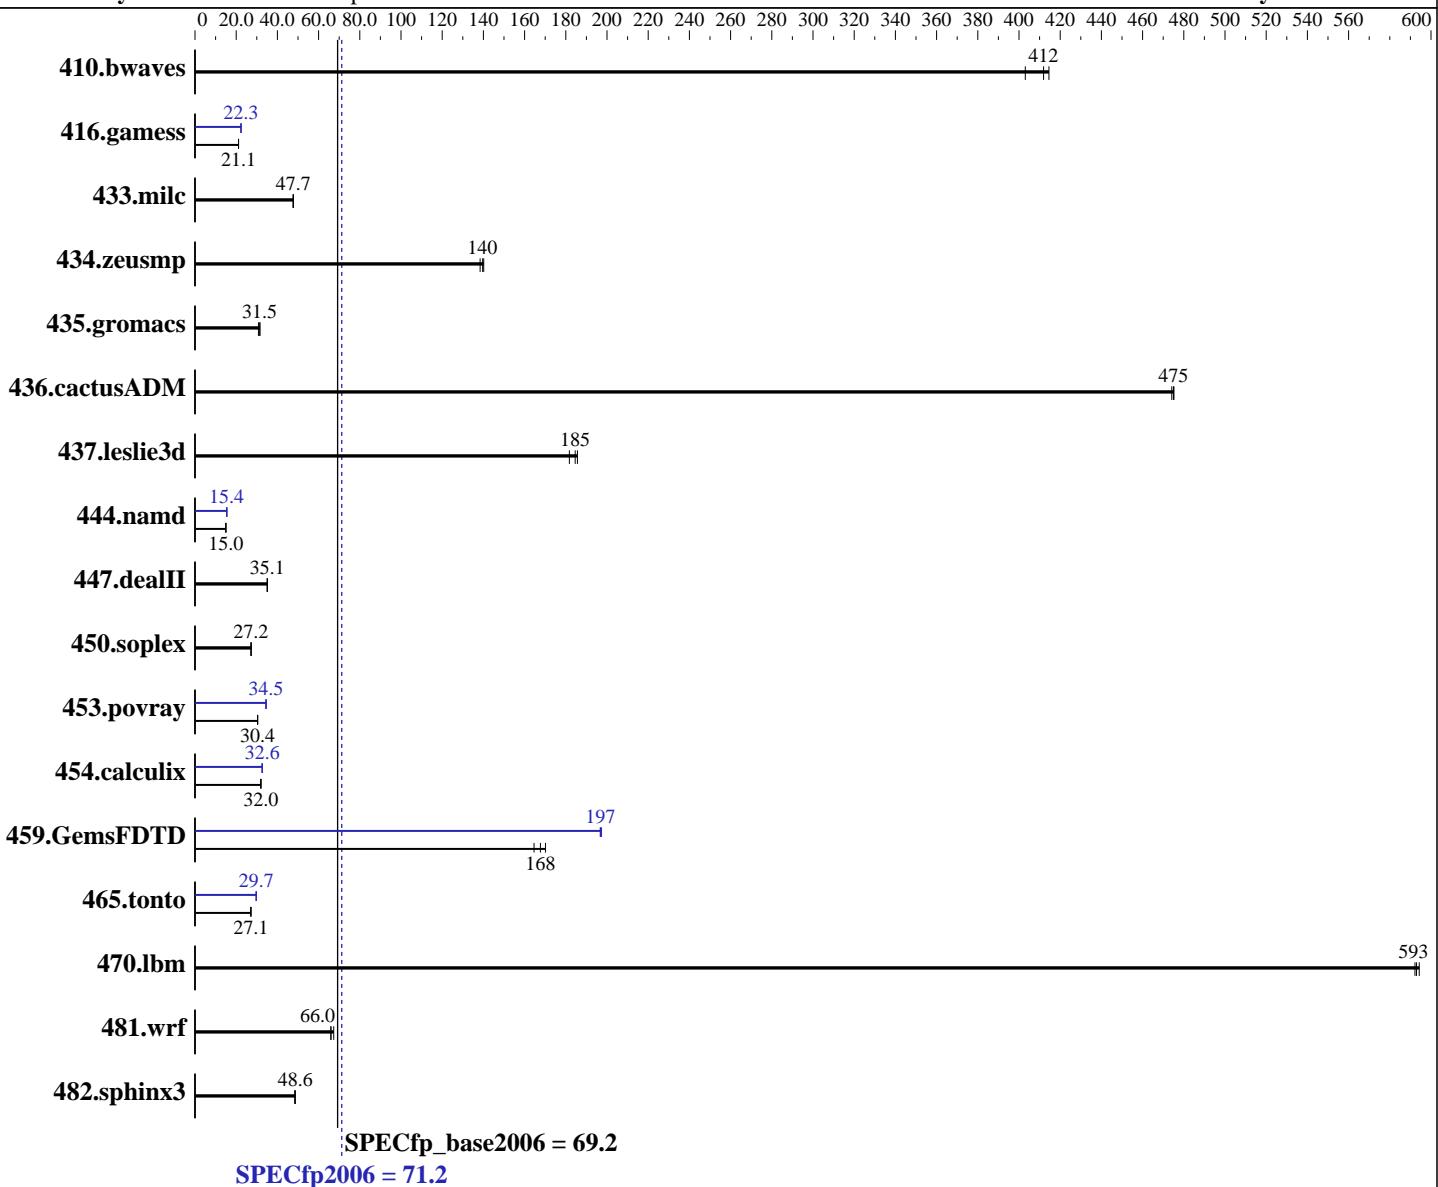

Hardware

CPU Name:	Intel Xeon E5-2603 v4
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64)
	Kernel 3.12.28-4-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
	Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp2006 = 71.2

SPECfp_base2006 = 69.2

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	33.7	403	<u>33.0</u>	<u>412</u>	32.8	415	33.7	403	<u>33.0</u>	<u>412</u>	32.8	415
416.gamess	927	21.1	<u>926</u>	<u>21.1</u>	926	21.1	876	22.4	878	22.3	<u>876</u>	<u>22.3</u>
433.milc	192	47.7	193	47.7	<u>192</u>	<u>47.7</u>	192	47.7	193	47.7	<u>192</u>	<u>47.7</u>
434.zeusmp	65.7	138	64.9	140	<u>65.2</u>	<u>140</u>	65.7	138	64.9	140	<u>65.2</u>	<u>140</u>
435.gromacs	<u>227</u>	<u>31.5</u>	227	31.5	232	30.8	<u>227</u>	<u>31.5</u>	227	31.5	232	30.8
436.cactusADM	25.2	474	<u>25.2</u>	<u>475</u>	25.1	475	25.2	474	<u>25.2</u>	<u>475</u>	25.1	475
437.leslie3d	<u>50.9</u>	<u>185</u>	51.7	182	50.6	186	<u>50.9</u>	<u>185</u>	51.7	182	50.6	186
444.namd	535	15.0	535	15.0	<u>535</u>	<u>15.0</u>	<u>519</u>	<u>15.4</u>	519	15.4	520	15.4
447.dealII	327	35.0	326	35.1	<u>326</u>	<u>35.1</u>	327	35.0	326	35.1	<u>326</u>	<u>35.1</u>
450.soplex	306	27.3	<u>306</u>	<u>27.2</u>	306	27.2	306	27.3	<u>306</u>	<u>27.2</u>	306	27.2
453.povray	175	30.4	<u>175</u>	<u>30.4</u>	175	30.4	<u>154</u>	34.5	<u>154</u>	<u>34.5</u>	155	34.4
454.calculix	258	32.0	258	31.9	<u>258</u>	<u>32.0</u>	<u>253</u>	<u>32.6</u>	253	32.6	253	32.6
459.GemsFDTD	62.4	170	<u>63.3</u>	<u>168</u>	64.5	165	53.8	197	<u>53.9</u>	<u>197</u>	53.9	197
465.tonto	363	27.1	<u>363</u>	<u>27.1</u>	362	27.2	331	29.7	<u>331</u>	<u>29.7</u>	331	29.7
470.lbm	23.2	592	23.1	594	<u>23.2</u>	<u>593</u>	23.2	592	23.1	594	<u>23.2</u>	<u>593</u>
481.wrf	166	67.3	<u>169</u>	<u>66.0</u>	169	65.9	166	67.3	<u>169</u>	<u>66.0</u>	169	65.9
482.sphinx3	<u>401</u>	<u>48.6</u>	402	48.4	401	48.6	<u>401</u>	<u>48.6</u>	402	48.4	401	48.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Operating Mode set to Maximum Performance

```
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
$Rev: 6914 $ $Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1
running on linux-gj7w Thu Apr  7 02:41:31 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp2006 = 71.2

SPECfp_base2006 = 69.2

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 v4@ 1.70GHz
        2 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 6
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      263830844 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-gj7w 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 6 17:31
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   703G   11G  693G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp2006 = 71.2

SPECfp_base2006 = 69.2

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes (Continued)

BIOS LENOVO -[TBE123H-2.10]- 03/25/2016

Memory:

8x NO DIMM Unknown

16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz, configured at 1867 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp2006 = 71.2

SPECfp_base2006 = 69.2

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Base Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp2006 =

71.2

SPECfp_base2006 =

69.2

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(1.70 GHz, Intel Xeon E5-2603 v4)

SPECfp2006 = 71.2

SPECfp_base2006 = 69.2

CPU2006 license: 9017

Test date: Apr-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 3 18:01:44 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 May 2016.